

Internet Engineering Task Force
Internet-Draft
Intended status: Experimental
Expires: July 24, 2014

R. Cole
US Army CERDEC
J. Macker
B. Adamson
Naval Research Laboratory
January 20, 2014

Definition of Managed Objects for the Manet Simplified Multicast
Framework Relay Set Process
draft-ietf-manet-smf-mib-09

Abstract

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes objects for configuring aspects of the Simplified Multicast Forwarding (SMF) process for Mobile Ad-Hoc Networks (MANETs). The SMF-MIB module also reports state information, performance information, and notifications. In addition to configuration, the additional state and performance information is useful to operators troubleshooting multicast forwarding problems.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on July 24, 2014.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	3
2. The Internet-Standard Management Framework	3
3. Conventions	3
4. Overview	3
4.1. SMF Management Model	4
4.2. Terms	5
5. Structure of the MIB Module	5
5.1. Textual Conventions	6
5.2. The Capabilities Group	6
5.3. The Configuration Group	7
5.4. The State Group	7
5.5. The Performance Group	7
5.6. The Notifications Group	8
5.7. Tables and Indexing	8
6. Relationship to Other MIB Modules	9
6.1. Relationship to the SNMPv2-MIB	9
6.2. MIB modules required for IMPORTS	9
6.3. Relationship to the Future RSSA-MIB Modules	10
7. Definitions	10
8. Security Considerations	50
9. Applicability Statement	54
10. IANA Considerations	56
11. Contributors	56
12. Acknowledgements	56
13. References	56
13.1. Normative References	56
13.2. Informative References	57
Appendix A. Appendix A:	58
Appendix B. Appendix B:	60
Appendix C.	63

1. Introduction

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it describes objects for configuring aspects of a process implementing Simplified Multicast Forwarding (SMF) [RFC6621] for Mobile Ad-Hoc Networks (MANETs). SMF provides multicast Duplicate Packet Detection (DPD) and supports algorithms for constructing an estimate of a MANET Minimum Connected Dominating Set (MCDS) for efficient multicast forwarding. The SMF-MIB module also reports state information, performance information, and notifications. In addition to configuration, this additional state and performance information is useful to operators troubleshooting multicast forwarding problems.

2. The Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to section 7 of RFC 3410 [RFC3410].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies a MIB module that is compliant to the SMIv2, which is described in STD 58, RFC 2578 [RFC2578], STD 58, RFC 2579 [RFC2579] and STD 58, RFC 2580 [RFC2580].

3. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [RFC2119].

4. Overview

SMF provides methods for implementing Duplicate Packet Detection (DPD)-based multicast forwarding with the optional use of Connected Dominating Set (CDS)-based relay sets. The CDS provides a complete connected coverage of the nodes comprising the MANET. The Minimum CDS (MCDS) is the smallest set of MANET nodes (comprising a connected cluster) which cover all the nodes in the cluster with their transmissions. As the density of the MANET nodes increase, the fraction of nodes required in an MCDS decreases. Using the MCDS as a multicast forwarding set then becomes an efficient multicast mechanism for MANETs.

Various algorithms for the construction of estimates of the MCDS exist. The Simplified Multicast Framework [RFC6621] describes some of these. It further defines various operational modes for a node which is participating in the collective creation of the MCDS estimates. These modes depend upon the set of related MANET routing and discovery protocols and mechanisms in operation in the specific MANET node.

A SMF router's MIB module contains SMF process configuration parameters (e.g. specific CDS algorithm), state information (e.g., current membership in the CDS), performance counters (e.g., packet counters), and notifications.

4.1. SMF Management Model

This section describes the management model for the SMF node process.

Figure 1 (reproduced from Figure 1 of [RFC6621]) shows the relationship between the SMF Relay Set selection algorithm and the related algorithms, processes and protocols running in the MANET nodes. The Relay Set Selection Algorithm (RSSA) can rely upon topology information gotten from the MANET Neighborhood Discovery Protocol (NHDP), from the specific MANET routing protocol running on the node, or from Layer 2 information passed up to the higher layer protocol processes.

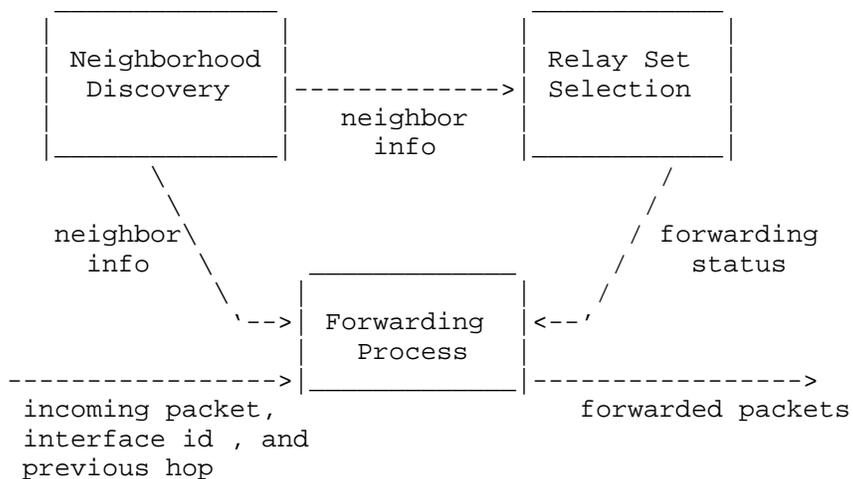


Figure 1: SMF Router Architecture

4.2. Terms

The following definitions apply throughout this document:

- o Configuration Objects - switches, tables, objects which are initialized to default settings or set through the management interfaces such as defined by this MIB module.
- o Tunable Configuration Objects - objects whose values affect timing or attempt bounds on the SMF Relay Set (RS) process.
- o State Objects - automatically generated values which define the current operating state of the SMF RS process in the router.
- o Performance Objects - automatically generated values which help an administrator or automated tool to assess the performance of the CDS multicast process on the router and the overall multicast performance within the MANET routing domain.

5. Structure of the MIB Module

This section presents the structure of the SMF-MIB module. The objects are arranged into the following groups:

- o smfMIBNotifications - defines the notifications associated with the SMF process.

- o smfMIBObjects - defines the objects forming the basis for the SMF-MIB module. These objects are divided up by function into the following groups:
 - * Capabilities Group - This group contains the SMF objects that the device uses to advertise its local capabilities with respect to, e.g., the supported RSSAs.
 - * Configuration Group - This group contains the SMF objects that configure specific options that determine the overall operation of the SMF process and the resulting multicast performance.
 - * State Group - Contains information describing the current state of the SMF process such as the Neighbor Table.
 - * Performance Group - Contains objects which help to characterize the performance of the SMF process, typically counters for statistical computations.
- o smfMIBConformance - defines two, i.e., minimal and full, conformance implementations for the SMF-MIB module.

5.1. Textual Conventions

The textual conventions defined within the SMF-MIB module are:

- o The SmfStatus is defined within the SMF-MIB module. This contains the current operational status of the SMF process on an interface.

The textual conventions defined for the SMF-MIB module and maintained by IANA are:

- o The IANAsmfOpModeIdTC represents an index that identifies a specific SMF operational mode. This textual convention is maintained by IANA in the IANAsmfOpModeID-MIB.
- o The IANAsmfRssaIdTC represents an index that identifies, through reference, a specific RSSA available for operation on the device. This textual convention is maintained by IANA in the IANAsmfRssaID-MIB.

5.2. The Capabilities Group

The SMF device supports a set of capabilities. The list of capabilities which the device can advertise are:

- o Operational Mode - topology information from NHDP, CDS-aware unicast routing or Cross-layer from Layer 2.
- o SMF RSSA - the specific RSSA operational on the device. Note that configuration, state and performance objects related to a specific RSSA must be defined within a separate MIB module.

5.3. The Configuration Group

The SMF device is configured with a set of controls. Some of the prominent configuration controls for the SMF device are:

- o Operational Mode - determines where topology information is derived from, e.g., NHDP, CDS-aware unicast routing or Cross-layer from Layer 2.
- o SMF RSSA - the specific RSSA operational on the device.
- o Duplicate Packet detection for IPv4 - Identification-based or Hash-based DPD.
- o Duplicate Packet detection for IPv6 - Identification-based or Hash-based DPD.
- o SMF Type Message TLV - if NHDP mode is selected, then the SMF Type Message TLV MAY be included in the NHDP exchanges.
- o SMF Address Block TLV - if NHDP mode is selected, then the SMF Address Block TLV SHOULD be included in the NHDP exchanges.

5.4. The State Group

The State sub-tree reports current state information, e.g.,

- o Node RSSA State - identifies whether the node is currently in or out of the Relay Set.
- o Neighbors Table - a table containing current one-hop neighbors and their operational RSSA.

5.5. The Performance Group

The Performance sub-tree reports primarily counters that relate to SMF RSSA performance. The SMF performance counters consists of per node and per interface objects:

- o Total multicast packets received.
- o Total multicast packets forwarded.
- o Total duplicate multicast packets detected.
- o Per interface statistics table with the following entries:
 - * Multicast packets received.
 - * Multicast packets forwarded.
 - * Duplicate multicast packets detected.

5.6. The Notifications Group

The Notifications Sub-tree contains the list of notifications supported within the SMF-MIB module and their intended purpose and utility.

5.7. Tables and Indexing

The SMF-MIB module contains a number of tables which record data related to:

- o configuration and operation of packet forwarding on the local router,
- o configuration and operation of local MANET interfaces on the router, and
- o configuration and operation of various RSSA algorithms for packet forwarding.

The SMF-MIB module's tables are indexed via the following constructs:

- o `smfCapabilitiesIndex` - the index identifying the combination of SMF mode and SMF RSSA available on this device.
- o `smfCfgAddrForwardingAddrType`, `smfCfgAddrForwardingAddress` and `smfCfgAddrForwardingAddrPrefixLength` - indexes to configured multicast addresses which are forwarded by the SMF process.
- o `smfCfgIfIndex` - the `IfIndex` of the interface on the local router on which SMF is configured.
- o `smfStateNeighborIpAddressType`, `smfStateNeighborIpAddress`, and `smfStateNeighborPrefixLen` - the interface index set of specific

one-hop neighbor nodes to this local router.

These tables and their associated indexing are:

- o smfCapabilitiesTable - identifies the resident set of (SMF Operational Modes, SMF RSSA algorithms) available on this router. This table has 'INDEX { smfCapabilitiesIndex }'.
- o smfCfgAddrForwardingTable - contains information on multicast addresses which are to be forwarded by the SMF process on this device. This table has 'INDEX { smfCfgAddrForwardingAddrType, smfCfgAddrForwardingAddress, smfCfgAddrForwardingAddrPrefixLength }'.
- o smfCfgInterfaceTable - describes the SMF interfaces on this device that are participating in the SMF packet forwarding process. This table has 'INDEX { smfCfgIfIndex }'.
- o smfStateNeighborTable - describes the current neighbor nodes, their addresses and the SMF RSSA and the interface on which they can be reached. This table has 'INDEX { smfStateNeighborIpAddrType, smfStateNeighborIpAddr, smfStateNeighborPrefixLen }'.
- o smfPerfIpv4InterfacePerfTable - contains the IPv4 related SMF statistics per each SMF interface on this device. This table has 'INDEX { smfCfgIfIndex }'.
- o smfPerfIpv6InterfacePerfTable - contains the IPv6 related SMF statistics per each SMF interface on this device. This table has 'INDEX { smfCfgIfIndex }'.

6. Relationship to Other MIB Modules

6.1. Relationship to the SNMPv2-MIB

The 'system' group in the SNMPv2-MIB module [RFC3418] is defined as being mandatory for all systems, and the objects apply to the entity as a whole. The 'system' group provides identification of the management entity and certain other system-wide data. The SMF-MIB module does not duplicate those objects.

6.2. MIB modules required for IMPORTS

The textual conventions imported for use in the SMF-MIB module are as follows. The MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE, Counter32, Unsigned32, Integer32 and mib-2 textual conventions are imported from RFC 2578 [RFC2578]. The TEXTUAL-CONVENTION, RowStatus

and TruthValue textual conventions are imported from RFC 2579 [RFC2579]. The MODULE-COMPLIANCE, OBJECT-GROUP and NOTIFICATION-GROUP textual conventions are imported from RFC 2580 [RFC2580]. The InterfaceIndexOrZero textual convention is imported from RFC 2863 [RFC2863]. The SnmpAdminString textual convention is imported from RFC 3411 [RFC3411]. The InetAddress, InetAddressType and InetAddressPrefixLength textual conventions are imported from RFC 4001 [RFC4001].

6.3. Relationship to the Future RSSA-MIB Modules

In a sense, the SMF-MIB module is a general front-end to a set of, yet to be developed, RSSA-specific MIB modules. These RSSA-specific MIB modules will define the objects for the configuration, state, performance and notification required for the operation of these specific RSSAs. The SMF-MIB module Capabilities Group allows the remote management station the ability to query the router to discover the set of supported RSSAs.

7. Definitions

```
SMF-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE,  
Counter32, Integer32, TimeTicks, experimental  
    FROM SNMPv2-SMI                -- [RFC2578]  
  
TEXTUAL-CONVENTION, RowStatus, TruthValue  
    FROM SNMPv2-TC                -- [RFC2579]  
  
MODULE-COMPLIANCE, OBJECT-GROUP,  
NOTIFICATION-GROUP  
    FROM SNMPv2-CONF              -- [RFC2580]  
  
InterfaceIndexOrZero  
    FROM IF-MIB                   -- [RFC2863]  
  
SnmpAdminString  
    FROM SNMP-FRAMEWORK-MIB       -- [RFC3411]  
  
InetAddress, InetAddressType,  
InetAddressPrefixLength  
    FROM INET-ADDRESS-MIB        -- [RFC4001]
```

```
IANAsmfOpModeIdTC
    FROM IANAsmfOpModeID-MIB
```

```
IANAsmfRssaIdTC
    FROM IANAsmfRssaID-MIB
```

```
;
```

```
smfMIB MODULE-IDENTITY
```

```
LAST-UPDATED "201309011300Z" -- September 01, 2013
```

```
ORGANIZATION "IETF MANET Working Group"
```

```
CONTACT-INFO
```

```
    "WG E-Mail: manet@ietf.org
```

```
    WG Chairs: sratliff@cisco.com
               jmacker@nrl.navy.mil
```

```
Editors:  Robert G. Cole
           US Army CERDEC
           Space and Terrestrial Communications
           6010 Frankford Road
           Aberdeen Proving Ground, MD 21005
           USA
           +1 443 395-8744
           robert.g.cole@us.army.mil
```

```
           Joseph Macker
           Naval Research Laboratory
           Washington, D.C. 20375
           USA
           macker@itd.nrl.navy.mil
```

```
           Brian Adamson
           Naval Research Laboratory
           Washington, D.C. 20375
           USA
           adamson@itd.nrl.navy.mil"
```

```
DESCRIPTION
```

```
"This MIB module contains managed object definitions for
the Manet SMF RSSA process defined in:
```

```
[SMF] Macker, J.(ed.),
Simplified Multicast Forwarding, RFC 6621,
May 2012.
```

```
Copyright (C) The IETF Trust (2012). This version
of this MIB module is part of RFC xxxx; see the RFC
```

```
        itself for full legal notices."

-- Revision History
REVISION    "201309011300Z"    -- September 01, 2013
DESCRIPTION
    "The first version of this MIB module,
     published as RFC xxxx.
    "
-- RFC-Editor assigns xxxx
::= { experimental xxxx }    -- to be assigned by IANA

--
-- TEXTUAL CONVENTIONS
--

SmfStatus ::= TEXTUAL-CONVENTION
    STATUS        current
    DESCRIPTION
        "An indication of the operability of a SMF
         function or feature.  For example, the status
         of an interface: 'enabled' indicates that
         this interface is performing SMF functions,
         and 'disabled' indicates that it is not.
         Similarly for the status of the device:
         'enabled' indicates that the device has
         enabled the SMF functions on the device and
         'disabled' means that the device and all interfaces
         have disabled all SMF functions."
    SYNTAX        INTEGER {
                        enabled (1),
                        disabled (2)
                    }

--
-- Top-Level Object Identifier Assignments
--

smfMIBNotifications OBJECT IDENTIFIER ::= { smfMIB 0 }
smfMIBObjects        OBJECT IDENTIFIER ::= { smfMIB 1 }
smfMIBConformance   OBJECT IDENTIFIER ::= { smfMIB 2 }

--
-- smfMIBObjects Assignments:
--     smfCapabilitiesGroup - 1
```

```
--      smfConfigurationGroup - 2
--      smfStateGroup         - 3
--      smfPerformanceGroup   - 4
--
--
-- smfCapabilitiesGroup
--
--      This group contains the SMF objects that identify specific
--      capabilities within this device related to SMF functions.
--
smfCapabilitiesGroup OBJECT IDENTIFIER ::= { smfMIBObjects 1 }
--
-- SMF Capabilities Table
--
smfCapabilitiesTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfCapabilitiesEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The smfCapabilitiesTable identifies the
        resident set of SMF Operational Modes and
        RSSA combinations that can run on this
        forwarder."
    REFERENCE
        "See Section 7.2. 'Reduced Relay Set Forwarding',
        Section 8.1.1. 'SMF Message TLV Type', and
        the Appendices A, B and C in
        RFC 6621 - Simplified Multicast Forwarding
        (SMF), Macker, J., May 2012."
    ::= { smfCapabilitiesGroup 1 }

smfCapabilitiesEntry OBJECT-TYPE
    SYNTAX      SmfCapabilitiesEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about a particular operational
        mode and RSSA combination.
        "
    INDEX      { smfCapabilitiesIndex }
    ::= { smfCapabilitiesTable 1 }

SmfCapabilitiesEntry ::= SEQUENCE {
    smfCapabilitiesIndex          Integer32,
```

```

    smfCapabilitiesOpModeID          IANAsmfOpModeIdTC,
    smfCapabilitiesRssaID           IANAsmfRssaIdTC
}

```

```

smfCapabilitiesIndex      OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION

```

"The index for this entry; a unique value, greater than zero, for each combination of a particular operational mode and RSSA algorithm available on this device. It is recommended that values are assigned contiguously starting from 1.

Rows in this table are automatically populated by the entity's management system on initialization.

By default, the agent should support at least the Classical Flooding 'cF' algorithm. All compliant SMF forwarders must support Classical Flooding. Hence, the first entry in this table MUST exist and MUST be defined as:

```

    smfCapabilitiesIndex i '1'
    smfCapabilitiesOpModeID i 'cfOnly(1)'
    smfCapabilitiesRssaID i 'cF(1)'

```

The value for each combination MUST remain constant at least from one re-initialization of the entity's management system to the next re-initialization."

```
 ::= { smfCapabilitiesEntry 1 }
```

```

smfCapabilitiesOpModeID      OBJECT-TYPE
    SYNTAX      IANAsmfOpModeIdTC
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION

```

"This object identifies the particular operational mode for this device."

```
 ::= { smfCapabilitiesEntry 2 }
```

```

smfCapabilitiesRssaID      OBJECT-TYPE
    SYNTAX      IANAsmfRssaIdTC
    MAX-ACCESS  read-only

```

```
STATUS      current
DESCRIPTION
    "This object identifies
     the particular RSSA algorithm in this MIB
     module. Example RSSAs are found in the
     appendix of RFC 6621."
REFERENCE
    "See, e.g., Section 8.1.1. 'SMF Message TLV Type',
     and the Appendices A, B and C in
     RFC 6621 - Simplified Multicast Forwarding
     (SMF), Macker, J., May 2012."
 ::= { smfCapabilitiesEntry 3 }

--
-- smfConfigurationGroup
--
-- This group contains the SMF objects that configure specific
-- options that determine the overall performance and operation
-- of the multicast forwarding process for the router device
-- and its interfaces.
--

smfConfigurationGroup OBJECT IDENTIFIER ::= { smfMIBObjects 2 }

smfCfgAdminStatus OBJECT-TYPE
SYNTAX      SmfStatus
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "The configured status of the SMF process
     on this device. 'enabled(1)' means that
     SMF is configured to run on this device.
     'disabled(2)' mean that the SMF process
     is configured off.

     Prior to SNM functions being performed over
     specific interfaces, this object must first
     be 'enabled'. If this object is 'disabled',
     then no SMF functions are being performed on
     the device and all smfIfAdminStatus objects
     MUST also be set to 'disabled'. When this
     object is changed from 'enabled' to 'disabled'
     by the manager, then all smfIfAdminStatus
     objects MUST also be automatically set to
     'disabled' by the agent.

     The default value for this object SHOULD be
```

'enabled'.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

DEFVAL { enabled }

::= { smfConfigurationGroup 1 }

smfCfgSmfSysUpTime OBJECT-TYPE

SYNTAX TimeTicks

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The time (in hundredths of a second) since the system SMF process was last re-initialized. The SMF process is re-initialized when the value of the 'smfCfgAdminStatus' object transitions to 'enabled' from either a prior value of 'disabled' or upon initialization of this device."

::= { smfConfigurationGroup 2 }

smfCfgRouterIDAddrType OBJECT-TYPE

SYNTAX InetAddressType { ipv4(1), ipv6(2) }

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The address type of the address used for SMF ID of this router as specified in the 'smfCfgRouterID' next.

Only the values ipv4(1) and ipv6(2) are supported.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

DEFVAL { ipv4 }

::= { smfConfigurationGroup 3 }

smfCfgRouterID OBJECT-TYPE

SYNTAX InetAddress (SIZE(4|16))

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The IP address used as the SMF router ID. This can be set by the management station. If not explicitly set, then the device

SHOULD select a routable IP address assigned to this router for use as the 'smfCfgRouterID'.

The smfCfgRouterID is a logical identification that MUST be consistent across interoperable SMF neighborhoods and it is RECOMMENDED to be chosen as the numerically largest address contained in a node's 'Neighbor Address List' as defined in NHDP. A smfCfgRouterID MUST be unique within the scope of the operating MANET network regardless of the method used for selecting it.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See, e.g.,

Appendix Section A.1. 'E-CDS Relay Set Selection Overview' and

Appendix Section C.1. 'MPR-CDS Relay Set Selection Overview'

in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfConfigurationGroup 4 }

smfCfgOperationalMode OBJECT-TYPE
 SYNTAX Integer32 (1..2147483647)
 MAX-ACCESS read-write
 STATUS current
 DESCRIPTION

"The SMF RSS node operational mode and RSSA algorithm combination active on this local forwarder. This object is defined to be equal to the smfCapabilitiesIndex which identifies the specific active operational mode and RSSA.

The default value for this object is '1' which corresponds to:

```
smfCapabilitiesOpModeID i 'cfOnly(1)'  
smfCapabilitiesRssaID i 'cF(1)'
```

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See Section 7.2. 'Reduced Relay Set Forwarding', and the Appendices A, B and C in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { 1 }

::= { smfConfigurationGroup 5 }

smfCfgRssaMember OBJECT-TYPE

SYNTAX INTEGER {
potential(1),
always(2),
never(3)
}

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The RSSA downselects a set of forwarders for multicast forwarding. Sometimes it is useful to force an agent to be included or excluded from the resulting RSS. This object is a switch to allow for this behavior.

The value 'potential(1)' allows the selected RSSA to determine if this agent is included or excluded from the RSS.

The value 'always(2)' forces the selected RSSA include this agent in the RSS.

The value 'never(3)' forces the selected RSSA to exclude this agent from the RSS.

The default setting for this object is 'potential(1)'. Other settings could pose operational risks under certain conditions.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See Section 7. 'Relay Set Selection' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { potential }

```
::= { smfConfigurationGroup 6 }
```

smfCfgIpv4Dpd OBJECT-TYPE
SYNTAX INTEGER {
hashBased(1),
identificationBased(2)
}
MAX-ACCESS read-write
STATUS current
DESCRIPTION
"The current method for IPv4 duplicate packet
detection.

The value 'hashBased(1)' indicates that the
routers duplicate packet detection is based
upon comparing a hash over the packet fields.
This is the default setting for this object.

The value 'identificationBased(2)'
indicates that the duplicate packet
detection relies upon header information
in the multicast packets to identify
previously received packets.

This object is persistent and when written
the entity SHOULD save the change to
non-volatile storage."

REFERENCE
"See Section 6.2. 'IPv4 Duplicate Packet
Detection' in RFC 6621 - Simplified
Multicast Forwarding (SMF), Macker, J.,
May 2012."

DEFVAL { hashBased }

```
::= { smfConfigurationGroup 7 }
```

smfCfgIpv6Dpd OBJECT-TYPE
SYNTAX INTEGER {
hashBased(1),
identificationBased(2)
}
MAX-ACCESS read-write
STATUS current
DESCRIPTION
"The current method for IPv6 duplicate packet
detection.

The values indicate the type of method used
for duplicate packet detection as described

the previous description for the object
'smfCfgIpv4Dpd'.

The default value for this object is
'hashBased(1)'.

This object is persistent and when written
the entity SHOULD save the change to
non-volatile storage."

REFERENCE

"See Section 6.1. 'IPv6 Duplicate Packet
Detection' in RFC 6621 - Simplified
Multicast Forwarding (SMF), Macker, J.,
May 2012."

DEFVAL { hashBased }

::= { smfConfigurationGroup 8 }

smfCfgMaxPktLifetime OBJECT-TYPE

SYNTAX Integer32 (0..65535)

UNITS "Seconds"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The estimate of the network packet
traversal time.

This object is persistent and when written
the entity SHOULD save the change to
non-volatile storage."

REFERENCE

"See Section 6. 'SMF Duplicate Packet
Detection' in RFC 6621 - Simplified
Multicast Forwarding (SMF), Macker, J.,
May 2012."

DEFVAL { 60 }

::= { smfConfigurationGroup 9 }

smfCfgDpdEntryMaxLifetime OBJECT-TYPE

SYNTAX Integer32 (0..65525)

UNITS "Seconds"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The maximum lifetime of a cached DPD
record in the local device storage.

If the memory is running low prior to the
MaxLifetimes being exceeded, the local SMF

devices should purge the oldest records first.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See Section 6. 'SMF Duplicate Packet Detection' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { 600 }

::= { smfConfigurationGroup 10 }

--

-- Configuration of messages to be included in
 -- NHDP message exchanges in support of SMF
 -- operations.

--

smfCfgNhdpRssaMesgTLVIncluded OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether the associated NHDP messages include the RSSA Message TLV, or not. This is an optional SMF operational setting. The value 'true(1)' indicates that this TLV is included; the value 'false(2)' indicates that it is not included.

It is RECOMMENDED that the RSSA Message TLV be included in the NHDP messages.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See Section 8.1.1. 'SMF Message TLV Type' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { true }

::= { smfConfigurationGroup 11 }

smfCfgNhdpRssaAddrBlockTLVIncluded OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current
DESCRIPTION

"Indicates whether the associated NHDP messages include the RSSA Address Block TLV, or not. This is an optional SMF operational setting. The value 'true(1)' indicates that this TLV is included; the value 'false(2)' indicates that it is not included.

The smfCfgNhdpRssaAddrBlockTLVIncluded is optional in all cases as it depends on the existence of an address block which may not be present. If this SMF device is configured with NHDP, then this object SHOULD be set to 'true(1)'.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See Section 8.1.2. 'SMF Address Block TLV Type' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

DEFVAL { true }

::= { smfConfigurationGroup 12 }

--

-- Table identifying configured multicast addresses to be forwarded.

--

smfCfgAddrForwardingTable OBJECT-TYPE

SYNTAX SEQUENCE OF SmfCfgAddrForwardingEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"The (conceptual) table containing information on multicast multicast addresses which are to be forwarded by the SMF process. This table represents an IP filters table for forwarding (or not) packets based upon their IP multicast address.

The SMF process can be configured to forward only those multicast addresses found within the smfCfgAddrForwardingTable. As such, addresses which are to be forwarded by the SMF process MUST be found within the address ranges configured within this table, unless this table is empty.

Each row is associated with a range of multicast addresses, and ranges for different rows must be disjoint. Different rows MAY share a common smfCfgAddrForwardingGroupName to administratively associate different rows.

The objects in this table are persistent and when written the entity SHOULD save the change to non-volatile storage."

REFERENCE

"See Section 9.1. 'Forwarded Multicast Groups' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

```
::= { smfConfigurationGroup 13 }
```

```
smfCfgAddrForwardingEntry OBJECT-TYPE
```

```
SYNTAX      SmfCfgAddrForwardingEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS      current
```

```
DESCRIPTION
```

"An entry (conceptual row) containing the information on a particular multicast scope."

```
INDEX { smfCfgAddrForwardingIndex }
```

```
::= { smfCfgAddrForwardingTable 1 }
```

```
SmfCfgAddrForwardingEntry ::= SEQUENCE {
```

```
    smfCfgAddrForwardingIndex      Integer32,
```

```
    smfCfgAddrForwardingGroupName  SnmpAdminString,
```

```
    smfCfgAddrForwardingAddrType   InetAddressType,
```

```
    smfCfgAddrForwardingAddress    InetAddress,
```

```
    smfCfgAddrForwardingAddrPrefixLength  InetAddressPrefixLength,
```

```
    smfCfgAddrForwardingStatus     RowStatus
```

```
}
```

```
smfCfgAddrForwardingIndex      OBJECT-TYPE
```

```
SYNTAX      Integer32 (1..2147483647)
```

```
MAX-ACCESS not-accessible
```

```
STATUS      current
```

```
DESCRIPTION
```

"This object identifies an unique entry for a forwarding group. The index for this entry is a unique value, greater than zero, for each row. It is recommended that values are assigned contiguously starting from 1.

The value for each row index MUST remain constant from one re-initialization

```
        of the entity's management system to the
        next re-initialization."
 ::= { smfCfgAddrForwardingEntry 1 }

smfCfgAddrForwardingGroupName OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "This object identifies a group name for a set of
        row entries in order to administratively associate
        a set of address ranges.

        If there is no group name or this object is
        otherwise not applicable, then this object contains
        a zero-length string.

        This object is persistent and when written
        the entity SHOULD save the change to
        non-volatile storage."
 ::= { smfCfgAddrForwardingEntry 2 }

smfCfgAddrForwardingAddrType OBJECT-TYPE
    SYNTAX      InetAddress { ipv4(1), ipv6(2) }
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "The type of the addresses in the multicast
        forwarding ranges identified by this table.

        Only the values ipv4(1) and ipv6(2) are
        supported.

        This object is persistent and when written
        the entity SHOULD save the change to
        non-volatile storage."
 ::= { smfCfgAddrForwardingEntry 3 }

smfCfgAddrForwardingAddress OBJECT-TYPE
    SYNTAX      InetAddress (SIZE(4|16))
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "The multicast group address which, when
        combined with smfCfgAddrForwardingAddrPrefixLength,
        gives the group prefix for this forwarding range.
        The InetAddressType is given by
        smfCfgAddrForwardingAddrType."
```

This address object is only significant up to smfCfgAddrForwardingAddrPrefixLength bits. The remaining address bits are set to zero. This is especially important for this index field, Any non-zero bits would signify an entirely different entry.

Legal values correspond to the subset of address families for which multicast address allocation is supported.

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

```
::= { smfCfgAddrForwardingEntry 4 }
```

```
smfCfgAddrForwardingAddrPrefixLength OBJECT-TYPE
```

```
SYNTAX      InetAddressPrefixLength
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

```
"The length in bits of the mask which, when combined with smfCfgAddrForwardingAddress, gives the group prefix for this forwarding range.
```

This object is persistent and when written the entity SHOULD save the change to non-volatile storage."

```
::= { smfCfgAddrForwardingEntry 5 }
```

```
smfCfgAddrForwardingStatus OBJECT-TYPE
```

```
SYNTAX      RowStatus
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

```
"The status of this row, by which new entries may be created, or old entries deleted from this table."
```

```
::= { smfCfgAddrForwardingEntry 6 }
```

```
--
```

```
-- SMF Interfaces Configuration Table
```

```
--
```

```
smfCfgInterfaceTable OBJECT-TYPE
```

```
SYNTAX      SEQUENCE OF SmfCfgInterfaceEntry
```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION

"The SMF Interface Table describes the SMF interfaces that are participating in the SMF packet forwarding process. The ifIndex is from the interfaces group defined in the Interfaces Group MIB module (RFC 2863). As such, this table 'sparse augments' the ifTable specifically when SMF is to be configured to operate over this interface.

A conceptual row in this table exists if and only if either a manager has explicitly created the row or there is an interface on the managed device that supports and runs SMF.

The manager can create a row by setting rowStatus to 'createAndGo' or 'createAndWait'. Row objects having associated DEFVAL clauses are automatically defined by the agent with these values during row creation, unless the manager explicitly defines these object values during the row creation.

If the corresponding entry with ifIndex value is deleted from the Interface Table, then the entry in this table is automatically deleted and SMF is disabled on this interface, and all configuration and state information related to this interface is to be removed from memory.

If the value of the smfCfgAdminStatus object is changed from 'enabled' to 'disabled', then all rows in this table are to be deleted and all configuration and state information related to this interface is to be removed from memory."

REFERENCE

"RFC 2863 - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholz, June 2000."

::= { smfConfigurationGroup 14 }

smfCfgInterfaceEntry OBJECT-TYPE

SYNTAX SmfCfgInterfaceEntry
MAX-ACCESS not-accessible
STATUS current

DESCRIPTION

"The SMF interface entry describes one SMF interface as indexed by its ifIndex.

The objects in this table are persistent and when written the device SHOULD save the change to non-volatile storage. For further information on the storage behavior for these objects, refer to the description for the smfCfgIfRowStatus object."

```
INDEX { smfCfgIfIndex }
 ::= { smfCfgInterfaceTable 1 }
```

```
SmfCfgInterfaceEntry ::=
```

```
SEQUENCE {
    smfCfgIfIndex      InterfaceIndexOrZero,
    smfCfgIfName       SnmpAdminString,
    smfCfgIfAdminStatus SmfStatus,
    smfCfgIfSmfUpTime  TimeTicks,
    smfCfgIfRowStatus  RowStatus
}
```

```
smfCfgIfIndex OBJECT-TYPE
```

```
SYNTAX      InterfaceIndexOrZero
```

```
MAX-ACCESS not-accessible
```

```
STATUS      current
```

DESCRIPTION

"The ifIndex for this SMF interface. This value MUST correspond to an ifIndex referring to a valid entry in The Interfaces Table. If the manager attempts to create a row for which the ifIndex does not exist on the local device, then the agent SHOULD issue a return value of 'inconsistentValue' and the operation SHOULD fail."

REFERENCE

"RFC 2863 - The Interfaces Group MIB, McCloghrie, K., and F. Kastenholz, June 2000."

```
::= { smfCfgInterfaceEntry 1 }
```

```
smfCfgIfName OBJECT-TYPE
```

```
SYNTAX      SnmpAdminString
```

```
MAX-ACCESS read-only
```

```
STATUS      current
```

DESCRIPTION

"The textual name of the interface. The value of this object SHOULD be the name of the interface as assigned by the local device. This can be a text-name, such as 'le0'

or a simple port number, such as '1',
depending on the interface-naming syntax of the device.

If there is no local name or this object is otherwise not applicable, then this object contains a zero-length string."
 ::= { smfCfgInterfaceEntry 2 }

smfCfgIfAdminStatus OBJECT-TYPE

SYNTAX SmfStatus
MAX-ACCESS read-create
STATUS current
DESCRIPTION

"The SMF interface's administrative status.
The value 'enabled' denotes that the interface
is running the SMF forwarding process.
The value 'disabled' denotes that the interface is
currently external to the SMF forwarding process.

The default value for this object is 'enabled(1)'.

This object SHOULD be persistent and when
written the device SHOULD save the change to
non-volatile storage."

DEFVAL { enabled }
 ::= { smfCfgInterfaceEntry 3 }

smfCfgIfSmfUpTime OBJECT-TYPE

SYNTAX TimeTicks
MAX-ACCESS read-only
STATUS current
DESCRIPTION

"The time (in hundredths of a second) since
this interface SMF process was last
re-initialized. The interface SMF process
is re-initialized when the corresponding
'smfCfgIfRowStatus' object transits to
the active(1) state."

::= { smfCfgInterfaceEntry 4 }

smfCfgIfRowStatus OBJECT-TYPE

SYNTAX RowStatus
MAX-ACCESS read-create
STATUS current
DESCRIPTION

"This object permits management of the table
by facilitating actions such as row creation,
construction, and destruction. The value of
this object has no effect on whether other

objects in this conceptual row can be modified.

An entry may not exist in the active(1) state unless all objects in the entry have a defined appropriate value. For objects with DEFVAL clauses, the management station does not need to specify the value of this object in order for the row to transit to the active(1) state; the default value for this object is used. For objects that do not have DEFVAL clauses, then the network manager MUST specify the value of this object prior to this row transitioning to the active(1) state.

When this object transitions to active(1), all objects in this row SHOULD be written to non-volatile (stable) storage. Read-create objects in this row MAY be modified. When an object in a row with smfCfgIfRowStatus of active(1) is changed, then the updated value MUST be reflected in SMF and this new object value MUST be written to non-volatile storage.

If this object is not equal to active(1), all associated entries in the smfPerfIpv4InterfacePerfTable and the smfPerfIpv6InterfacePerfTable MUST be deleted."

```
::= { smfCfgInterfaceEntry 5 }
```

```
--
```

```
-- smfStateGroup
```

```
--
```

```
-- Contains information describing the current state of the SMF
-- process such as the current inclusion in the RS or not.
```

```
--
```

```
smfStateGroup OBJECT IDENTIFIER ::= { smfMIBObjects 3 }
```

```
smfStateNodeRsStatusIncluded OBJECT-TYPE
```

```
SYNTAX TruthValue
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The current status of the SMF node in the context of
the MANETs relay set. A value of 'true(1)' indicates
that the node is currently part of the MANET Relay
Set. A value of 'false(2)' indicates that the node
is currently not part of the MANET Relay Set."
```

```
REFERENCE
```

```
"See Section 7. 'Relay Set Selection' in
```

```

        RFC 6621 - Simplified Multicast Forwarding
        (SMF), Macker, J., May 2012."
 ::= { smfStateGroup 1 }

smfStateDpdMemoryOverflow OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "DPD Records"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of DPD records that had to be flushed to
        prevent memory overruns for caching of these records.
        The number of records to be flushed upon a buffer
        overflow is an implementation specific decision.

        There is the potential for a counter discontinuity
        in this object if the system SMF process had been
        disabled and later enabled.  In order to check for
        the occurrence of such a discontinuity when monitoring
        this counter object, it is recommended that the
        smfCfgSmfSysUpTime object also be monitored."
    REFERENCE
        "See Section 6. 'SMF Duplicate Packet
        Detection' in RFC 6621 - Simplified
        Multicast Forwarding (SMF), Macker, J.,
        May 2012."
 ::= { smfStateGroup 2 }

--
-- SMF Neighbor Table
--

smfStateNeighborTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfStateNeighborEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The SMF StateNeighborTable describes the
        current one-hop neighbor nodes, their address
        and SMF RSSA and the interface on which
        they can be reached."
    REFERENCE
        "See Section 7. 'SMF Neighborhood Discovery' and
        Section 8.1. 'SMF Relay Algorithm TLV
        Types' in RFC 6621 - Simplified Multicast
        Forwarding (SMF), Macker, J., May 2012."
 ::= { smfStateGroup 3 }
```

```

smfStateNeighborEntry OBJECT-TYPE
    SYNTAX      SmfStateNeighborEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The SMF Neighbor Table contains the
         set of one-hop neighbors, the interface
         they are reachable on and the SMF RSSA
         they are currently running."
    INDEX { smfStateNeighborIpAddressType,
            smfStateNeighborIpAddress,
            smfStateNeighborPrefixLen }
 ::= { smfStateNeighborTable 1 }

SmfStateNeighborEntry ::=
    SEQUENCE {
        smfStateNeighborIpAddressType      InetAddressType,
        smfStateNeighborIpAddress          InetAddress,
        smfStateNeighborPrefixLen          InetAddressPrefixLength,
        smfStateNeighborRSSA                IANASmfRssaIdTC,
        smfStateNeighborNextHopInterface   InterfaceIndexOrZero
    }

smfStateNeighborIpAddressType OBJECT-TYPE
    SYNTAX      InetAddressType { ipv4(1), ipv6(2) }
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The one-hop neighbor IP address type.

         Only the values 'ipv4(1)' and
         'ipv6(2)' are supported."
 ::= { smfStateNeighborEntry 1 }

smfStateNeighborIpAddress OBJECT-TYPE
    SYNTAX      InetAddress (SIZE(4|16))
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The one-hop neighbor Inet IPv4 or IPv6
         address.

         Only IPv4 and IPv6 addresses
         are supported."
 ::= { smfStateNeighborEntry 2 }

smfStateNeighborPrefixLen OBJECT-TYPE
    SYNTAX      InetAddressPrefixLength

```

```

    UNITS          "bits"
    MAX-ACCESS     not-accessible
    STATUS         current
    DESCRIPTION
        "The prefix length. This is a decimal value that
         indicates the number of contiguous, higher-order
         bits of the address that make up the network
         portion of the address."
 ::= { smfStateNeighborEntry 3 }

smfStateNeighborRSSA OBJECT-TYPE
    SYNTAX         IANAsmfRssaIdTC
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "The current RSSA running on the neighbor."
 ::= { smfStateNeighborEntry 4 }

smfStateNeighborNextHopInterface OBJECT-TYPE
    SYNTAX         InterfaceIndexOrZero
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "The interface ifIndex over which the
         neighbor is reachable in one-hop."
 ::= { smfStateNeighborEntry 6 }

--
-- SMF Performance Group
--
-- Contains objects which help to characterize the
-- performance of the SMF RSSA process, such as statistics
-- counters. There are two types of SMF RSSA statistics:
-- global counters and per interface counters.
--

smfPerformanceGroup OBJECT IDENTIFIER ::= { smfMIBObjects 4 }

smfPerfGobalGroup OBJECT IDENTIFIER ::= { smfPerformanceGroup 1 }

--
-- IPv4 packet counters
--

smfPerfIpv4MultiPktsRecvTotal OBJECT-TYPE
    SYNTAX         Counter32
    UNITS          "Packets"

```

```
MAX-ACCESS read-only
STATUS      current
DESCRIPTION
    "A counter of the total number of
    multicast IPv4 packets received by the
    device and delivered to the SMF process.

    There is the potential for a counter discontinuity
    in this object if the system SMF process had been
    disabled and later enabled. In order to check for
    the occurrence of such a discontinuity when monitoring
    this counter object, it is recommended that the
    smfCfgSmfSysUpTime object also be monitored."
 ::= { smfPerfGobalGroup 1 }

smfPerfIpv4MultiPktsForwardedTotal OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "A counter of the total number of
    multicast IPv4 packets forwarded by the
    device.

    There is the potential for a counter discontinuity
    in this object if the system SMF process had been
    disabled and later enabled. In order to check for
    the occurrence of such a discontinuity when monitoring
    this counter object, it is recommended that the
    smfCfgSmfSysUpTime object also be monitored."
 ::= { smfPerfGobalGroup 2 }

smfPerfIpv4DuplMultiPktsDetectedTotal OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "A counter of the total number of duplicate
    multicast IPv4 packets detected by the
    device.

    There is the potential for a counter discontinuity
    in this object if the system SMF process had been
    disabled and later enabled. In order to check for
    the occurrence of such a discontinuity when monitoring
    this counter object, it is recommended that the
```

smfCfgSmfSysUpTime object also be monitored."
REFERENCE
"See Section 6.2. 'IPv4 Duplicate Packet
Detection' in RFC 6621 - Simplified Multicast
Forwarding (SMF), Macker, J., May 2012."
 ::= { smfPerfGobalGroup 3 }

smfPerfIpv4DroppedMultiPktsTTLExceededTotal OBJECT-TYPE
SYNTAX Counter32
UNITS "Packets"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"A counter of the total number of dropped
multicast IPv4 packets by the
device due to TTL exceeded.

There is the potential for a counter discontinuity
in this object if the system SMF process had been
disabled and later enabled. In order to check for
the occurrence of such a discontinuity when monitoring
this counter object, it is recommended that the
smfCfgSmfSysUpTime object also be monitored."
REFERENCE
"See Section 5. 'SMF Packet Processing and
Forwarding' in RFC 6621 - Simplified
Multicast Forwarding (SMF), Macker, J.,
May 2012."
 ::= { smfPerfGobalGroup 4 }

smfPerfIpv4TTLLargerThanPreviousTotal OBJECT-TYPE
SYNTAX Counter32
UNITS "Packets"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"A counter of the total number of IPv4 packets
recieved which have a TTL larger than that
of a previously received identical packet.

There is the potential for a counter discontinuity
in this object if the system SMF process had been
disabled and later enabled. In order to check for
the occurrence of such a discontinuity when monitoring
this counter object, it is recommended that the
smfCfgSmfSysUpTime object also be monitored."
REFERENCE
"See Section 5. 'SMF Packet Processing and

```
        Forwarding' in RFC 6621 - Simplified Multicast
        Forwarding (SMF), Macker, J., May 2012."
 ::= { smfPerfGobalGroup 5 }

--
-- IPv6 packet counters
--

smfPerfIpv6MultiPktsRecvTotal  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS        "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of
        multicast IPv6 packets received by the
        device and delivered to the SMF process.

        There is the potential for a counter discontinuity
        in this object if the system SMF process had been
        disabled and later enabled.  In order to check for
        the occurrence of such a discontinuity when monitoring
        this counter object, it is recommended that the
        smfCfgSmfSysUpTime object also be monitored."
 ::= { smfPerfGobalGroup 6 }

smfPerfIpv6MultiPktsForwardedTotal  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS        "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the total number of
        multicast IPv6 packets forwarded by the
        device.

        There is the potential for a counter discontinuity
        in this object if the system SMF process had been
        disabled and later enabled.  In order to check for
        the occurrence of such a discontinuity when monitoring
        this counter object, it is recommended that the
        smfCfgSmfSysUpTime object also be monitored."
 ::= { smfPerfGobalGroup 7 }

smfPerfIpv6DuplMultiPktsDetectedTotal  OBJECT-TYPE
    SYNTAX      Counter32
    UNITS        "Packets"
    MAX-ACCESS  read-only
```

STATUS current

DESCRIPTION

"A counter of the total number of duplicate multicast IPv6 packets detected by the device.

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled. In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgSmfSysUpTime object also be monitored."

REFERENCE

"See Section 6.1. 'IPv6 Duplicate Packet Detection' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfPerfGobalGroup 8 }

smfPerfIpv6DroppedMultiPktsTTLExceededTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of dropped multicast IPv6 packets by the device due to TTL exceeded.

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled. In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgSmfSysUpTime object also be monitored."

REFERENCE

"See Section 5. 'SMF Packet Processing and Forwarding' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfPerfGobalGroup 9 }

smfPerfIpv6TTLargerThanPreviousTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of IPv6 packets

received which have a TTL larger than that of a previously received identical packet.

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled. In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgSmfSysUpTime object also be monitored."

REFERENCE

"See Section 5. 'SMF Packet Processing and Forwarding' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfPerfGobalGroup 10 }

smfPerfIpv6HAVAssistsReqdTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of IPv6 packets received which required the HAV assist for DPD.

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled. In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgSmfSysUpTime object also be monitored."

REFERENCE

"See Section 6.1.1. 'IPv6 SMF_DPD Option Header' in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

::= { smfPerfGobalGroup 11 }

smfPerfIpv6DpdHeaderInsertionsTotal OBJECT-TYPE

SYNTAX Counter32

UNITS "Packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A counter of the total number of IPv6 packets received which the device inserted the DPD header option.

There is the potential for a counter discontinuity in this object if the system SMF process had been

```

disabled and later enabled. In order to check for
the occurrence of such a discontinuity when monitoring
this counter object, it is recommended that the
smfCfgSmfSysUpTime object also be monitored."
REFERENCE
  "See Section 6.1.2. 'IPv6 Identification-Based
  DPD' in RFC 6621 - Simplified Multicast
  Forwarding (SMF), Macker, J., May 2012."
 ::= { smfPerfGobalGroup 12 }

--
-- Per SMF Interface Performance Table
--

smfPerfInterfaceGroup OBJECT IDENTIFIER ::= { smfPerformanceGroup 2 }

smfPerfIpv4InterfacePerfTable OBJECT-TYPE
  SYNTAX      SEQUENCE OF SmfPerfIpv4InterfacePerfEntry
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "The SMF Interface Performance Table
    describes the SMF counters per
    interface."
 ::= { smfPerfInterfaceGroup 1 }

smfPerfIpv4InterfacePerfEntry OBJECT-TYPE
  SYNTAX      SmfPerfIpv4InterfacePerfEntry
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "The SMF Interface Performance entry
    describes the statistics for a particular
    node interface."
  INDEX { smfCfgIfIndex }
 ::= { smfPerfIpv4InterfacePerfTable 1 }

SmfPerfIpv4InterfacePerfEntry ::=
  SEQUENCE {
    smfPerfIpv4MultiPktsRecvPerIf      Counter32,
    smfPerfIpv4MultiPktsForwardedPerIf Counter32,
    smfPerfIpv4DuplMultiPktsDetectedPerIf Counter32,
    smfPerfIpv4DroppedMultiPktsTTLExceededPerIf Counter32,
    smfPerfIpv4TTLLargerThanPreviousPerIf Counter32
  }

smfPerfIpv4MultiPktsRecvPerIf OBJECT-TYPE

```

```
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A counter of the number of multicast IP
  packets received by the SMF process on
  this device on this interface.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface. In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the `smfCfgrIfSmfUpTime` object also be monitored."

```
::= { smfPerfIpv4InterfacePerfEntry 1 }
```

```
smfPerfIpv4MultiPktsForwardedPerIf OBJECT-TYPE
```

```
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A counter of the number of
  multicast IP packets forwarded by the
  SMF process on this device
  on this interface.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface. In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the `smfCfgrIfSmfUpTime` object also be monitored."

```
::= { smfPerfIpv4InterfacePerfEntry 2 }
```

```
smfPerfIpv4DuplMultiPktsDetectedPerIf OBJECT-TYPE
```

```
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A counter of the number of duplicate
  multicast IP packets detected by the
  SMF process on this device
  on this interface.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface.

In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgIfSmfUpTime object also be monitored."

```
::= { smfPerfIpv4InterfacePerfEntry 3 }
```

```
smfPerfIpv4DroppedMultiPktsTTLExceededPerIf OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"A counter of the total number of dropped
multicast IPv4 packets by the SMF process
on this device on this interface
due to TTL exceeded.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface.

In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgIfSmfUpTime object also be monitored."

```
::= { smfPerfIpv4InterfacePerfEntry 4 }
```

```
smfPerfIpv4TTLLargerThanPreviousPerIf OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"A counter of the total number of IPv4 packets
received by the SMF process on this device
on this interface which have a TTL larger than
that of a previously received identical packet.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface.

In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgIfSmfUpTime object also be monitored."

```
::= { smfPerfIpv4InterfacePerfEntry 5 }
```

```

smfPerfIpv6InterfacePerfTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF SmfPerfIpv6InterfacePerfEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The SMF Interface Performance Table
         describes the SMF counters per
         interface."
 ::= { smfPerfInterfaceGroup 2 }

smfPerfIpv6InterfacePerfEntry OBJECT-TYPE
    SYNTAX      SmfPerfIpv6InterfacePerfEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The SMF Interface Performance entry
         describes the counters for a particular
         node interface."
    INDEX { smfCfGIfIndex }
 ::= { smfPerfIpv6InterfacePerfTable 1 }

SmfPerfIpv6InterfacePerfEntry ::=
    SEQUENCE {
        smfPerfIpv6MultiPktsRecvPerIf          Counter32,
        smfPerfIpv6MultiPktsForwardedPerIf     Counter32,
        smfPerfIpv6DuplMultiPktsDetectedPerIf  Counter32,
        smfPerfIpv6DroppedMultiPktsTTLExceededPerIf Counter32,
        smfPerfIpv6TTLLargerThanPreviousPerIf Counter32,
        smfPerfIpv6HAVAssistsReqdPerIf         Counter32,
        smfPerfIpv6DpdHeaderInsertionsPerIf    Counter32
    }

smfPerfIpv6MultiPktsRecvPerIf OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the number of
         multicast IP packets received by the
         SMF process on this device
         on this interface.

         There is the potential for a counter discontinuity
         in this object if the system SMF process had been
         disabled and later enabled on this interface.
         In order to check for the occurrence of such a
         discontinuity when monitoring this counter object,
```

```
        it is recommended that the smfCfgIfSmfUpTime
        object also be monitored."
 ::= { smfPerfIpv6InterfacePerfEntry 1 }

smfPerfIpv6MultiPktsForwardedPerIf OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the number of
        multicast IP packets forwarded by the
        SMF process on this device
        on this interface.

        There is the potential for a counter discontinuity
        in this object if the system SMF process had been
        disabled and later enabled on this interface.
        In order to check for the occurrence of such a
        discontinuity when monitoring this counter object,
        it is recommended that the smfCfgIfSmfUpTime
        object also be monitored."
 ::= { smfPerfIpv6InterfacePerfEntry 2 }

smfPerfIpv6DuplMultiPktsDetectedPerIf OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A counter of the number of duplicate
        multicast IP packets detected by the
        SMF process on this device
        on this interface.

        There is the potential for a counter discontinuity
        in this object if the system SMF process had been
        disabled and later enabled on this interface.
        In order to check for the occurrence of such a
        discontinuity when monitoring this counter object,
        it is recommended that the smfCfgIfSmfUpTime
        object also be monitored."
 ::= { smfPerfIpv6InterfacePerfEntry 3 }

smfPerfIpv6DroppedMultiPktsTTLExceededPerIf OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "Packets"
    MAX-ACCESS  read-only
```

```
STATUS      current
DESCRIPTION
  "A counter of the number of dropped
  multicast IP packets by the
  SMF process on this device
  on this interface due to TTL
  exceeded.

  There is the potential for a counter discontinuity
  in this object if the system SMF process had been
  disabled and later enabled on this interface.
  In order to check for the occurrence of such a
  discontinuity when monitoring this counter object,
  it is recommended that the smfCfgIfSmfUpTime
  object also be monitored."
 ::= { smfPerfIpv6InterfacePerfEntry 4 }

smfPerfIpv6TTLLargerThanPreviousPerIf OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A counter of the total number of IPv6 packets
  received which have a TTL larger than that
  of a previously received identical packet
  by the SMF process on this device on this
  interface.

  There is the potential for a counter discontinuity
  in this object if the system SMF process had been
  disabled and later enabled on this interface.
  In order to check for the occurrence of such a
  discontinuity when monitoring this counter object,
  it is recommended that the smfCfgIfSmfUpTime
  object also be monitored."
 ::= { smfPerfIpv6InterfacePerfEntry 5 }

smfPerfIpv6HAVAssistsReqdPerIf OBJECT-TYPE
SYNTAX      Counter32
UNITS       "Packets"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A counter of the total number of IPv6 packets
  received by the SMF process on this device
  on this interface which required the
  HAV assist for DPD.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface.

In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgIfSmfUpTime object also be monitored."

```
::= { smfPerfIpv6InterfacePerfEntry 6 }
```

```
smfPerfIpv6DpdHeaderInsertionsPerIf OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
UNITS "Packets"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"A counter of the total number of IPv6 packets received by the SMF process on this device on this interface which the device inserted the DPD header option.
```

There is the potential for a counter discontinuity in this object if the system SMF process had been disabled and later enabled on this interface.

In order to check for the occurrence of such a discontinuity when monitoring this counter object, it is recommended that the smfCfgIfSmfUpTime object also be monitored."

```
::= { smfPerfIpv6InterfacePerfEntry 7 }
```

```
--
```

```
-- Notifications
```

```
--
```

```
smfMIBNotifObjects OBJECT IDENTIFIER ::= { smfMIBNotifications 0 }
```

```
smfMIBNotifControl OBJECT IDENTIFIER ::= { smfMIBNotifications 1 }
```

```
-- smfMIBNotifObjects
```

```
smfNotifAdminStatusChange NOTIFICATION-TYPE
```

```
OBJECTS { smfCfgRouterIDAddrType, -- The originator of
-- the notification.
```

```
smfCfgRouterID, -- The originator of
-- the notification.
```

```
smfCfgAdminStatus -- The new status of the
-- SMF process.
```

```

    }
    STATUS          current
    DESCRIPTION
        "smfCfgAdminStatusChange is a notification sent when a
        the 'smfCfgAdminStatus' object changes."
    ::= { smfMIBNotifObjects 1 }

smfNotifConfiguredOpModeChange NOTIFICATION-TYPE
    OBJECTS { smfCfgRouterIDAddrType, -- The originator of
              smfCfgRouterID,         -- the notification.
              smfCfgOperationalMode  -- The originator of
              -- the notification.
              smfCfgOperationalMode  -- The new Operations
              -- Mode of the SMF
              -- process.
    }
    STATUS          current
    DESCRIPTION
        "smfNotifConfiguredOpModeChange is a notification
        sent when the 'smfCfgOperationalMode' object
        changes."
    ::= { smfMIBNotifObjects 2 }

smfNotifIfAdminStatusChange NOTIFICATION-TYPE
    OBJECTS { smfCfgRouterIDAddrType, -- The originator of
              smfCfgRouterID,         -- the notification.
              smfCfgIfName,          -- The originator of
              -- the notification.
              smfCfgIfName,          -- The interface whose
              -- status has changed.
              smfCfgIfAdminStatus    -- The new status of the
              -- SMF interface.
    }
    STATUS          current
    DESCRIPTION
        "smfCfgIfAdminStatusChange is a notification sent when a
        the 'smfCfgIfAdminStatus' object changes."
    ::= { smfMIBNotifObjects 3 }

smfNotifDpdMemoryOverflowEvent NOTIFICATION-TYPE
    OBJECTS { smfCfgRouterIDAddrType, -- The originator of
              smfCfgRouterID,         -- the notification.
              smfCfgRouterID,         -- The originator of
              -- the notification.
              smfStateDpdMemoryOverflow -- The counter of
              -- the overflows.
    }
    STATUS          current

```

DESCRIPTION

"smfNotifDpdMemoryOverflowEvents is sent when the number of memory overflow events exceeds the the 'smfNotifDpdMemoryOverflowThreshold' within the previous number of seconds defined by the 'smfNotifDpdMemoryOverflowWindow'."

```
::= { smfMIBNotifObjects 4 }
```

```
-- smfMIBNotifControl
```

```
smfNotifDpdMemoryOverflowThreshold OBJECT-TYPE
```

```
SYNTAX      Integer32 (0..255)
```

```
UNITS       "Events"
```

```
MAX-ACCESS  read-write
```

```
STATUS      current
```

```
DESCRIPTION
```

"A threshold value for the 'smfNotifDpdmemoryOverflowEvents' object. If the number of occurrences exceeds this threshold within the previous number of seconds 'smfNotifDpdMemoryOverflowWindow', then the 'smfNotifDpdMemoryOverflowEvent' notification is sent.

The default value for this object is '1'."

```
DEFVAL { 1 }
```

```
::= { smfMIBNotifControl 1 }
```

```
smfNotifDpdMemoryOverflowWindow OBJECT-TYPE
```

```
SYNTAX      TimeTicks
```

```
MAX-ACCESS  read-write
```

```
STATUS      current
```

```
DESCRIPTION
```

"A time window value for the 'smfNotifDpdmemoryOverflowEvents' object. If the number of occurrences exceeds the 'smfNotifDpdMemoryOverflowThreshold' within the previous number of seconds 'smfNotifDpdMemoryOverflowWindow', then the 'smfNotifDpdMemoryOverflowEvent' notification is sent.

The default value for this object is '1'."

```
DEFVAL { 1 }
```

```
 ::= { smfMIBNotifControl 2 }

--
-- Compliance Statements
--

smfCompliances OBJECT IDENTIFIER ::= { smfMIBConformance 1 }
smfMIBGroups OBJECT IDENTIFIER ::= { smfMIBConformance 2 }

smfBasicCompliance MODULE-COMPLIANCE
    STATUS current
    DESCRIPTION "The basic implementation requirements for
                managed network entities that implement
                the SMF RSSA process."
    MODULE -- this module
    MANDATORY-GROUPS { smfCapabObjectsGroup,
                       smfConfigObjectsGroup }
 ::= { smfCompliances 1 }

smfFullCompliance MODULE-COMPLIANCE
    STATUS current
    DESCRIPTION "The full implementation requirements for
                managed network entities that implement
                the SMF RSSA process."
    MODULE -- this module
    MANDATORY-GROUPS { smfCapabObjectsGroup,
                       smfConfigObjectsGroup,
                       smfStateObjectsGroup,
                       smfPerfObjectsGroup,
                       smfNotifObjectsGroup,
                       smfNotificationsGroup
                       }
 ::= { smfCompliances 2 }

--
-- Units of Conformance
--

smfCapabObjectsGroup OBJECT-GROUP
    OBJECTS {
        smfCapabilitiesOpModeID,
        smfCapabilitiesRssaID
    }
    STATUS current
    DESCRIPTION
        "Set of SMF configuration objects implemented
        in this module."
```

```
::= { smfMIBGroups 1 }

smfConfigObjectsGroup OBJECT-GROUP
  OBJECTS {
    smfCfgAdminStatus,
    smfCfgSmfSysUpTime,
    smfCfgRouterIDAddrType,
    smfCfgRouterID,
    smfCfgOperationalMode,
    smfCfgRssaMember,
    smfCfgIpv4Dpd,
    smfCfgIpv6Dpd,
    smfCfgMaxPktLifetime,
    smfCfgDpdEntryMaxLifetime,
    smfCfgNhdpRssaMesgTLVIncluded,
    smfCfgNhdpRssaAddrBlockTLVIncluded,

    smfCfgAddrForwardingGroupName,
    smfCfgAddrForwardingAddrType,
    smfCfgAddrForwardingAddress,
    smfCfgAddrForwardingAddrPrefixLength,
    smfCfgAddrForwardingStatus,

    smfCfgIfName,
    smfCfgIfAdminStatus,
    smfCfgIfSmfUpTime,
    smfCfgIfRowStatus
  }
  STATUS current
  DESCRIPTION
    "Set of SMF configuration objects implemented
    in this module."
 ::= { smfMIBGroups 2 }

smfStateObjectsGroup OBJECT-GROUP
  OBJECTS {
    smfStateNodeRsStatusIncluded,
    smfStateDpdMemoryOverflow,

    smfStateNeighborRSSA,
    smfStateNeighborNextHopInterface
  }
  STATUS current
  DESCRIPTION
    "Set of SMF state objects implemented
    in this module."
 ::= { smfMIBGroups 3 }
```

```
smfPerfObjectsGroup OBJECT-GROUP
  OBJECTS {
    smfPerfIpv4MultiPktsRecvTotal,
    smfPerfIpv4MultiPktsForwardedTotal,
    smfPerfIpv4DuplMultiPktsDetectedTotal,
    smfPerfIpv4DroppedMultiPktsTTLExceededTotal,
    smfPerfIpv4TTLLargerThanPreviousTotal,

    smfPerfIpv6MultiPktsRecvTotal,
    smfPerfIpv6MultiPktsForwardedTotal,
    smfPerfIpv6DuplMultiPktsDetectedTotal,
    smfPerfIpv6DroppedMultiPktsTTLExceededTotal,
    smfPerfIpv6TTLLargerThanPreviousTotal,
    smfPerfIpv6HAVAssistsReqdTotal,
    smfPerfIpv6DpdHeaderInsertionsTotal,

    smfPerfIpv4MultiPktsRecvPerIf,
    smfPerfIpv4MultiPktsForwardedPerIf,
    smfPerfIpv4DuplMultiPktsDetectedPerIf,
    smfPerfIpv4DroppedMultiPktsTTLExceededPerIf,
    smfPerfIpv4TTLLargerThanPreviousPerIf,

    smfPerfIpv6MultiPktsRecvPerIf,
    smfPerfIpv6MultiPktsForwardedPerIf,
    smfPerfIpv6DuplMultiPktsDetectedPerIf,
    smfPerfIpv6DroppedMultiPktsTTLExceededPerIf,
    smfPerfIpv6TTLLargerThanPreviousPerIf,
    smfPerfIpv6HAVAssistsReqdPerIf,
    smfPerfIpv6DpdHeaderInsertionsPerIf
  }
  STATUS current
  DESCRIPTION
    "Set of SMF performance objects implemented
    in this module by total and per interface."
 ::= { smfMIBGroups 4 }

smfNotifObjectsGroup OBJECT-GROUP
  OBJECTS {
    smfNotifDpdMemoryOverflowThreshold,
    smfNotifDpdMemoryOverflowWindow
  }
  STATUS current
  DESCRIPTION
    "Set of SMF notification control
    objects implemented in this module."
 ::= { smfMIBGroups 5 }

smfNotificationsGroup NOTIFICATION-GROUP
```

```
NOTIFICATIONS {
    smfNotifAdminStatusChange,
    smfNotifConfiguredOpModeChange,
    smfNotifIfAdminStatusChange,
    smfNotifDpdMemoryOverflowEvent
}
STATUS current
DESCRIPTION
    "Set of SMF notifications implemented
    in this module."
 ::= { smfMIBGroups 6 }
```

END

8. Security Considerations

This section discusses security implications of the choices made in this SMF-MIB module.

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write and/or read-create. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations. These are the tables and objects and their sensitivity/vulnerability:

- o 'smfCfgAdminStatus' - this writable configuration object controls the operational status of the SMF process. If this setting is configured inconsistently across the MANET multicast domain, then delivery of multicast data may be inconsistent across the domain; some nodes may not receive multicast data intended for them.
- o 'smfCfgRouterIDAddrType' and 'smfCfgRouterID' - these writable configuration objects define the ID of the SMF process. These objects should be configured with a routable address defined on the local SMF device. The smfCfgRouterID is a logical identification that MUST be configured as unique across inter-operating SMF neighborhoods and it is RECOMMENDED to be chosen as the numerically largest address contained in a node's 'Neighbor Address List' as defined in NHDP. A smfCfgRouterID MUST be unique within the scope of the operating MANET network regardless of the method used for selecting it. If these objects are mis-configured or configured in-consistently across the MANET, then the ability of various RSSA algorithms, e.g., ECDS, may be compromised. This would potentially result in some routers within the MANET not

receiving multicast packets destined to them. Hence, intentionally mis-configuring these objects could pose a form of Denial-of-Service (DOS) attack against the MANET.

- o 'smfCfgOpMode' - this writable configuration objects define the operational mode of the SMF process. The operational mode defines how the SMF process receives its data to form its local estimate of the CDS. It is recommended that the value for this object be set consistently across the MANET to ensure proper operation of the multicast packet forwarding. If the value for this object is set inconsistently across the MANET, the result may be that multicast packet delivery will be compromised within the MANET. Hence, intentionally mis-configuring this object could pose a form DOS attack against the MANET.
- o 'smfCfgRssa' - this writable configuration object sets the specific Reduced Set Selection Algorithm (RSSA) for the SMF process. If this object is set inconsistently across the MANET domain, multicast delivery of data will likely fail. Hence, intentionally mis-configuring this object could pose a form DOS attack against the MANET.
- o 'smfCfgRssaMember' - this writable configuration object sets the 'interest' of the local SMF node in participating in the CDS. Setting this object to 'never(3)' on a highly highly connected device could lead to frequent island formation. Setting this object to 'always(2)' could support data ex-filtration from the MANET domain.
- o 'smfCfgIpv4Dpd' - this writable configuration object sets the duplicate packet detection method, i.e., H-DPD or I-DPD, for forwarding of IPv4 multicast packets. Forwarders may operate with mixed H-DPD and I-DPD modes as long as they consistently perform the appropriate DPD routines outlined [RFC6621]. However, it is RECOMMENDED that a deployment be configured with a common mode for operational consistency.
- o 'smfCfgIpv6Dpd' - this writable configuration object sets the duplicate packet detection method for forwarding of IPv6 multicast packets. Since IPv6 SMF does specifies an option header, the interoperability constraints are not as loose as in the IPv4 version, and forwarders SHOULD not operate with mixed H-DPD and I-DPD modes. Hence the value for this object SHOULD be consistently set within the forwarders comprising the MANET, else inconsistent forwarding may result unnecessary multicast packet dropping.

- o 'smfCfgMaxPktLifetime' - this writable configuration object sets the estimate of the network packet traversal time. If set too small, this could lead to poor multicast data delivery ratios throughout the MANET domain. This could serve as a form of DOS attack if this object value is set too small.
- o 'smfCfgDpdEntryMaxLifetime' - this writable configuration object sets the maximum lifetime (in seconds) for the cached DPD records for the combined IPv4 and IPv6 methods. If the memory is running low prior to the MaxLifetimes being exceeded, the local SMF devices should purge the oldest records first. If this object value is set too small, then the effectiveness of the SMF DPD algorithms may become greatly diminished causing a higher than necessary packet load on the MANET.
- o 'smfCfgNhdpRssaMesgTLVIncluded' - this writable configuration object indicates whether the associated NHDP messages include the the RSSA Message TLV, or not. It is highly RECOMMENDED that this object be set to 'true(1)' when the SMF operation mode is set to independent as this information will inform the local forwarder of the RSSA algorithm implemented in neighboring forwarders and is used to ensure consistent forwarding across the MANET. While it is possible that SMF neighbors MAY be configured differently with respect to the RSSA algorithm and still operate cooperatively, but these cases will vary dependent upon the algorithm types designated and this situation SHOULD be avoided.
- o 'smfCfgNhdpRssaAddrBlockTLVIncluded' - this writable configuration object indicates whether the associated NHDP messages include the the RSSA Address Block TLV, or not. The smfNhdpRssaAddrBlockTLVIncluded is optional in all cases as it depends on the existence of an address block which may not be present. If this SMF device is configured with NHDP, then this object should be set to 'true(1)' as this TLV enables CDS relay algorithm operation and configuration to be shared among 2-hop neighborhoods. Some relay algorithms require 2-hop neighbor configuration in order to correctly select relay sets.
- o 'smfCfgAddrForwardingTable' - the writable configuration objects in this table indicate which multicast IP addresses are to be forwarded by this SMF node. Misconfiguration of rows within this table can limit the ability of this SMF device to properly forward multicast data.
- o 'smfCfgInterfaceTable' - the writable configuration objects in this table indicate which SMF node interfaces are participating in the SMF packet forwarding process. Misconfiguration of rows within this table can limit the ability of this SMF device to

properly forward multicast data.

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP. These are the tables and objects and their sensitivity/vulnerability:

- o 'smfNodeRsStatusIncluded' - this readable state object indicates that this SMF node is part of the CDS, or not. Being part of the CDS makes this node a distinguished device. It could be exploited for data ex-filtration, or denial of service attacks.
- o 'smfStateNeighborTable' - the readable state objects in this table indicate current neighbor nodes to this SMF node. Exposing this information to an attacker could allow the attacker easier access to the larger MANET domain.

The remainder of the objects in the SMF-MIB module are performance counter objects. While these give an indication of the activity of the SMF process on this node, it is not expected that exposing these values pose a security risk to the MANET network.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPSec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB module.

Implementations MUST provide the security features described by the SNMPv3 framework (see [RFC3410]), including full support for authentication and privacy via the User-based Security Model (USM) [RFC3414] with the AES cipher algorithm [RFC3826]. Implementations MAY also provide support for the Transport Security Model (TSM) [RFC5591] in combination with a secure transport such as SSH [RFC5592] or TLS/DTLS [RFC6353].

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

9. Applicability Statement

This document describes objects for configuring parameters of the Simplified Multicast Forwarding [RFC6621] process on a Mobile Ad-Hoc Network (MANET) router. This MIB module, denoted SMF-MIB, also reports state and performance information and notifications. This section provides some examples of how this MIB module can be used in MANET network deployments. A fuller discussion of MANET network management use cases and challenges will be provided elsewhere.

SMF is designed to allow MANET routers to forward IPv4 and IPv6 packets over the MANET and cover the MANET nodes through the automatic discovery of efficient estimates of the Minimum Connected Dominating Set (MCDS) of nodes within the MANET. The MCDS are estimated using the Relay Set Selection Algorithms (RSSAs) discussed within this document. In the following, three scenarios are listed where this MIB module is useful, i.e.,

- o For a Parking Lot Initial Configuration Situation - it is common for the vehicles comprising the MANET being forward deployed at a remote location, e.g., the site of a natural disaster, to be off-loaded in a parking lot where an initial configuration of the networking devices is performed. The configuration is loaded into the devices from a fixed location Network Operation Center (NOC) at the parking lot and the vehicles are stationary at the parking lot while the configuration changes are made. Standards-based methods for configuration management from the co-located NOC are necessary for this deployment option. The set of interesting configuration objects for the SMF process are listed within this MIB module.
- o For Mobile vehicles with Low Bandwidth Satellite Link to a Fixed NOC - Here the vehicles carrying the MANET routers carry multiple wireless interfaces, one of which is a relatively low-bandwidth on-the-move satellite connection which interconnects a fix NOC to the nodes of the MANET. Standards-based methods for monitoring and fault management from the fixed NOC are necessary for this deployment option.
- o For Fixed NOC and Mobile Local Manager in Larger Vehicles - for larger vehicles, a hierarchical network management arrangement is useful. Centralized network management is performed from a fixed NOC while local management is performed locally from within the vehicles. Standards-based methods for configuration, monitoring and fault management are necessary for this deployment option.

Here we provide an example of the simplest of configurations to establish an operational multicast forwarding capability in a MANET.

This discussion only identifies the configuration necessary through the SMF-MIB module and assumes that other configuration has occurred. Assume that the MANET is to support only IPv4 addressing and that the MANET nodes are to be configured in the context of the Parking Lot Initialization case above. Then the SMF-MIB module defines ten configuration OIDs and two configuration tables, i.e., the smfCfgAddrForwardingTable and the smfCfgInterfaceTable. Of the ten OIDs defined, all but one, i.e., the smfCfgRouterID, have DEFVAL clauses which allow for a functional configuration of the SMF process within the MANET. The smfCfgRouterIDType defaults to 'ipv4' so the smfCfgRouterID can be set as, e.g.,:

```
snmpset [options] <smfCfgRouterID_OID>.0 a 192.168.1.100
```

If the smfCfgAddrForwardingTable is left empty, then the SMF local forwarder will forward all multicast addresses. So this table does not require configuration if you want to have the MANET forward all multicast addresses.

All that remains is to configure at least one row in the smfCfgInterfaceTable. Assume that the node has a wireless interface with an <ifName>='wlan0' and an <ifIndex>='1'. All of the objects in the rows of the smfCfgInterfaceTable have a DEFVAL clause, hence only the RowStatus object needs to be set. So the SMF process will be activated on the 'wlan0' interface by the following network manager snmpset command:

```
snmpset [options] <smfCfgIfRowStatus>.1 i active(1)
```

At this point, the configured forwarder will begin a Classical Flooding algorithm to forward all multicast addresses IPv4 packets it receives. If the

To provide a more efficient multicast forwarding within the MANET, the network manager could walk the smfCapabilitiesTable to identify other SMF operational modes, e.g.,:

```
snmpwalk -c public -v 2c router <smfCapabilitiesTable>
```

```
SMF-MIB::smfCapabilitiesIndex.1 = INTEGER: 1
```

```
SMF-MIB::smfCapabilitiesIndex.2 = INTEGER: 2
```

```
SMF-MIB::smfCapabilitiesOpModeID.1 = INTEGER: cfOnly(1)
```

```
SMF-MIB::smfCapabilitiesOpModeID.2 = INTEGER: independent(2)
```

```
SMF-MIB::smfCapabilitiesRssaID.1 = INTEGER: cF(1)
```

SMF-MIB::smfCapabilitiesRssaID.2 = INTEGER: eCDS(3)

In this example, the forwarding device also supports the Extended Connected Dominating Set (eCDS) RSSA with the forwarder in the 'independent(2)' operational mode. If the network manager were to then issue an snmpset, e.g.,:

```
snmpset [options] <smfCfgOperationalMode>.0 i 2
```

then the local forwarder would switch its forwarding behavior from Classical Flooding to the more efficient eCDS flooding.

10. IANA Considerations

The MIB module in this document uses the following IANA-assigned OBJECT IDENTIFIER value recorded in the SMI Numbers registry:

Descriptor	OBJECT IDENTIFIER value
-----	-----
SMF-MIB	{ experimental XXXX }
IANA EDITOR NOTE: please assign XXXX, and remove this note.	

11. Contributors

This MIB document uses the template authored by D. Harrington which is based on contributions from the MIB Doctors, especially Juergen Schoenwaelder, Dave Perkins, C.M.Heard and Randy Presuhn.

12. Acknowledgements

The authors would like to acknowledge the valuable comments from Sean Harnedy in the early phases of the development of this MIB module. The authors would like to thank James Nguyen for his careful review and comments on this MIB module and his work on the definitions of the follow on MIB modules to configure specific RSSA algorithms related to SMF. Further, the authors would like to acknowledge to work of James Nguyen, Brian Little, Ryan Morgan and Justin Dean on their software development of the SMF-MIB.

13. References

13.1. Normative References

- [RFC2863] McCloghrie, K. and F. Kastenholz, "The Interfaces Group MIB", RFC 2863, June 2000.
- [RFC3411] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing Simple Network Management

Protocol (SNMP) Management Frameworks", STD 62, RFC 3411, December 2002.

- [RFC3418] Presuhn, R., "Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3418, December 2002.
- [RFC4001] Daniele, M., Haberman, B., Routhier, S., and J. Schoenwaelder, "Textual Conventions for Internet Network Addresses", RFC 4001, February 2005.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [RFC2578] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Structure of Management Information Version 2 (SMIv2)", STD 58, RFC 2578, April 1999.
- [RFC2579] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Textual Conventions for SMIv2", STD 58, RFC 2579, April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIv2", STD 58, RFC 2580, April 1999.
- [RFC6621] Macker, J., "Simplified Multicast Forwarding", RFC 6621, May 2012.

13.2. Informative References

- [RFC3410] Case, J., Mundy, R., Partain, D., and B. Stewart, "Introduction and Applicability Statements for Internet-Standard Management Framework", RFC 3410, December 2002.
- [RFC3414] Blumenthal, U. and B. Wijnen, "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)", STD 62, RFC 3414, December 2002.
- [RFC3826] Blumenthal, U., Maino, F., and K. McCloghrie, "The Advanced Encryption Standard (AES) Cipher Algorithm in the SNMP User-based Security Model", RFC 3826, June 2004.
- [RFC5591] Harrington, D. and W. Hardaker, "Transport Security Model for the Simple Network Management Protocol (SNMP)", RFC 5591, June 2009.
- [RFC5592] Harrington, D., Salowey, J., and W. Hardaker, "Secure

Shell Transport Model for the Simple Network Management Protocol (SNMP)", RFC 5592, June 2009.

[RFC6353] Hardaker, W., "Transport Layer Security (TLS) Transport Model for the Simple Network Management Protocol (SNMP)", RFC 6353, July 2011.

Appendix A. Appendix A:

This appendix contains the IANAsmfOpModeID-MIB module defined by this specification below. The RFC editor should remove this specification of the IANAsmfOpModeID-MIB upon publication of the SMF-MIB. Further, IANA should take over the IANAsmfOpModeID-MIB and to keep it synchronized with the registry identified below within the IANAsmfOpModeIdTC TEXTUAL-CONVENTION.

```
IANAsmfOpModeID-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
  MODULE-IDENTITY, mib-2
    FROM SNMPv2-SMI
  TEXTUAL-CONVENTION
    FROM SNMPv2-TC;
```

```
ianasmfOpModeID MODULE-IDENTITY
```

```
  LAST-UPDATED "201401190000Z" -- January 19, 2014
  ORGANIZATION "IANA"
  CONTACT-INFO "Internet Assigned Numbers Authority
```

```
    Postal: ICANN
           4676 Admiralty Way, Suite 330
           Marina del Rey, CA 90292
```

```
    Tel:    +1 310 823 9358
    E-Mail: iana@iana.org"
```

```
DESCRIPTION "This MIB module defines the
  IANAsmfOpModeIdTC Textual
  Convention, and thus the enumerated values of
  the smfCapabilitiesOpModeID object defined in
  the SMF-MIB."
```

```
REVISION "201401190000Z" -- January 19, 2014
```

```
DESCRIPTION "Initial version of this MIB as published in
  RFC KKKK."
```

```
::= { mib-2 kkkk }
```

```
IANAsmfOpModeIdTC ::= TEXTUAL-CONVENTION
```

```
  STATUS current
```

DESCRIPTION

"An index that identifies through reference to a specific SMF operations mode. There are basically three styles of SMF operation with reduced relay sets:

Independent operation 'independent(1)' -
SMF performs its own relay
set selection using information from an associated
MANET NHDP process.

CDS-aware unicast routing operation 'routing(2) '-
a coexistent unicast routing
protocol provides dynamic relay
set state based upon its own control plane
CDS or neighborhood discovery information.

Cross-layer operation 'crossLayer(3)' -
SMF operates using neighborhood
status and triggers from a
cross-layer information base for dynamic relay
set selection and maintenance.

IANA MUST update this textual convention accordingly.

The definition of this textual convention with the addition of newly assigned values is published periodically by the IANA, in either the Assigned Numbers RFC, or some derivative of it specific to Internet Network Management number assignments. (The latest arrangements can be obtained by contacting the IANA.)

Requests for new values should be made to IANA via email (iana@iana.org)."

REFERENCE

"See Section 7.2. 'Reduced Relay Set Forwarding', and the Appendices A, B and C in RFC 6621 - Simplified Multicast Forwarding (SMF), Macker, J., May 2012."

```
SYNTAX INTEGER {  
    independent (1),  
    routing (2),  
    crossLayer (3)  
    -- future (4-255)  
}
```

END

Appendix B. Appendix B:

This appendix contains the IANAsmfRssaID-MIB module defined by this specification below. The RFC editor should remove this specification of the IANAsmfRssaID-MIB upon publication of the SMF-MIB. Further, IANA should take over the IANAsmfRssaID-MIB and to keep it synchronized with the registry identified below within the IANAsmfRssaIdTC TEXTUAL-CONVENTION.

```
IANAsmfRssaID-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
    MODULE-IDENTITY, mib-2
        FROM SNMPv2-SMI
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC;
```

```
ianasmfRssaID MODULE-IDENTITY
```

```
    LAST-UPDATED "201401190000Z" -- January 19, 2014
    ORGANIZATION "IANA"
    CONTACT-INFO "Internet Assigned Numbers Authority
```

```
        Postal: ICANN
                4676 Admiralty Way, Suite 330
                Marina del Rey, CA 90292
```

```
        Tel:      +1 310 823 9358
        E-Mail:   iana@iana.org"
```

```
DESCRIPTION "This MIB module defines the
              IANAsmfRssaIdTC Textual
              Convention, and thus the enumerated values of
              the smfCapabilitiesRssaID object defined in
              the SMF-MIB."
```

```
REVISION "201401190000Z" -- January 19, 2014
```

```
DESCRIPTION "Initial version of this MIB as published in
              RFC LLLL."
```

```
::= { mib-2 1111 }
```

```
IANAsmfRssaIdTC ::= TEXTUAL-CONVENTION
```

```
    STATUS current
```

```
DESCRIPTION
```

```
    "An index that identifies through reference to a specific
     RSSA algorithms. Several are currently defined
     in the Appendix A, B and C of RFC 6621.
```

```
    Examples of RSSA algorithms already identified within
```

this TC are:

Classical Flooding (cF(1)) - is the standard flooding algorithm where each node in the next retransmits the information on each of its interfaces.

Source-Based Multipoint Relay (sMPR(2)) - this algorithm is used by Optimized Link State Routing (OLSR) and OLSR version 2 (OLSRv2) protocols for the relay of link state updates and other control information [RFC3626]. Since each router picks its neighboring relays independently, sMPR forwarders depend upon previous hop information (e.g., source MAC address) to operate correctly.

Extended Connected Dominating Set (eCDS(3)) - defined in [RFC5614] this algorithm forms a single CDS mesh for the SMF operating region. Its packet-forwarding rules are not dependent upon previous hop knowledge in contrast to sMPR.

Multipoint Relay Connected Dominating Set (mprCDS(4)) - This algorithm is an extension to the basic sMPR election algorithm that results in a shared (non-source-specific) SMF CDS. Thus, its forwarding rules are not dependent upon previous hop information, similar to eCDS.

IANA MUST update this textual convention accordingly.

The definition of this textual convention with the addition of newly assigned values is published periodically by the IANA, in either the Assigned Numbers RFC, or some derivative of it specific to Internet Network Management number assignments. (The latest arrangements can be obtained by contacting the IANA.)

Requests for new values should be made to IANA via email (iana@iana.org)."

REFERENCE

"See, e.g.,

Section 8.1.1. 'SMF Message TLV Type',
Appendix A. 'Essential Connecting Dominating Set (E-CDS) Algorithm',
Appendix B. 'Source-Based Multipoint Relay (S-MPR) Algorithm', and

Appendix C. 'Multipoint Relay Connected Dominating Set
(MPR-CDS) Algorithm'

in RFC 6621 - Simplified Multicast Forwarding
(SMF), Macker, J., May 2012."

```
SYNTAX      INTEGER {  
              cF(1),  
              sMPR(2),  
              eCDS(3),  
              mprCDS(4)  
              -- future(5-127)  
              -- noStdAction(128-239)  
              -- experimental(240-255)  
            }
```

END

Appendix C.

```

*****
* Note to the RFC Editor (to be removed prior to publication) *
*
*
* 1) The reference to RFCXXXX throughout this document point *
* to the current draft-ietf-manet-smf-xx.txt. This needs *
* to be replaced with the XXXX RFC number for the SMF *
* publication. *
*
* 2) Appendix A contains the IANAsmfOpModeID-MIB *
* module which is defined by this specification in the *
* appendix. The RFC editor should remove this specification *
* of the IANAsmfOpModeID-MIB upon publication of *
* the SMF-MIB. Further, IANA should take over the *
* IANAsmfOpModeID-MIB and keep it synchronized *
* with the registry identified within the contained *
* IANAsmfOpModeIdTC TEXTUAL-CONVENTION. *
*
* 3) Appendix B contains the IANAsmfRssaID-MIB *
* module which is defined by this specification in the *
* appendix. The RFC editor should remove this specification *
* of the IANAsmfRssaID-MIB upon publication of *
* the SMF-MIB. Further, IANA should take over the *
* IANAsmfRssaID-MIB and keep it synchronized *
* with the registry identified within the contained *
* IANAsmfRssaID TEXTUAL-CONVENTION. *
*
*****

```

Authors' Addresses

Robert G. Cole
 US Army CERDEC
 6010 Frankford Road
 Aberdeen Proving Ground, Maryland 21005
 USA

Phone: +1 443 395 8744
 EMail: robert.g.cole@us.army.mil

Joseph Macker
Naval Research Laboratory
Washington, D.C. 20375
USA

EMail: macker@itd.nrl.navy.mil

Brian Adamson
Naval Research Laboratory
Washington, D.C. 20375
USA

EMail: adamson@itd.nrl.navy.mil

