

INTERNET DRAFT  
draft-ietf-ips-iser-02.txt

Mike Ko  
John Hufferd  
IBM Corporation  
Mallikarjun Chadalapaka  
Hewlett-Packard Company  
Uri Elzur  
Broadcom Corporation  
Hemal Shah  
Intel Corporation  
Patricia Thaler  
Agilent Technologies, Inc.

Expires: September, 2005

Style Definition: ietf: No underline

Style Definition: rdmac: Hidden

Deleted: 1

Deleted: August

## iSCSI Extensions for RDMA Specification

### Status of this Memo

By submitting this Internet-Draft, I certify that any applicable patent or other IPR claims of which I am aware have been disclosed, or will be disclosed, and any of which I become aware will be disclosed, in accordance with RFC 3668.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

### Abstract

iSCSI Extensions for RDMA provides the RDMA data transfer capability to iSCSI [iSCSI] by layering iSCSI on top of the Remote Direct Memory Access Protocol (RDMA). The iWARP protocol suite provides RDMA Read and Write services, which enable data to be transferred directly into SCSI I/O Buffers without intermediate data copies.

Deleted: January

This document describes the extensions to the iSCSI protocol to support RDMA services as defined by the iWARP protocol suite.

Table of Contents

1 Definitions and Acronyms ..... 7

1.1 Definitions ..... 7

1.2 Acronyms ..... 12

2 Introduction ..... 15

2.1 Motivation ..... 15

2.2 Architectural Goals ..... 16

2.3 Protocol Overview ..... 17

2.4 RDMA services and iSER ..... 18

2.4.1 STag..... 18

2.4.2 Send..... 19

2.4.3 RDMA Write..... 19

2.4.4 RDMA Read..... 19

2.5 SCSI Read Overview ..... 20

2.6 SCSI Write Overview ..... 20

2.7 iSCSI/iSER Layering ..... 20

3 Upper Layer Interface Requirements ..... 22

3.1 Operational Primitives offered by iSER ..... 22

3.1.1 Send\_Control..... 22

3.1.2 Put\_Data..... 23

3.1.3 Get\_Data..... 23

3.1.4 Allocate\_Connection\_Resources..... 23

3.1.5 Deallocate\_Connection\_Resources..... 24

3.1.6 Enable\_Datamover..... 24

3.1.7 Connection\_Terminate..... 25

3.1.8 Notice\_Key\_Values..... 25

3.1.9 Deallocate\_Task\_Resources..... 25

3.2 Operational Primitives used by iSER ..... 25

3.2.1 Control\_Notify..... 26

3.2.2 Data\_Completion\_Notify..... 26

3.2.3 Data\_ACK\_Notify..... 26

3.2.4 Connection\_Terminate\_Notify..... 27

3.3 iSCSI Protocol Usage Requirements ..... 27

4 Lower Layer Interface Requirements ..... 29

4.1 Interactions with the iWARP Layer ..... 29

4.2 Interactions with the Transport Layer ..... 30

5 Connection Setup and Termination ..... 31

5.1 iSCSI/iSER Connection Setup ..... 31

5.1.1 Initiator Behavior..... 32

5.1.2 Target Behavior..... 34

5.1.3 iSER Hello Exchange..... 36

5.2 iSCSI/iSER Connection Termination ..... 37

5.2.1 Normal Connection Termination at the Initiator..... 37

5.2.2 Normal Connection Termination at the Target..... 37

5.2.3 Termination without Logout Request/Response PDUs..... 38

6 Login/Text Operational Keys ..... 40

- 6.1 HeaderDigest and DataDigest .....40
- 6.2 MaxRecvDataSegmentLength .....40
- 6.3 RDMAExtensions .....40
- 6.4 TargetRecvDataSegmentLength .....41
- 6.5 InitiatorRecvDataSegmentLength .....42
- 6.6 OFMarker and IFMarker .....42
- 6.7 MaxOutstandingUnexpectedPDUs .....43
- 7 iSCSI PDU Considerations .....44
- 7.1 iSCSI Data-Type PDU .....44
- 7.2 iSCSI Control-Type PDU .....45
- 7.3 iSCSI PDUs .....45
- 7.3.1 SCSI Command.....45
- 7.3.2 SCSI Response.....47
- 7.3.3 Task Management Function Request/Response.....48
- 7.3.4 SCSI Data-out.....50
- 7.3.5 SCSI Data-in.....50
- 7.3.6 Ready To Transfer (R2T).....53
- 7.3.7 Asynchronous Message.....55
- 7.3.8 Text Request & Text Response.....55
- 7.3.9 Login Request & Login Response.....55
- 7.3.10 Logout Request & Logout Response.....56
- 7.3.11 SNACK Request.....56
- 7.3.12 Reject.....56
- 7.3.13 NOP-Out & NOP-In.....56
- 8 Flow Control and STag Management .....58
- 8.1 Flow Control for RDMA Send Message Types .....58
- 8.2 Flow Control for RDMA Read Resources .....58
- 8.3 Flow Control for Control-Type PDUs from the Initiator .....59
- 8.4 Flow Control for Control-Type PDUs from the Target .....61
- 8.5 STag Management .....61
- 8.5.1 Allocation of STags.....62
- 8.5.2 Invalidation of STags.....62
- 9 iSER Control and Data Transfer .....64
- 9.1 iSER Header Format .....64
- 9.2 iSER Header Format for iSCSI Control-Type PDU .....64
- 9.3 iSER Header Format for iSER Hello Message .....66
- 9.4 iSER Header Format for iSER HelloReply Message .....67
- 9.5 SCSI Data Transfer Operations .....68
- 9.5.1 SCSI Write Operation.....68
- 9.5.2 SCSI Read Operation.....69
- 9.5.3 Bidirectional Operation.....69
- 10 iSER Error Handling and Recovery .....70
- 10.1 Error Handling.....70
- 10.1.1 Errors in the Transport Layer.....70
- 10.1.2 Errors in the iWARP protocol suite.....71
- 10.1.3 Errors in the iSER Layer.....71
- 10.1.4 Errors in the iSCSI Layer.....73

10.2 Error Recovery.....75

10.2.1 SNACK Handling and PDU Recovery.....75

10.2.2 Connection Recovery.....76

11 Security Considerations.....77

12 References.....78

12.1 Normative References.....78

12.2 Informative References.....78

13 Appendix.....79

13.1 iWARP Message Format for iSER.....79

13.1.1 iWARP Message Format for iSER Hello Message.....79

13.1.2 iWARP Message Format for iSER HelloReply Message.....80

13.1.3 iWARP Message Format for SCSI Read Command PDU.....81

13.1.4 iWARP Message Format for SCSI Read Data.....82

13.1.5 iWARP Message Format for SCSI Write Command PDU.....83

13.1.6 iWARP Message Format for RDMA Read Request.....84

13.1.7 iWARP Message Format for Solicited SCSI Write Data.....85

13.1.8 iWARP Message Format for SCSI Response PDU.....86

14 Author's Address.....87

15 Acknowledgments.....88

16 Full Copyright Statement.....89

**Deleted:** [1. Definitions and Acronyms](#). 7¶

[1.1. Definitions](#). 7¶

[1.2. Acronyms](#). 12¶

**2. Introduction**. 15¶

[2.1. Motivation](#). 15¶

[2.2. Architectural Goals](#). 16¶

[2.3. Protocol Overview](#). 17¶

[2.4. RDMA services and iSER](#). 18¶

[2.4.1. Stag](#). 18¶

[2.4.2. Send](#). 19¶

[2.4.3. RDMA Write](#). 19¶

[2.4.4. RDMA Read](#). 19¶

[2.5. SCSI Read Overview](#). 20¶

[2.6. SCSI Write Overview](#). 20¶

[2.7. iSCSI/iSER Layering](#). 20¶

**3. Upper Layer Interface Requirements**. 22¶

[3.1. Operational Primitives offered by iSER](#). 22¶

[3.1.1. Send\\_Control](#). 22¶

[3.1.2. Put\\_Data](#). 23¶

[3.1.3. Get\\_Data](#). 23¶

[3.1.4. Allocate\\_Connection\\_Resources](#). 23¶

[3.1.5. Deallocate\\_Connection\\_Resources](#). 24¶

[3.1.6. Enable\\_Datamover](#). 24¶

[3.1.7. Connection\\_Terminate](#). 25¶

[3.1.8. Notice\\_Key\\_Values](#). 25¶

[3.1.9. Deallocate\\_Task\\_Resources](#). 25¶

[3.2. Operational Primitives used by iSER](#). 25¶

[3.2.1. Control\\_Notify](#). 26¶

[3.2.2. Data\\_Completion\\_Notify](#). 26¶

[3.2.3. Data\\_ACK\\_Notify](#). 26¶

[3.2.4. Connection\\_Terminate\\_Notify](#). 27¶

[3.3. iSCSI Protocol Usage Requirements](#). 27¶

**4. Lower Layer Interface Requirements**. 29¶

[4.1. Interactions with the iWARP Layer](#). 29¶

[4.2. Interactions with the Transport Layer](#). 30¶

**5. Connection Setup and Termination**. 31¶

[5.1. iSCSI/iSER Connection Setup](#). 31¶

[5.1.1. Initiator Behavior](#) ... [1]

Table of Figures

Figure 1 Example of iSCSI/iSER Layering in Full Feature Mode ....21

Figure 2 iSER Header Format .....64

Figure 3 iSER Header Format for iSCSI Control-Type PDU .....65

Figure 4 iSER Header Format for iSER Hello Message .....66

Figure 5 iSER Header Format for iSER HelloReply Message .....67

Figure 6 SendSE Message containing an iSER Hello Message .....79

Figure 7 SendSE Message containing an iSER HelloReply Message ...80

Figure 8 SendSE Message containing a SCSI Read Command PDU .....81

Figure 9 RDMA Write Message containing SCSI Read Data .....82

Figure 10 SendSE Message containing a SCSI Write Command PDU ...83

Figure 11 RDMA Read Request Message .....84

Figure 12 RDMA Read Response Message containing SCSI Write Data .85

Figure 13 SendInvSE Message containing SCSI Response PDU .....86

Deleted: 80

Deleted: 81

Deleted: 82

Deleted: 83

Deleted: 84

Deleted: 85

Deleted: 86

Deleted: 87

Deleted: August

## 1 Definitions and Acronyms

Some of the following definitions are taken from [RDMAP]. In those definitions, the term ULP refers to the iSER Layer.

### 1.1 Definitions

Advertisement (Advertised, Advertise, Advertisements, Advertises) - The act of informing a Remote Peer that a local node's buffer is available to it. A Node makes a buffer available for incoming RDMA Read Request Message or incoming RDMA Write Message access by informing its RDMA/DDP peer of the Tagged Buffer identifiers (STag, TO, and buffer length). This Advertisement of Tagged Buffer information is not defined by RDMA/DDP and is left to the ULP. A typical method would be for the Local Peer to embed the Tagged Buffer's STag, TO, and buffer length in a Send Message destined for the Remote Peer.

Deleted: '

Completion (Completed, Complete, Completes) - Completion is defined as the process by the iWARP layer to inform the ULP, in this case the iSER Layer, that a particular RDMA Operation has performed all functions specified for the RDMA Operation.

Connection - A connection is a logical circuit between the initiator and the target, e.g., a TCP connection. Communication between the initiator and the target occurs over one or more connections. The connections carry control messages, SCSI commands, parameters, and data within iSCSI Protocol Data Units (iSCSI PDUs).

Connection Handle - An information element that identifies the particular iSCSI connection and is unique for a given iSCSI-iSER pair. Every invocation of an Operational Primitive is qualified with the Connection Handle.

Deleted: MUST be

Data Sink - The peer receiving a data payload. Note that the Data Sink can be required to both send and receive RDMAP Messages to transfer a data payload.

Data Source - The peer sending a data payload. Note that the Data Source can be required to both send and receive RDMAP Messages to transfer a data payload.

Datamover Interface (DI) - The interface between the iSCSI Layer and the Datamover Layer as described in [DA].

Deleted: August

Datamover Layer - A layer that is directly below the iSCSI Layer and above the underlying transport layers. This layer exposes and uses a set of transport independent Operational Primitives for the communication between the iSCSI Layer and itself. The Datamover layer, operating in conjunction with the transport layers, moves the control and data information on the iSCSI connection. In this specification, the iSER Layer is the Datamover layer.

Datamover Protocol - A Datamover protocol is the wire-protocol that is defined to realize the Datamover layer functionality. In this specification, the iSER protocol is the Datamover protocol.

Event - An indication provided by the RDMAP Layer to the ULP to indicate a Completion or other condition requiring immediate attention.

Inbound RDMA Read Queue Depth (IRD) - The maximum number of incoming outstanding RDMA Read Requests that the RNIC can handle on a particular RDMAP Stream at the Data Source.

Invalidate STag - A mechanism used to prevent the Remote Peer from reusing a previous explicitly Advertised STag, until the Local Peer makes it available through a subsequent explicit Advertisement.

I/O Buffer - A buffer that is used in a SCSI Read or Write operation so SCSI data may be sent from or received into that buffer.

iSCSI - The iSCSI protocol is a mapping of the SCSI remote procedure model of SAM-2 over the TCP, and the protocol itself is defined in [iSCSI].

iSCSI control-type PDU - Any iSCSI PDU that is not an iSCSI data-type PDU and also not a SCSI Data-out PDU carrying solicited data is defined as an iSCSI control-type PDU. Specifically, it is to be noted that SCSI Data-out PDUs for unsolicited data are defined as iSCSI control-type PDUs.

iSCSI data-type PDU - An iSCSI data-type PDU is defined as an iSCSI PDU that causes data transfer, transparent to the remote iSCSI Layer, to take place between the peer iSCSI nodes on a full feature phase iSCSI connection. An iSCSI data-type PDU, when requested for transmission by the sender iSCSI Layer, results in the associated data transfer without the participation of the remote iSCSI Layer, i.e. the PDU itself is not delivered as-is

to the remote iSCSI Layer. The following iSCSI PDUs constitute the set of iSCSI data-type PDUs - SCSI Data-In PDU and R2T PDU.

iSCSI Layer - A layer in the protocol stack implementation within an end node that implements the iSCSI protocol and interfaces with the iSER Layer via the Datamover Interface.

iSCSI PDU (iSCSI Protocol Data Unit) - The iSCSI Layer at the initiator and the iSCSI Layer at the target divide their communications into messages. The term "iSCSI protocol data unit" (iSCSI PDU) is used for these messages.

iSCSI/iSER Connection - An iSER-assisted iSCSI connection.

iSCSI/iSER Session - An iSER-assisted iSCSI session.

iSCSI-iSER Pair - The iSCSI Layer and the underlying iSER Layer.

iSER - iSCSI Extensions for RDMA, the protocol defined in this document.

iSER-assisted - A term generally used to describe the operation of iSCSI when the iSER functionality is also enabled below the iSCSI Layer for the specific iSCSI/iSER connection in question.

iSER-IRD - This variable represents the maximum number of incoming outstanding RDMA Read Requests that the iSER Layer at the initiator declares on a particular RDMAP Stream.

iSER-ORD - This variable represents the maximum number of outstanding RDMA Read Requests that the iSER Layer can initiate on a particular RDMAP Stream. This variable is maintained only by the iSER Layer at the target.

iSER Layer - The layer that implements the iSCSI Extensions for RDMA (iSER) protocol.

iWARP - A suite of wire protocols comprising of [RDMAP], [DDP], and [MPA] when layered above [TCP]. [RDMAP] and [DDP] may be layered above SCTP or other transport protocols.

Local Peer - The RDMAP implementation on the local end of the connection. Used to refer to the local entity when describing protocol exchanges or other interactions between two Nodes.

Node - A computing device attached to one or more links of a network. A Node in this context does not refer to a specific

application or protocol instantiation running on the computer. A Node may consist of one or more RNICs installed in a host computer.

Operational Primitive - An Operational Primitive is an abstract functional interface procedure that requests another layer to perform a specific action on the requestor's behalf or notifies the other layer of some event. The Datamover Interface between an iSCSI Layer and a Datamover layer within an iSCSI end node uses a set of Operational Primitives to define the functional interface between the two layers. Note that not every invocation of an Operational Primitive may elicit a response from the requested layer. A full discussion of the Operational Primitive types and request-response semantics available to iSCSI and iSER can be found in [DA].

Deleted: '

Outbound RDMA Read Queue Depth (ORD) - The maximum number of outstanding RDMA Read Requests that the RNIC can initiate on a particular RDMAP Stream at the Data Sink.

RDMA-enabled Network Interface Controller (RNIC) - A network I/O adapter or embedded controller with iWARP functionality.

RDMA Operation - A sequence of RDMAP Messages, including control Messages, to transfer data from a Data Source to a Data Sink. The following RDMA Operations are defined - RDMA Write Operation, RDMA Read Operation, Send Operation, Send with Invalidate Operation, Send with Solicited Event Operation, Send with Solicited Event and Invalidate Operation, and Terminate Operation.

RDMA Protocol (RDMAP) - A wire protocol that supports RDMA Operations to transfer ULP data between a Local Peer and the Remote Peer as described in [RDMAP].

RDMA Read Operation - An RDMA Operation used by the Data Sink to transfer the contents of a Data Source buffer from the Remote Peer to a Data Sink buffer at the Local Peer. An RDMA Read operation consists of a single RDMA Read Request Message and a single RDMA Read Response Message.

RDMA Read Request - An RDMAP Message used by the Data Sink to request the Data Source to transfer the contents of a buffer. The RDMA Read Request Message describes both the Data Source and the Data Sink buffers.

Deleted: August

RDMA Read Response - An RDMAP Message used by the Data Source to transfer the contents of a buffer to the Data Sink, in response to an RDMA Read Request. The RDMA Read Response Message only describes the Data Sink buffer.

RDMA Write Operation - An RDMA Operation used by the Data Source to transfer the contents of a Data Source buffer from the Local Peer to a Data Sink buffer at the Remote Peer. The RDMA Write Message only describes the Data Sink buffer.

RDMAP Message - The sequence of RDMAP packets which represent a single RDMA operation or a part of RDMA Read Operation.

RDMAP Stream - A single bidirectional association between the peer RDMAP layers on two Nodes over a single transport-level stream. For iSER, the association is created when the iSCSI connection transitions to iSER-assisted mode following a successful iSCSI Login Phase during which iSER support is negotiated.

Remote Direct Memory Access (RDMA) - A method of accessing memory on a remote system in which the local system specifies the remote location of the data to be transferred. Employing an RNIC in the remote system allows the access to take place without interrupting the processing of the CPU(s) on the system.

Remote Peer - The RDMAP implementation on the opposite end of the connection. Used to refer to the remote entity when describing protocol exchanges or other interactions between two Nodes.

SCSI Layer - This layer builds/receives SCSI CDBs (Command Descriptor Blocks) and sends/receives them with the remaining command execute [SAM2] parameters to/from the iSCSI Layer.

Send - An RDMA Operation that transfers the contents of a ULP Buffer from the Local Peer to a Buffer at the Remote Peer.

Send Message Type - A Send Message, Send with Invalidate Message, Send with Solicited Event Message, or Send with Solicited Event and Invalidate Message.

SendInvSE Message - A Send with Solicited Event and Invalidate Message.

SendSE Message - A Send with Solicited Event Message

Sequence Number (SN) - DataSN for a SCSI Data-in PDU and R2TSN for an R2T PDU. The semantics for both types of sequence numbers are as defined in [iSCSI].

Session, iSCSI Session - The group of Connections that link an initiator SCSI port with a target SCSI port form an iSCSI session (equivalent to a SCSI I-T nexus). Connections can be added to and removed from a session even while the I-T nexus is intact. Across all connections within a session, an initiator sees one and the same target.

Solicited Event (SE) - A facility by which an RDMA Operation sender may cause an Event to be generated at the recipient, if the recipient is configured to generate such an Event, when a Send with Solicited Event or Send with Solicited Event and Invalidate Message is received.

Steering Tag (STag) - An identifier of a Tagged Buffer on a Node as defined in [RDMAP] and [DDP].

Tagged Buffer - A buffer that is explicitly Advertised to a Remote Peer through exchange of an STag, Tagged Offset, and length.

Tagged Offset (TO) - The offset within a Tagged Buffer.

Traditional iSCSI - Refers to the iSCSI protocol defined by [iSCSI] (i.e. without the iSER enhancements).

Untagged Buffer - A buffer that is not explicitly Advertised to the Remote Peer.

1.2 Acronyms

Acronym	Definition
-----	
AHS	Additional Header Segment
BHS	Basic Header Segment
CO	Connection Only
CRC	Cyclic Redundancy Check
DDP	Direct Data Placement Protocol

DI	Datamover Interface
IANA	Internet Assigned Numbers Authority
IETF	Internet Engineering Task Force
I/O	Input - Output
IO	Initialize Only
IP	Internet Protocol
IPsec	Internet Protocol Security
iSER	iSCSI Extensions for RDMA
ITT	Initiator Task Tag
LO	Leading Only
MPA	Marker PDU Aligned Framing for TCP
NOP	No Operation
NSG	Next Stage (during the iSCSI Login Phase)
OS	Operating System
PDU	Protocol Data Unit
R2T	Ready To Transfer
R2TSN	Ready To Transfer Sequence Number
RDMA	Remote Direct Memory Access
RDMAP	Remote Direct Memory Access Protocol
RFC	Request For Comments
RNIC	RDMA-enabled Network Interface Controller
SAM2	SCSI Architecture Model - 2
SCSI	Small Computer Systems Interface
SNACK	Selective Negative Acknowledgment - also

Sequence Number Acknowledgement for data

S<sub>Tag</sub> Steering Tag

SW Session Wide

TCP Transmission Control Protocol

TMF Task Management Function

TO Tagged Offset

ULP Upper Level Protocol

2 Introduction

2.1 Motivation

The iSCSI protocol ([iSCSI]) is a mapping of the SCSI remote procedure invocation model (see [SAM2]) over the TCP protocol. SCSI commands are carried by iSCSI requests and SCSI responses and status are carried by iSCSI responses. Other iSCSI protocol exchanges and SCSI Data are also transported in iSCSI PDUs.

Out-of-order TCP segments in the traditional iSCSI model have to be stored and reassembled before the iSCSI protocol layer within an end node can place the data in the iSCSI buffers. This reassembly is required because not every TCP segment is likely to contain an iSCSI header to enable its placement and TCP itself does not have a built-in mechanism for signaling ULP message boundaries to aid placement of out-of-order segments. This TCP reassembly at high network speeds is quite counter-productive for the following reasons: wasted memory bandwidth in data copying, need for reassembly memory, wasted CPU cycles in data copying, and the general store-and-forward latency from an application perspective. [iSCSI] itself recognized that TCP reassembly could be a serious issue and had introduced the notion of a "sync and steering layer" that is optional to implement and use. [iSCSI] further defined one specific sync and steering layer - called "markers" - an application-level way of framing iSCSI PDUs within the TCP data stream even when the TCP segments are not yet reassembled to be in-order.

With these [iSCSI] defined techniques, a Network Interface Controller customized for iSCSI (SNIC) could offload the TCP/IP processing and support direct data placement.

Supporting direct data placement is the main function of the iWARP protocol suite. A NIC enhanced with the RDMAP/DDP functions (RNIC) can be used by any application that has been extended to support RDMA.

With the availability of RNICs within a host system, which does not have SNICs, it is appropriate for iSCSI to be able to exploit the direct data placement function of the RNIC like other applications.

iSCSI Extensions for RDMA (iSER) is designed precisely to take advantage of generic RDMA technologies - iSER's goal is to permit iSCSI to employ direct data placement and RDMA capabilities using a generic RNIC. In summary, iSCSI/iSER protocol stack is designed to enable scaling to high speeds by relying on a generic data placement

Deleted: '

Deleted: August

process and RDMA technologies and products, which enable direct data placement of both in-order and out-of-order data.

This document describes iSER as a protocol extension to iSCSI, both for convenience of description and also because it is true in a very strict protocol sense. However, it is to be noted that iSER is in reality extending the connectivity of the iSCSI protocol defined in [iSCSI], and the name iSER reflects this reality.

When the iSCSI protocol defined by [iSCSI] (i.e. without the iSER enhancements) is intended in the rest of the document, the term "traditional iSCSI" is used to make the intention clear.

## 2.2 Architectural Goals

This section summarizes the architectural goals that guided the design of iSER.

1. Provide iWARP-based data transfer model for iSCSI that enables direct in order or out of order data placement of SCSI data into pre-allocated SCSI buffers while maintaining in order data delivery.
2. Not require any major changes to SCSI Architecture Model (SAM/SAM-2/SAM-3) and SCSI command set standards.
3. Utilize existing traditional iSCSI infrastructure (sometimes referred to as "iSCSI ecosystem") including but not limited to MIB, bootstrapping, negotiation, naming & discovery, and security.
4. Not require iSCSI full feature phase interoperability between an end node operating in traditional iSCSI mode, and an end node operating in iSER-assisted mode.
5. Allow initiator and target implementations that utilize generic RNICs and implement iSCSI and iSER in software (not require iSCSI or iSER specific assists in the iWARP protocol suite or RNIC).
6. Require full and only generic iWARP functionality at both the initiator and the target.
7. Require a session to operate in the traditional iSCSI data transfer mode if iSER is not supported by either the initiator or the target.
8. Implement a light weight Datamover protocol for iSCSI with minimal state maintenance.

## 2.3 Protocol Overview

Consistent with the architectural goals stated in section 2.2, the iSER protocol does not require changes in the iSCSI ecosystem or any related SCSI specifications. iSER protocol defines the mapping of iSCSI PDUs to RDMAP Messages in such a way that it is entirely feasible to realize iSCSI/iSER implementations that are based on generic RNICS. The iSER protocol layer requires minimal state maintenance to assist an iSCSI full feature phase connection, besides being oblivious to the notion of an iSCSI session. The crucial protocol aspects of iSER may be summarized thus:

1. iSER-assisted mode is negotiated during the iSCSI login for each session, and an entire iSCSI session MUST operate in one mode (i.e. one connection in the session cannot operate in iSER-assisted mode while a different connection of the same session is already in full feature mode in the traditional iSCSI mode).
2. Once in iSER-assisted mode, all iSCSI interactions on that connection use RDMAP Messages.
3. A Send Message Type is used for carrying an iSCSI control-type PDU preceded by an iSER header. See section 7.2 for more details on iSCSI control-type PDUs.
4. RDMA Write, RDMA Read Request, and RDMA Read Response Messages are used for carrying control and all data information associated with the iSCSI data-type PDUs. See section 7.1 for more details on iSCSI data-type PDUs.
5. Target drives all data transfer (with the exception of iSCSI unsolicited data) for SCSI writes and SCSI reads, by issuing RDMA Read Requests and RDMA Writes respectively.
6. The iWARP protocol suite guarantees data integrity. (For TCP, iWARP uses a CRC-enhanced framing layer on TCP). For this reason, iSCSI header and data digests are negotiated to "None" for iSCSI/iSER sessions.
7. The iSCSI error recovery hierarchy defined by [iSCSI] is fully supported by iSER.
8. iSER requires no changes to iSCSI authentication, security, and text mode negotiation mechanisms.

Note that traditional iSCSI implementations may have to be adapted to employ iSER. It is expected that the adaptation when required is

Deleted: August

likely to be centered around the upper layer interface requirements of iSER (section 3).

## 2.4 RDMA services and iSER

iSER is designed to work with software and/or hardware protocol stacks providing the protocol services defined in [RDMAP]. The following subsections describe the key protocol elements of RDMAP that iSER relies on.

### 2.4.1 STag

An STag is the RNIC-unique identifier of an I/O Buffer that the iSER Layer Advertises to the remote iSCSI/iSER node in order to complete a SCSI I/O.

In iSER, Advertisement is the act of informing the target by the initiator that an I/O Buffer is available at the initiator for RDMA Read or RDMA Write access by the target. The initiator Advertises the I/O Buffer by including the STag in the header of an iSER Message containing the SCSI Command PDU to the target. The base Tagged Offset is not explicitly specified, but the target must always assume it as zero. The buffer length is as specified in the SCSI Command PDU.

The iSER Layer at the initiator Advertises the STag for the I/O Buffer of each SCSI I/O to the iSER Layer at the target in the iSER header of the SendSE Message containing the SCSI Command PDU, unless the I/O can be completely satisfied by unsolicited data alone.

The iSER Layer at the target provides the STag for the I/O Buffer that is the Data Sink of an RDMA Read Operation (section 2.4.4) to the RDMAP layer on the initiator node - i.e. this is completely transparent to the iSER Layer at the initiator.

The iSER protocol is defined so that the Advertised STag is automatically invalidated upon a normal completion of the associated task. This automatic invalidation is realized via the SendInvSE Message carrying the SCSI Response PDU. There are two exceptions to this automatic invalidation - bidirectional commands, and abnormal completion of a command. The iSER Layer at the initiator is required to explicitly invalidate the STag in these cases, in addition to sanity checking the automatic invalidation even when that does happen.

#### 2.4.2 Send

Send is the RDMA Operation that is not addressed to an Advertised buffer by the sending side, and thus uses Untagged buffers on the receiving side.

The iSER Layer at the initiator uses the Send Operation to transmit any iSCSI control-type PDU to the target. As an example, the initiator uses Send Operations to transfer iSER Messages containing SCSI Command PDUs to the iSER Layer at the target.

An iSER layer at the target uses the Send Operation to transmit any iSCSI control-type PDU to the initiator. As an example, the target uses Send Operations to transfer iSER Messages containing SCSI Response PDUs to the iSER Layer at the initiator.

#### 2.4.3 RDMA Write

RDMA Write is the RDMA Operation that is used to place data into an Advertised buffer on the receiving side. The sending side addresses the Message using an STag and a Tagged Offset that are valid on the Data Sink.

The iSER Layer at the target uses the RDMA Write Operation to transfer the contents of a local I/O Buffer to an Advertised I/O Buffer at the initiator. The iSER Layer at the target uses the RDMA Write to transfer whole or part of the data required to complete a SCSI Read command.

The iSER Layer at the initiator does not employ RDMA Writes.

#### 2.4.4 RDMA Read

RDMA Read is the RDMA Operation that is used to retrieve data from an Advertised buffer on a remote node. The sending side of the RDMA Read Request addresses the Message using an STag and a Tagged Offset that are valid on the Data Source in addition to providing a valid local STag and Tagged Offset that identify the Data Sink.

The iSER Layer at the target uses the RDMA Read Operation to transfer the contents of an Advertised I/O Buffer at the initiator to a local I/O Buffer at the target. The iSER Layer at the target uses the RDMA Read to fetch whole or part of the data required to complete a SCSI Write.

The iSER Layer at the initiator does not employ RDMA Reads.

## 2.5 SCSI Read Overview

The iSER Layer at the initiator receives the SCSI Command PDU from the iSCSI Layer. The iSER Layer at the initiator generates an STag for the I/O Buffer of the SCSI Read and Advertises the buffer by including the STag as part of the iSER header for the PDU. The iSER Message is transferred to the target using a SendSE Message.

The iSER Layer at the target uses one or more RDMA Writes to transfer the data required to complete the SCSI Read.

The iSER Layer at the target uses a SendInvSE Message to transfer the SCSI Response PDU back to the iSER Layer at the initiator. The iSER Layer at the initiator notifies the iSCSI Layer of the availability of the SCSI Response PDU.

## 2.6 SCSI Write Overview

The iSER Layer at the initiator receives the SCSI Command PDU from the iSCSI Layer. If solicited data transfer is involved, the iSER Layer at the initiator generates an STag for the I/O Buffer of the SCSI Write and Advertises the buffer by including the STag as part of the iSER header for the PDU. The iSER Message is transferred to the target using a SendSE Message.

The iSER Layer at the initiator may optionally send one or more non-immediate unsolicited data PDUs to the target using Send Message Types.

If solicited data transfer is involved, the iSER Layer at the target uses one or more RDMA Reads to transfer the data required to complete the SCSI Write.

The iSER Layer at the target uses a SendInvSE Message to transfer the SCSI Response PDU back to the iSER Layer at the initiator. The iSER Layer at the initiator notifies the iSCSI Layer of the availability of the SCSI Response PDU.

## 2.7 iSCSI/iSER Layering

iSCSI Extensions for RDMA (iSER) is layered between the iSCSI layer and the RDMAP layer. Figure 1 shows an example of the relationship between SCSI, iSCSI, iSER, RDMAP, and the rest of the iWARP stack when the transport layer is TCP.

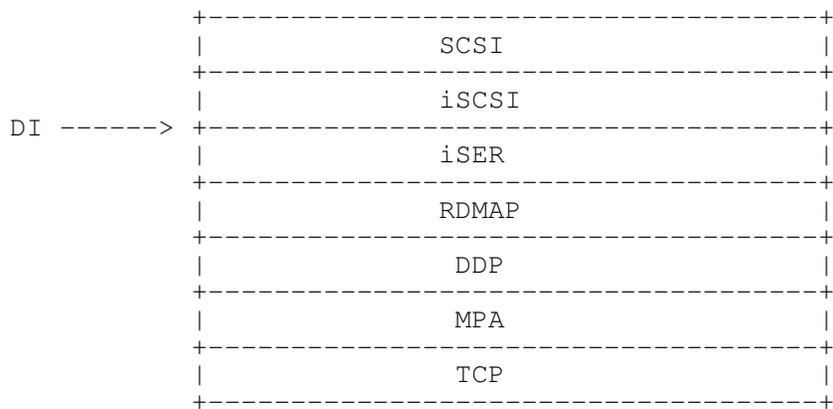


Figure 1 Example of iSCSI/iSER Layering in Full Feature Mode

### 3 Upper Layer Interface Requirements

This section discusses the upper layer interface requirements in the form of an abstract model of the required interactions between the iSCSI Layer and the iSER Layer. The abstract model used here is derived from the architectural model described in [DA].

The interface requirements are specified by Operational Primitives. An Operational Primitive is an abstract functional interface procedure between the iSCSI Layer and the iSER Layer that requests one layer to perform a specific action on behalf of the other layer or notifies the other layer of some event. Whenever an Operational Primitive is invoked, the Connection\_Handle qualifier is used to identify a particular iSCSI connection. For some Operational Primitives, a Data\_Descriptor is used to identify the iSCSI/SCSI data buffer associated with the requested or completed operation.

The abstract model and Operational Primitives defined in this section are for the ease of description of iSER protocol. In the rest of the iSER specification, the compliance statements related to the use of these Operational Primitives are only for the purpose of the required interactions between the iSCSI Layer and the iSER Layer. Note that the compliance statements related to Operational Primitives in the rest of this specification only mandate functional equivalence on implementations, but do not put any requirements on the implementation specifics of the interface between the iSCSI Layer and the iSER Layer.

#### 3.1 Operational Primitives offered by iSER

The iSER protocol layer is required to support the following Operational Primitives to be used by the iSCSI protocol layer.

Deleted: MUST

##### 3.1.1 Send\_Control

Input qualifiers: Connection\_Handle, BHS and AHS (if any) of the iSCSI PDU, iSCSI PDU specific qualifiers

Return results: Not specified

This is used by the iSCSI Layers at the initiator and the target to request the outbound transfer of an iSCSI control-type PDU (see section 7.2). For details on iSCSI PDU specific qualifiers, see section 7.3. The iSCSI Layer can only invoke the Send\_Control Operational Primitive when the connection is in iSER-assisted mode.

Deleted: August

### 3.1.2 Put\_Data

Input qualifiers: Connection\_Handle, content of a SCSI Data-in PDU header, Data\_Descriptor, Notify\_Enable

Return results: Not specified

This is used by the iSCSI Layer at the target to request the outbound transfer of data for a SCSI Data-in PDU from the buffer identified by the Data\_Descriptor qualifier. The iSCSI Layer can only invoke the Put\_Data Operational Primitive when the connection is in iSER-assisted mode.

The Notify\_Enable qualifier is used to indicate to the iSER Layer whether or not it should generate an eventual local completion notification to the iSCSI Layer. See section 3.2.2 on Data\_Completion\_Notify for details.

### 3.1.3 Get\_Data

Input qualifiers: Connection\_Handle, content of an R2T PDU, Data\_Descriptor, Notify\_Enable

Return results: Not specified

This used by the iSCSI Layer at the target to request the inbound transfer of solicited data requested by an R2T PDU into the buffer identified by the Data\_Descriptor qualifier. The iSCSI Layer can only invoke the Get\_Data Operational Primitive when the connection is in iSER-assisted mode.

The Notify\_Enable qualifier is used to indicate to the iSER Layer whether or not it should generate the eventual local completion notification to the iSCSI Layer. See section 3.2.2 on Data\_Completion\_Notify for details.

### 3.1.4 Allocate\_Connection\_Resources

Input qualifiers: Connection\_Handle, Resource\_Descriptor (optional)

Return results: Status

This is used by the iSCSI Layers at the initiator and the target to request the allocation of all connection resources necessary to support iWARP for an operational iSCSI/iSER connection. The iSCSI Layer may optionally specify the implementation-specific resource

Deleted: August

requirements for the iSCSI connection using the Resource\_Descriptor qualifier.

A return result of Status=success means the invocation succeeded, and a return result of Status=failure means that the invocation failed. If the invocation is for a Connection\_Handle for which an earlier invocation succeeded, the request will be ignored by the iSER Layer and the result of Status=success will be returned. Only one Allocate\_Connection\_Resources Operational Primitive invocation can be outstanding for a given Connection\_Handle at any time.

### 3.1.5 Deallocate\_Connection\_Resources

Input qualifiers: Connection\_Handle

Return results: Not specified

This is used by the iSCSI Layers at the initiator and the target to request the deallocation of all connection resources that were allocated earlier as a result of a successful invocation of the Allocate\_Connection\_Resources Operational Primitive.

### 3.1.6 Enable\_Datamover

Input qualifiers: Connection\_Handle,  
Transport\_Connection\_Descriptor, Final\_Login\_Response\_PDU  
(optional)

Return results: Not specified

This is used by the iSCSI Layers at the initiator and the target to request that a specified iSCSI connection be transitioned to iSER-assisted mode. The Transport\_Connection\_Descriptor qualifier is used to identify the specific connection associated with the Connection\_Handle. The iSCSI layer can only invoke the Enable\_Datamover Operational Primitive when there was a corresponding prior resource allocation.

The Final\_Login\_Response\_PDU input qualifier is applicable only for a target, and contains the final Login Response PDU that concludes the iSCSI Login phase and which must be sent as a byte stream as expected by the iSCSI Layer at the initiator. When this qualifier is used, the iSER Layer at the target MUST transmit this final Login Response PDU before transitioning to iSER-assisted mode.

3.1.7 Connection\_Terminate

Input qualifiers: Connection\_Handle

Return results: Not specified

This is used by the iSCSI Layers at the initiator and the target to request that a specified iSCSI/iSER connection be terminated and all associated connection and task resources be freed. When this Operational Primitive invocation returns to the iSCSI layer, the iSCSI layer may assume full ownership of all iSCSI-level resources, e.g. I/O Buffers, associated with the connection.

3.1.8 Notice\_Key\_Values

Input qualifiers: Connection\_Handle, number of keys, list of Key-Value pairs

Return results: Not specified

This is used by the iSCSI Layers at the initiator and the target to request the iSER Layer to take note of the specified Key-Value pairs which were negotiated by the iSCSI peers for the connection.

3.1.9 Deallocate\_Task\_Resources

Input qualifiers: Connection\_Handle, ITT

Return results: Not specified

This is used by the iSCSI Layers at the initiator and the target to request the deallocation of all iWARP-specific resources allocated by the iSER Layer for the task identified by the ITT qualifier. This Operational Primitive is only used for tasks that did not conclude with a SCSI Response PDU, and is not used when a SCSI Response PDU normally concludes a task. iWARP-specific task resources are deallocated by the iSER Layer when a SCSI Response PDU normally concludes a task, even if the SCSI Status was not success.

3.2 Operational Primitives used by iSER

The iSER layer uses the following Operational Primitives offered by the iSCSI protocol layer when the connection is in iSER-assisted mode.

Deleted: MUST

Deleted: August

### 3.2.1 Control\_Notify

Input qualifiers: Connection\_Handle, an iSCSI control-type PDU

Return results: Not specified

This is used by the iSER Layers at the initiator and the target to notify the iSCSI Layer of the availability of an inbound iSCSI control-type PDU. A PDU is described as "available" to the iSCSI Layer when the iSER Layer notifies the iSCSI Layer of the reception of that inbound PDU, along with an implementation-specific indication as to where the received PDU is.

### 3.2.2 Data\_Completion\_Notify

Input qualifiers: Connection\_Handle, ITT, SN

Return results: Not specified

This is used by the iSER Layer to notify the iSCSI Layer of the completion of outbound data transfer that was requested by the iSCSI Layer only if the invocation of the Put\_Data Operational Primitive (see section 3.1.2) was qualified with Notify\_Enable set. SN refers to the DataSN associated with the SCSI Data-In PDU.

This is used by the iSER Layer to notify the iSCSI Layer of the completion of inbound data transfer that was requested by the iSCSI Layer only if the invocation of the Get\_Data Operational Primitive (see section 3.1.3) was qualified with Notify\_Enable set. SN refers to the R2TSN associated with the R2T PDU.

### 3.2.3 Data\_ACK\_Notify

Input qualifier: Connection\_Handle, ITT, DataSN

Return results: Not specified

This is used by the iSER Layer at the target to notify the iSCSI Layer of the arrival of the data acknowledgement (as defined in [iSCSI]) requested earlier by the iSCSI Layer for the outbound data transfer via an invocation of the Put\_Data Operational Primitive where the A-bit in the SCSI Data-in PDU is set to 1. See section 7.3.5. DataSN refers to the expected DataSN of the next SCSI Data-in PDU which immediately follows the SCSI Data-in PDU with the A-bit set to which this notification corresponds, with semantics as defined in [iSCSI].

### 3.2.4 Connection\_Terminate\_Notify

Input qualifiers: Connection\_Handle

Return results: Not specified

This is used by the iSER Layers at the initiator and the target to notify the iSCSI Layer of the unsolicited termination or failure of an iSCSI/iSER connection. The iSER Layer MUST deallocate the connection and task resources associated with the terminated connection before the invocation of this Operational Primitive. Note that the Connection\_Terminate\_Notify Operational Primitive is not invoked when the termination of the connection was earlier requested by the local iSCSI Layer.

### 3.3 iSCSI Protocol Usage Requirements

An iSER-assisted iSCSI protocol layer should satisfy the following protocol usage requirements from the iSER protocol:

1. The iSCSI Layers at both the initiator and the target MUST negotiate the RDMAExtensions key (see section 6.3) to "Yes" on the leading connection. If the invocation of the Allocate\_Connection\_Resources Operational Primitive to the iSER layer fails after this key is negotiated to "Yes", the iSCSI layer MUST fail the iSCSI Login process or terminate the connection as appropriate. See section 10.1.3.1 and 0 for details.
2. The iSCSI Layer at the initiator MUST set ExpDataSN = 0 in Task Management Function Requests for Task Allegiance Reassignment for read/bidirectional commands, so as to cause the target to send all unacknowledged read data.
3. The iSCSI Layer at the target MUST always return the SCSI status in a separate SCSI Response PDU for read commands, i.e., there MUST NOT be a "phase collapse" in concluding a SCSI Read Command.
4. The iSCSI Layers at both the initiator and the target MUST successfully negotiate the InitiatorRecvDataSegmentLength key (see section 6.5) for each iSER-assisted connection, and follow its defined semantics.
5. The iSCSI Layer at both the initiator and the target MUST successfully negotiate the TargetRecvDataSegmentLength key (see

Deleted: 10.1.3.2

Deleted: August

section 6.4) for each iSER-assisted connection, and follow its defined semantics.

6. The iSCSI Layer at the initiator SHOULD NOT issue proactive (based on time-outs) SNACKs for PDUs that it presumes are lost.

## 4 Lower Layer Interface Requirements

### 4.1 Interactions with the iWARP Layer

The iSER protocol layer is layered on top of the iWARP protocol stack (see Figure 1) and the following are the key features that are assumed to be supported by iWARP:

- \* The RDMAP layer supports all basic RDMAP operations, including RDMA Write Operation, RDMA Read Operation, Send Operation, Send with Invalidate Operation, Send with Solicited Event Operation, Send with Solicited Event & Invalidate Operation, and Terminate Operation.
- \* The RDMAP/DDP layers provide reliable, in-order message delivery and direct data placement.
- \* The RDMAP layer encapsulates a single iSER Message into a single RDMAP message on the Data Source side. The RDMAP layer decapsulates the iSER Message before delivering it to the iSER Layer on the Data Sink side.
- \* When the iSER Layer provides the STag to be remotely invalidated to the RDMAP layer for a SendInvSE Message, the RDMAP layer uses this STag as the STag to be invalidated in the SendInvSE Message.
- \* The RDMAP layer uses the STag and Tagged Offset provided by the iSER Layer for the RDMA Write and RDMA Read Request Messages.
- \* When the RDMAP layer delivers the content of an RDMA Send Message Type to the iSER Layer, the RDMAP layer provides the length of the RDMA Send message. This ensures that the iSER Layer does not have to carry a length field in the iSER header.
- \* When the RDMAP layer delivers the SendSE or SendInvSE Message to the iSER Layer, it notifies the iSER Layer with the mechanism provided on that interface.
- \* When the RDMAP layer delivers a SendInvSE Message to the iSER Layer, it passes the value of the STag that was invalidated.
- \* The RDMAP layer propagates all status and error indications to the iSER Layer.
- \* The iWARP implementation supports the enabling of the iWARP mode after Connection establishment.

Deleted: August

- \* Whenever the iSER Layer terminates the RDMAP Stream, the RDMAP layer terminates the associated Connection.

#### 4.2 Interactions with the Transport Layer

The iSER Layer does not interface with the transport layer (e.g., TCP) directly. During Connection setup, the iSCSI Layer is responsible for setting up the Connection. If the login is successful, the iSCSI Layer invokes the `Enable_Datamover` Operational Primitive to request the iSER Layer to transition to the iSER-assisted mode for that iSCSI connection. See section 5.1 on iSCSI/iSER Connection Setup. After transitioning to iSER-assisted mode, the iWARP layer is responsible for maintaining the Connection and reports to the iSER Layer of any Connection failures.

## 5 Connection Setup and Termination

## 5.1 iSCSI/iSER Connection Setup

During connection setup, the iSCSI Layer at the initiator is responsible for establishing a connection with the target. After the connection is established, the iSCSI Layers at the initiator and the target enter the Login Phase using the same rules as outlined in [iSCSI]. Transition to iSER-assisted mode occurs when the connection transitions into the iSCSI full feature phase following a successful login negotiation between the initiator and the target in which iSER-assisted mode is negotiated and the connection resources necessary to support iWARP have been allocated at both the initiator and the target.

iSER-assisted mode MUST be enabled only if it is negotiated on the leading connection during the LoginOperationalNegotiation Stage of the iSCSI Login Phase. iSER-assisted mode is negotiated using the RDMAExtensions=<boolean-value> key. Both the initiator and the target MUST exchange the RDMAExtensions key with the value set to "Yes" to enable iSER-assisted mode. If both the initiator and the target fail to negotiate the RDMAExtensions key set to "Yes", then the connection MUST continue with the login semantics as defined in [iSCSI].

iSER-assisted mode is defined for a Normal session only and the RDMAExtensions key MUST NOT be negotiated for a Discovery session.

An iSER enabled node is not required to initiate the RDMAExtensions key exchange if its preference is for the traditional iSCSI mode. The RDMAExtensions key, if offered, MUST be sent in the first available Login Response or Login Request PDU in the LoginOperationalNegotiation stage. This is due to the fact that the value of some login parameters might depend on whether iSER-assisted mode is enabled or not.

iSER-assisted mode is a session-wide attribute. If both the initiator and the target negotiated RDMAExtensions="Yes" on the leading connection of a session, then all subsequent connections of the same session MUST enable iSER-assisted mode without having to exchange RDMAExtensions key during the iSCSI Login Phase. Conversely, if both the initiator and the target failed to negotiate RDMAExtensions to "Yes" on the leading connection of a session, then the RDMAExtensions key MUST NOT be negotiated further on any additional subsequent connection of the session.

When the RDMAExtensions key is negotiated to "Yes", the HeaderDigest and the DataDigest keys MUST be negotiated to "None" on all iSCSI/iSER connections participating in that iSCSI session. This is because, for an iSCSI/iSER connection, the iWARP protocol suite provides a CRC32c-based error detection for all iWARP Messages. Furthermore, all SCSI Read data are sent using RDMA Write Messages instead of the SCSI Data-in PDUs, and all solicited SCSI write data are sent using RDMA Read Response Messages instead of the SCSI Data-out PDUs. HeaderDigest and DataDigest which apply to iSCSI PDUs would not be appropriate for RDMA Read and RDMA Write operations used with iSER.

#### 5.1.1 Initiator Behavior

If the outcome of the iSCSI negotiation is to enable iSER-assisted mode, then on the initiator side, prior to sending the Login Request with the T (Transit) bit set to 1 and the NSG (Next Stage) field set to FullFeaturePhase, the iSCSI Layer MUST request the iSER Layer to allocate the connection resources necessary to support iWARP by invoking the Allocate\_Connection\_Resources Operational Primitive. The connection resources required are defined by implementation and are outside the scope of this specification. The iSCSI Layer may invoke the Notice\_Key\_Values Operational Primitive before invoking the Allocate\_Connection\_Resources Operational Primitive to request the iSER Layer to take note of the negotiated values of the iSCSI keys for the Connection. The specific keys to be passed in as input qualifiers are implementation dependent. These may include, but not limited to, MaxOutstandingR2T, ErrorRecoveryLevel, etc.

Deleted: invoke the Allocate\_Connection\_Resources Operational Primitive to

Among the connection resources allocated at the initiator is the Inbound RDMA Read Queue Depth (IRD). As described in section 9.5.1, R2Ts are transformed by the target into RDMA Read operations. IRD limits the maximum number of simultaneously incoming outstanding RDMA Read Requests per an RDMAP Stream from the target to the initiator. The required value of IRD is outside the scope of the iSER specification. The iSER Layer at the initiator MUST set IRD to 1 or higher if R2Ts are to be used in the connection. However, the iSER Layer at the initiator MAY set IRD to 0 based on implementation configuration which indicates that no R2Ts will be used on that connection. Initially, the iSER-IRD value at the initiator SHOULD be set to the IRD value at the initiator and MUST NOT be more than the IRD value.

On the other hand, the Outbound RDMA Read Queue Depth (ORD) MAY be set to 0 since the iSER Layer at the initiator does not issue RDMA Read Requests to the target.

Deleted: August

If the iSCSI Layer invokes the Allocate\_Connection\_Resources Operational Primitive after the connection resources necessary to support iWARP are known through iSCSI negotiation, then only the connection resources required are allocated. However, failure to allocate the requested connection resources locally results in a login failure and its handling is described in section 10.1.3.1.

If the iSCSI Layer invokes the Allocate\_Connection\_Resources Operational Primitive before the iSCSI Login Phase, it avoids the potential login failure due to failure to allocate the requested connection resources. However, since the connection resources necessary to support iWARP are not yet known, the connection resources to be allocated must equal or exceed whatever is required as determined in the later iSCSI negotiation. As a result, resources are allocated but unused if the connection resources required are less than the allocated ones unless the iSCSI Layer frees up the unused resources. In the event that the iSCSI login fails, or if the connection is to remain in traditional iSCSI mode, the connection resources to support iWARP MUST be deallocated as described in section 10.1.4.6.

If the iSER Layer at the initiator is successful in allocating the connection resources necessary to support iWARP, the following events MUST occur in the specified sequence:

1. The iSER Layer MUST return a success status to the iSCSI Layer in response to the Allocate\_Connection\_Resources Operational Primitive.
2. After the target returns the Login Response with the T bit set to 1 and the NSG field set to FullFeaturePhase, and a status class of 0 (Success), the iSCSI Layer MUST request the iSER Layer to transition to iSER-assisted mode by invoking the Enable\_Datamover Operational Primitive. (See section 10.1.4.6 for the case when the status class is not Success.) The following qualifiers are used with the Operational Primitive:
  - a. Connection\_Handle that identifies the iSCSI connection.
  - b. Transport\_Connection\_Descriptor which identifies the specific transport connection associated with the Connection\_Handle.
3. The iSER Layer MUST enable iWARP and transition the connection to iSER-assisted mode.

Deleted: invoke the Enable\_Datamover Operational Primitive with the following qualifiers to

Deleted: August

4. The iSER Layer MUST send the iSER Hello Message as the first RDMAP message. See Section 5.1.3 on iSER Hello Exchange.

If an iSCSI implementation wants to ensure that the resources necessary to support iWARP are allocated and therefore invokes the Allocate\_Connection\_Resources Operational Primitive prior to initiating the iSCSI negotiation, then it is responsible for managing the resource deallocation if the iSCSI login fails or if the negotiated values of the iSCSI keys are different than the allocated value.

5.1.2 Target Behavior

If the outcome of the iSCSI negotiation is to enable iSER-assisted mode, then on the target side, prior to sending the Login Response with the T (Transit) bit set to 1 and the NSG (Next Stage) field set to FullFeaturePhase, the iSCSI Layer MUST request the iSER Layer to allocate the resources necessary to support iWARP by invoking the Allocate\_Connection\_Resources Operational Primitive. The connection resources required are defined by implementation and are outside the scope of this specification. Optionally, the iSCSI Layer may invoke the Notice\_Key\_Values Operational Primitive before invoking the Allocate\_Connection\_Resources Operational Primitive to request the iSER Layer to take note of the negotiated values of the iSCSI keys for the Connection. The specific keys to be passed in as input qualifiers are implementation dependent. These may include, but not limited to, MaxOutstandingR2T, ErrorRecoveryLevel, etc.

Deleted: invoke the Allocate\_Connection\_Resources Operational Primitive to

Among the connection resources allocated at the target is the Outbound RDMA Read Queue Depth (ORD). As described in section 9.5.1, R2Ts are transformed by the target into RDMA Read operations. The ORD limits the maximum number of simultaneously outstanding RDMA Read Requests per RDMAP Stream from the target to the initiator. Initially, the iSER-ORD value at the target SHOULD be set to the ORD value at the target.

On the other hand, the IRD at the target MAY be set to 0 since the iSER Layer at the target does not expect RDMA Read Requests to be issued by the initiator.

If the iSCSI Layer invokes the Allocate\_Connection\_Resources Operational Primitive after the connection resources necessary to support iWARP are known through iSCSI negotiation, then only the connection resources required are allocated. However, failure to allocate the requested connection resources locally results in a login failure and its handling is described in section 10.1.3.1.

Deleted: August

If the iSCSI Layer invokes the Allocate\_Connection\_Resources Operational Primitive before the iSCSI Login Phase, it avoids the potential login failure due to failure to allocate the requested connection resources. However, since the connection resources necessary to support iWARP are not yet known, the connection resources to be allocated must equal or exceed whatever is required as determined in the later iSCSI negotiation. As a result, resources are allocated but unused if the connection resources required are less than the allocated ones unless the iSCSI Layer frees up the unused resources. In the event that the iSCSI login fails, or if the connection is to remain in traditional iSCSI mode, the connection resources to support iWARP MUST be deallocated as described in section 10.1.4.6.

If the iSER Layer at the target is successful in allocating the connection resources necessary to support iWARP, the following events MUST occur in the specified sequence:

1. The iSER Layer MUST return a success status to the iSCSI Layer in response to the Allocate\_Connection\_Resources Operational Primitive.
2. The iSCSI Layer MUST request the iSER Layer to transition to iSER-assisted mode by invoking the Enable\_Datamover Operational Primitive. The following qualifiers are used with the Operational Primitive:
  - a. Connection\_Handle that identifies the iSCSI connection.
  - b. Transport\_Connection\_Descriptor which identifies the specific transport connection associated with the Connection\_Handle.
  - c. The final transport layer (e.g. TCP) message containing the Login Response with the T bit set to 1 and the NSG field set to FullFeaturePhase
3. The iSER Layer MUST send the final SCSI Login Response PDU in byte stream mode to conclude the iSCSI Login Phase.
4. After sending the final SCSI Login Response PDU in byte stream mode, the iSER Layer MUST enable iWARP and transition the connection to iSER-assisted mode.
5. After receiving the iSER Hello Message from the initiator, the iSER Layer MUST respond with the iSER HelloReply Message to be

Deleted: invoke the Enable\_Datamover Operational Primitive with the following qualifiers to

Deleted: August

sent as the first RDMA Message. See section 5.1.3 on iSER Hello Exchange for more details.

Note: In the above sequence, the operations as described in the bullets 3 and 4 must be performed atomically. Failure to do this may result in race conditions.

### 5.1.3 iSER Hello Exchange

After the connection transitions into the iSER-assisted mode, the first RDMA Message sent by the iSER Layer at the initiator to the target MUST be the iSER Hello Message. The iSER Hello Message is used by the iSER Layer at the initiator to declare iSER parameters to the target. See section 9.3 on iSER Header Format for iSER Hello Message.

In response to the iSER Hello Message, the iSER Layer at the target MUST return the iSER HelloReply Message as the first RDMA Message sent by the target. The iSER HelloReply Message is used by the iSER Layer at the target to declare iSER parameters to the initiator. See section 9.4 on iSER Header Format for iSER HelloReply Message.

In the iSER Hello Message, the iSER Layer at the initiator declares the iSER-IRD value to the target.

Upon receiving the iSER Hello Message, the iSER Layer at the target MUST set the iSER-ORD value to the minimum of the iSER-ORD value at the target and the iSER-IRD value declared by the initiator. The iSER Layer at the target MAY adjust (lower) its ORD value to match the iSER-ORD value if the iSER-ORD value is smaller than the ORD value at the target in order to free up the unused resources.

In the iSER HelloReply Message, the iSER Layer at the target declares the iSER-ORD value to the initiator.

Upon receiving the iSER HelloReply Message, the iSER Layer at the initiator MAY adjust (lower) its IRD value to match the iSER-ORD value in order to free up the unused resources, if the iSER-ORD value declared by the target is smaller than the iSER-IRD value declared by the initiator.

It is an iSER level negotiation failure if the iSER parameters declared in the iSER Hello Message by the initiator is unacceptable to the target. See section [10.1.3.2](#) on the handling of the error situation.

Deleted: 10.1.3.3

Deleted: August

5.2 iSCSI/iSER Connection Termination

5.2.1 Normal Connection Termination at the Initiator

The iSCSI Layer at the initiator terminates an iSCSI/iSER connection normally by invoking the Send\_Control Operational Primitive qualified with the Logout Request PDU. The iSER Layer at the initiator MUST use a SendSE Message to send the Logout Request PDU to the target. After the iSER Layer at the initiator receives the SendSE Message containing the Logout Response PDU from the target, it MUST notify the iSCSI Layer by invoking the Control\_Notify Operational Primitive qualified with the Logout Response PDU.

After the iSCSI logout process is complete, the iSCSI layer at the target is responsible for closing the iSCSI/iSER connection as described in Section 5.2.2. After the RDMAP layer at the initiator reports that the Connection has been closed, the iSER Layer at the initiator MUST deallocate all connection ~~and~~ task resources (if any) associated with the connection, ~~and should~~ invalidate the local mapping(s) (if any) that associate the ITT(s) used on that connection to the local STag(s), ~~before notifying the iSCSI Layer by invoking the Connection\_Terminate\_Notify Operational Primitive.~~

Deleted: resources, deallocate all

Deleted: , and then

Deleted: invoke the Connection\_Terminate\_Notify Operational Primitive to

5.2.2 Normal Connection Termination at the Target

Upon receiving the SendSE Message containing the Logout Request PDU, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the Control\_Notify Operational Primitive qualified with the Logout Request PDU. The iSCSI Layer completes the logout process by invoking the Send\_Control Operational Primitive qualified with the Logout Response PDU. The iSER Layer at the target MUST use a SendSE Message to send the Logout Response PDU to the initiator. After the iSCSI logout process is complete, the iSCSI Layer at the target MUST ~~request the iSER Layer at the target to terminate the RDMAP Stream by invoking the~~ Connection\_Terminate\_Notify Operational Primitive.

Deleted: invoke the Connection\_Terminate Operational Primitive to

As part of the termination process, the RDMAP layer MUST close the Connection. When the RDMAP layer notifies the iSER Layer after the RDMAP stream and the associated Connection are terminated, the iSER Layer MUST deallocate all connection ~~and~~ task resources (if any) associated with the connection, and ~~should~~ invalidate the local and remote mapping(s) (if any) that associate the ITT(s) used on that connection to the local STag(s) and the Advertised STag(s) respectively.

Deleted: resources, deallocate all

Deleted: August

5.2.3 Termination without Logout Request/Response PDUs

5.2.3.1 Connection Termination Initiated by the iSCSI Layer

The Connection\_Terminate Operational Primitive MAY be invoked by the iSCSI Layer to request the iSER Layer to terminate the RDMAP Stream without having previously exchanged the Logout Request and Logout Response PDUs between the two iSCSI/iSER nodes. As part of the termination process, the RDMAP layer will close the Connection. When the RDMAP layer notifies the iSER Layer after the RDMAP stream and the associated Connection are terminated, the iSER Layer MUST perform the following actions.

If the Connection\_Terminate Operational Primitive is invoked by the iSCSI Layer at the target, then the iSER Layer at the target MUST deallocate all connection and task resources (if any) associated with the connection, and should invalidate the local and remote mappings (if any) that associate the ITT(s) used on the connection to the local STag(s) and the Advertised STag(s) respectively.

Deleted: resources, deallocate all

If the Connection\_Terminate Operational Primitive is invoked by the iSCSI Layer at the initiator, then the iSER Layer at the initiator MUST deallocate all connection and task resources (if any) associated with the connection, and should invalidate the local mapping(s) (if any) that associate the ITT(s) used on the connection to the local STag(s).

Deleted: resources, deallocate all

5.2.3.2 Connection Termination Notification to the iSCSI Layer

If the iSCSI/iSER connection is terminated without the invocation of Connection\_Terminate from the iSCSI Layer, the iSER Layer MUST notify the iSCSI Layer that the iSCSI/iSER connection has been terminated by invoking the Connection\_Terminate\_Notify Operational Primitive.

Deleted: invoke the Connection\_Terminate\_Notify Operational Primitive to

Prior to invoking Connection\_Terminate\_Notify, the iSER Layer at the target MUST deallocate all connection and task resources (if any) associated with the connection, and should invalidate the local and remote mappings (if any) that associate the ITT(s) used on the connection to the local STag(s) and the Advertised STag(s) respectively.

Deleted: resources, deallocate all

Prior to invoking Connection\_Terminate\_Notify, the iSER Layer at the initiator MUST deallocate all connection and task resources (if any) associated with the connection, and should invalidate the local mappings (if any) that associate the ITT(s) used on the connection to the local STag(s).

Deleted: resources, deallocate all

Deleted: August

If the remote iSCSI/iSER node initiated the closing of the Connection (e.g., by sending a TCP FIN or TCP RST), the iSER Layer MUST notify the iSCSI Layer after the RDMAP layer reports that the Connection is closed by invoking the Connection\_Terminate\_Notify Operational Primitive.

**Deleted:** invoke the Connection\_Terminate\_Notify Operational Primitive to

Another example of a Connection termination without a preceding logout is when the iSCSI Layer at the initiator does an implicit logout (connection reinstatement).

**Deleted:** August

## 6 Login/Text Operational Keys

Certain iSCSI login/text operational keys have restricted usage in iSER, and additional keys are used to support the iSER protocol functionality. All other keys defined by [iSCSI] and not discussed in this section may be used on iSCSI/iSER connections with the same semantics.

### 6.1 HeaderDigest and DataDigest

Irrelevant when: RDMAExtensions=Yes

Negotiations resulting in RDMAExtensions=Yes for a session implies HeaderDigest=None and DataDigest=None for all connections in that session and overrides both the default and an explicit setting.

### 6.2 MaxRecvDataSegmentLength

For an iSCSI connection belonging to a session in which RDMAExtensions=Yes was negotiated on the leading connection of the session, MaxRecvDataSegmentLength need not be declared in the Login Phase. Instead InitiatorRecvDataSegmentLength (as described in section 6.5) and TargetRecvDataSegmentLength (as described in section 6.4) keys are negotiated. The values of the local and remote MaxRecvDataSegmentLength are derived from the InitiatorRecvDataSegmentLength and TargetRecvDataSegmentLength keys even if the MaxRecvDataSegmentLength was declared during the login phase.

In the full feature phase, the initiator MUST consider the value of its local MaxRecvDataSegmentLength (that it would have declared to the target) as having the value of InitiatorRecvDataSegmentLength, and the value of the remote MaxRecvDataSegmentLength (that would have been declared by the target) as having the value of TargetRecvDataSegmentLength. Similarly, the target MUST consider the value of its local MaxRecvDataSegmentLength (that it would have declared to the initiator) as having the value of TargetRecvDataSegmentLength, and the value of the remote MaxRecvDataSegmentLength (that would have been declared by the initiator) as having the value of InitiatorRecvDataSegmentLength.

The MaxRecvDataSegmentLength key is applicable only for iSCSI control-type PDUs.

### 6.3 RDMAExtensions

Use: LO (leading only)

Deleted: August

Senders: Initiator and Target

Scope: SW (session-wide)

RDMAExtensions=<boolean-value>

Irrelevant when: SessionType=Discovery

Default is No

Result function is AND

This key is used by the initiator and the target to negotiate the support for iSER-assisted mode. To enable the use of iSER-assisted mode, both the initiator and the target MUST exchange RDMAExtensions=Yes. iSER-assisted mode MUST NOT be used if either the initiator or the target offers RDMAExtensions=No.

An iSER-enabled node is not required to initiate the RDMAExtensions key exchange if it prefers to operate in the traditional iSCSI mode. However, if the RDMAExtensions key is to be negotiated, an initiator MUST offer the key in the first Login Request PDU in the LoginOperationalNegotiation stage of the leading connection, and a target MUST offer the key in the first Login Response PDU with which it is allowed to do so (i.e., the first Login Response PDU issued after the first Login Request PDU with the C bit set to 0) in the LoginOperationalNegotiation stage of the leading connection. In response to the offered key=value pair of RDMAExtensions=yes, an initiator MUST respond in the next Login Request PDU with which it is allowed to do so, and a target MUST respond in the next Login Response PDU with which it is allowed to do so.

Negotiating the RDMAExtensions key first enables a node to negotiate the optimal value for other keys. Certain iSCSI keys such as MaxBurstLength, MaxOutstandingR2T, ErrorRecoveryLevel, InitialR2T, ImmediateData, etc., may be negotiated differently depending on whether connection is in traditional iSCSI mode or iSER-assisted mode.

#### 6.4 TargetRecvDataSegmentLength

Use: IO (Initialize only)

Senders: Initiator and Target

Scope: CO (connection-only)

Deleted: August

Irrelevant when: RDMAExtensions=No

TargetRecvDataSegmentLength=<numerical-value-512-to-(2\*\*24-1)>

Default is 8192 bytes

Result function is minimum

This key is relevant only for the iSCSI connection of an iSCSI session if RDMAExtensions=Yes was negotiated on the leading connection of the session. It is used by the initiator and the target to negotiate the maximum size of the data segment that an initiator may send to the target in an iSCSI control-type PDU. For SCSI Command PDUs and SCSI Data-out PDUs containing non-immediate unsolicited data to be sent by the initiator, the initiator MUST send all non-Final PDUs with a data segment size of exactly TargetRecvDataSegmentLength whenever the PDUs constitute a data sequence whose size is larger than TargetRecvDataSegmentLength.

### 6.5 InitiatorRecvDataSegmentLength

Use: IO (Initialize only)

Senders: Initiator and Target

Scope: CO (connection-only)

Irrelevant when: RDMAExtensions=No

InitiatorRecvDataSegmentLength=<numerical-value-512-to-(2\*\*24-1)>

Default is 8192 bytes

Result function is minimum

This key is relevant only for the iSCSI connection of an iSCSI session if RDMAExtensions=Yes was negotiated on the leading connection of the session. It is used by the initiator and the target to negotiate the maximum size of the data segment that a target may send to the initiator in an iSCSI control-type PDU.

### 6.6 OFMarker and IFMarker

Irrelevant when: RDMAExtensions=Yes

Negotiations resulting in RDMAExtensions=Yes for a session implies OFMarker=No and IFMarker=No for all connections in that session and overrides both the default and an explicit setting.

### 6.7 MaxOutstandingUnexpectedPDUs

Use: LO (leading only), Declarative

Senders: Initiator and Target

Scope: SW (session-wide)

Irrelevant when: RDMAExtensions=No

MaxOutstandingUnexpectedPDUs=<numerical-value-from-2-to-(2\*\*32-1) | None>

Default is None

This key is used by the initiator and the target to declare the maximum number of outstanding "unexpected" control-type PDUs that it can receive. It is intended to allow the receiving side to determine the amount of buffer resources needed beyond the normal flow control mechanism available in iSCSI. An initiator or target should select a value such that it would not impose an unnecessary constraint on the iSCSI layer under normal circumstances. See sections 8.3 and 8.4 for the usage of this key.

Deleted: If the sending side fails to adhere to the declared limit as set by the receiving side, it is up to the receiving side to determine ways of handling the overrun, including dropping the connection.

Deleted: August

## 7 iSCSI PDU Considerations

When a connection is in the iSER-assisted mode, two types of message transfers are allowed between the iSCSI Layer at the initiator and the iSCSI Layer at the target. These are known as the iSCSI data-type PDUs and the iSCSI control-type PDUs and these terms are described in the following sections.

### 7.1 iSCSI Data-Type PDU

An iSCSI data-type PDU is defined as an iSCSI PDU that causes data transfer, transparent to the remote iSCSI layer, to take place between the peer iSCSI nodes in the full feature phase of an iSCSI/iSER connection. An iSCSI data-type PDU, when requested for transmission by the iSCSI Layer in the sending node, results in the data being transferred without the participation of the iSCSI Layers at the sending and the receiving nodes. This is due to the fact that the PDU itself is not delivered as-is to the iSCSI Layer in the receiving node. Instead, the data transfer operations are transformed into the appropriate RDMA operations which are handled by the RNIC. The set of iSCSI data-type PDUs consists of SCSI Data-in PDUs and R2T PDUs.

If the invocation of the Operational Primitive by the iSCSI Layer to request the iSER Layer to process an iSCSI data-type PDU is qualified with `Notify_Enable` set, then upon completing the RDMA operation, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the `Data_Completion_Notify` Operational Primitive qualified with `ITT` and `SN`. There is no data completion notification at the initiator since the RDMA operations are completely handled by the RNIC at the initiator and the iSER Layer at the initiator is not involved with the data transfer associated with iSCSI data-type PDUs.

If the invocation of the Operational Primitive by the iSCSI Layer to request the iSER Layer to process an iSCSI data-type PDU is qualified with `Notify_Enable` cleared, then upon completing the RDMA operation, the iSER Layer at the target MUST NOT notify the iSCSI Layer at the target and MUST NOT invoke the `Data_Completion_Notify` Operational Primitive.

If an operation associated with an iSCSI data-type PDU fails for any reason, the contents of the Data Sink buffers associated with the operation are considered indeterminate.

### 7.2 iSCSI Control-Type PDU

Any iSCSI PDU that is not an iSCSI data-type PDU and also not a SCSI Data-out PDU carrying solicited data is defined as an iSCSI control-type PDU. The iSCSI Layer invokes the Send\_Control Operational Primitive to request the iSER Layer to process an iSCSI control-type PDU. iSCSI control-type PDUs are transferred using RDMAP Send Message Types. Specifically, it is to be noted that SCSI Data-Out PDUs carrying unsolicited data are defined as iSCSI control-type PDUs. See section ~~on the treatment of SCSI Data-out PDUs.~~

Formatted: rdmac

When the iSER Layer receives an iSCSI control-type PDU, it MUST notify the iSCSI Layer by invoking the Control\_Notify Operational Primitive qualified with the iSCSI control-type PDU.

### 7.3 iSCSI PDUs

This section describes the handling of each of the iSCSI PDU types by the iSER Layer. The iSCSI Layer requests the iSER Layer to process the iSCSI PDU by invoking the appropriate Operational Primitive, ~~qualified with the~~ Connection\_Handle, BHS and the optional AHS of the iSCSI PDU as defined in [iSCSI]. ~~The qualifying~~ Connection\_Handle, the BHS and the AHS are not explicitly listed in the subsequent sections.

Deleted: .

Deleted: A

Deleted: MUST qualify each of these invocations. In addition

Deleted: MUST qualify each of the invocations

#### 7.3.1 SCSI Command

Type: control-type PDU

PDU-specific qualifiers (for SCSI Write or bidirectional command): ImmediateDataSize, UnsolicitedDataSize, DataDescriptorOut

PDU-specific qualifiers (for SCSI Read or bidirectional command): DataDescriptorIn

The iSER Layer at the initiator MUST send the SCSI command in a SendSE Message to the target.

For a SCSI Write or bidirectional command, the iSCSI Layer at the initiator ~~invokes~~ the Send\_Control Operational Primitive as follows:

Deleted: MUST

\* If there is immediate data to be transferred for the SCSI write or bidirectional command, the qualifier ImmediateDataSize ~~is~~ used to define the number of bytes of immediate unsolicited data to be sent with the write or bidirectional command, and the qualifier

Deleted: MUST be

Deleted: August

Deleted: February

DataDescriptorOut is used to define the initiator's I/O Buffer containing the SCSI Write data.

Deleted: MUST be

\* If there is unsolicited data to be transferred for the SCSI Write or bidirectional command, the qualifier UnsolicitedDataSize is used to define the number of bytes of immediate and non-immediate unsolicited data for the command. The iSCSI Layer will issue one or more SCSI Data-out PDUs for the non-immediate unsolicited data. See Section 7.3.4 on SCSI Data-out.

Deleted: MUST be

\* If there is solicited data to be transferred for the SCSI Write or bidirectional command, as indicated by the Expected Data Transfer Length in the SCSI Command PDU exceeding the value of UnsolicitedDataSize, the iSER Layer at the initiator MUST do the following:

a. It MUST allocate a Write STag for the I/O Buffer defined by the qualifier DataDescriptorOut. DataDescriptorOut describes the I/O buffer starting with the immediate unsolicited data (if any), followed by the non-immediate unsolicited data (if any) and solicited data. This means that the BufferOffset for the SCSI Data-out for this command is equal to the TO. This implies zero TO for this STag points to the beginning of this I/O Buffer.

b. It should establish a local mapping that associates the Initiator Task Tag (ITT) to the Write STag.

Deleted: MUST

c. It MUST Advertise the Write STag to the target by sending it as the Write STag in the iSER header of the iSER Message (the payload of the RDMA SendSE Message) containing the SCSI Write or bidirectional command PDU. See section 9.2 on iSER Header Format for iSCSI Control-Type PDU.

For a SCSI Read or bidirectional command, the iSCSI Layer at the initiator invokes the Send Control Operational Primitive qualified with DataDescriptorIn which defines the initiator's I/O Buffer for receiving the SCSI Read data. The iSER Layer at the initiator MUST do the following:

Deleted: MUST

Deleted: '

a. It MUST allocate a Read STag for the I/O Buffer.

b. It should establish a local mapping that associates the Initiator Task Tag (ITT) to the Read STag.

Deleted: MUST

c. It MUST Advertise the Read STag to the target by sending it as the Read STag in the iSER header of the iSER Message (the

Deleted: August

payload of the RDMAP SendSE Message) containing the SCSI Read or bidirectional command PDU. See section 9.2 on iSER Header Format for iSCSI Control-Type PDU.

If the amount of unsolicited data to be transferred in a SCSI Command exceeds TargetRecvDataSegmentLength, then the iSCSI Layer at the initiator MUST segment the data into multiple iSCSI control-type PDUs, with the data segment length in all PDUs generated except the last one having exactly the size TargetRecvDataSegmentLength. The data segment length of the last iSCSI control-type PDU carrying the unsolicited data can be up to TargetRecvDataSegmentLength.

When the iSER Layer at the target receives the SCSI Command, it ~~should~~ establish a remote mapping that associates the ITT to the Advertised Write STag and the Read STag if present in the iSER header. The Write STag is used by the iSER Layer at the target in handling the data transfer associated with the R2T PDU(s) as described in section 7.3.6. The Read STag is used in handling the SCSI Data-in PDU(s) from the iSCSI Layer at the target as described in section 7.3.5.

Deleted: MUST

### 7.3.2 SCSI Response

Type: control-type PDU

PDU-specific qualifiers: DataDescriptorStatus

The iSCSI Layer at the target ~~invokes~~ the ~~Send Control Operational~~ Primitive qualified with DataDescriptorStatus which defines the buffer containing the sense and response information. The iSCSI Layer at the target MUST always return the SCSI status for a SCSI command in a separate SCSI Response PDU. "Phase collapse" for transferring SCSI status in a SCSI Data-in PDU MUST NOT be used. The iSER Layer at the target sends the SCSI Response PDU according to the following rules:

Deleted: MUST

- \* If no STags were Advertised by the initiator in the iSER Message containing the SCSI command PDU, then the iSER Layer at the target MUST send a SendSE Message containing the SCSI Response PDU.
- \* If the initiator Advertised a Read STag in the iSER Message containing the SCSI Command PDU, then the iSER Layer at the target MUST send a SendInvSE Message containing the SCSI Response PDU. The RDMAP header of the SendInvSE Message MUST carry the Read STag to be invalidated at the initiator.

Deleted: August

\* If the initiator Advertised only the Write STag in the iSER Message containing the SCSI command PDU, then the iSER Layer at the target MUST send a SendInvSE Message containing the SCSI Response PDU. The RDMAP header of the SendInvSE Message MUST carry the Write STag to be invalidated at the initiator.

When the iSCSI Layer at the target invokes the Send\_Control Operational Primitive to send the SCSI Response PDU, the iSER Layer at the target should invalidate the remote mapping that associates the ITT to the Advertised STag(s) before transferring the SCSI Response PDU to the initiator.

Deleted: MUST

Upon receiving the SendInvSE Message containing the SCSI Response PDU from the target, the RDMAP layer at the initiator will invalidate the STag specified in the RDMAP header. The iSER Layer at the initiator MUST ensure that the correct STag is invalidated. If both the Read and the Write STags were Advertised earlier by the initiator, then the iSER Layer at the initiator MUST explicitly invalidate the Write STag upon receiving the SendInvSE Message because the RDMAP header of the SendInvSE Message can only carry one STag (in this case the Read STag) to be invalidated.

The iSER Layer at the initiator MUST ensure the invalidation of the STag(s) used in a command before notifying the iSCSI Layer at the initiator by invoking the Control\_Notify Operational Primitive qualified with the SCSI Response. This precludes the possibility of using the STag(s) after the completion of the command thereby causing data corruption.

Deleted: invoking the Control\_Notify Operational Primitive qualified with the SCSI Response to

When the iSER Layer at the initiator receives the SendSE or the SendInvSE Message containing the SCSI Response PDU, it should invalidate the local mapping that associates the ITT to the local STag(s). The iSER Layer MUST ensure that all local STag(s) associated with the ITT are invalidated before notifying the iSCSI Layer of the SCSI Response PDU by invoking the Control\_Notify Operational Primitive qualified with the SCSI Response.

Deleted: SHOULD

Deleted: invoking the Control\_Notify Operational Primitive to

### 7.3.3 Task Management Function Request/Response

Type: control-type PDU

PDU-specific qualifiers (for TMF Request): DataDescriptorOut, DataDescriptorIn

The iSER Layer MUST use a SendSE Message to send the Task Management Function Request/Response PDU.

Deleted: August

For the Task Management Function Request with the TASK REASSIGN function, the iSER Layer at the initiator MUST do the following:

- \* It ~~uses~~ the ITT as specified in the Referenced Task Tag from the Task Management Function Request PDU to locate the existing STag(s), if any, in the local mapping(s) that associates the ITT to the local STag(s). Deleted: MUST
- \* It MUST invalidate the existing STag(s), if any, and should invalidate the local mapping(s) that associates the ITT to the local STag(s).
- \* It MUST allocate a Read STag for the I/O Buffer as defined by the qualifier DataDescriptorIn if the Send\_Control Operational Primitive invocation is qualified with DataDescriptorIn.
- \* It MUST allocate a Write STag for the I/O Buffer as defined by the qualifier DataDescriptorOut if the Send\_Control Operational Primitive invocation is qualified with DataDescriptorOut.
- \* If STags are allocated, it should establish new local mapping(s) that associate the ITT to the allocated STag(s). Deleted: MUST
- \* It MUST Advertise the STags, if allocated, to the target in the iSER header of the SendSE Message carrying the iSCSI PDU, as described in section 9.2.

For the Task Management Function Request with the TASK REASSIGN function for a SCSI Read or bidirectional command, the iSCSI Layer at the initiator MUST set ExpDataSN to 0 since the data transfer and acknowledgements happen transparently to the iSCSI Layer at the initiator. This provides the flexibility to the iSCSI Layer at the target to request transmission of only the unacknowledged data as specified in [iSCSI].

When the iSER Layer at the target receives the Task Management Function Request with the TASK REASSIGN function, it MUST do the following:

- \* It ~~uses~~ the ITT as specified in the Referenced Task Tag from the Task Management Function Request PDU to locate the mappings that associate the ITT to the Advertised STag(s) and the local STag(s), if any. Deleted: MUST
- \* It MUST invalidate the local STag(s), if any, associated with the ITT. Deleted: August

Deleted: February

\* It should replace the Advertised STag(s) in the remote mapping that associates the ITT to the Advertised STag(s) with the Write STag and the Read STag if present in the iSER header. The Write STag is used in the handling of the R2T PDU(s) from the iSCSI Layer at the target as described in section 7.3.6. The Read STag is used in the handling of the SCSI Data-in PDU(s) from the iSCSI Layer at the target as described in section 7.3.5.

Deleted: MUST

### 7.3.4 SCSI Data-out

Type: control-type PDU

PDU-specific qualifiers: DataDescriptorOut

The iSCSI Layer at the initiator invokes the Send\_Control Operational Primitive qualified with DataDescriptorOut which defines the initiator's I/O Buffer containing unsolicited SCSI Write data.

Deleted: MUST

Deleted: '

If the amount of unsolicited data to be transferred as SCSI Data-out exceeds TargetRecvDataSegmentLength, then the iSCSI Layer at the initiator MUST segment the data into multiple iSCSI control-type PDUs, with the DataSegmentLength having the value of TargetRecvDataSegmentLength in all PDUs generated except the last one. The DataSegmentLength of the last iSCSI control-type PDU carrying the unsolicited data can be up to TargetRecvDataSegmentLength. The iSCSI Layer at the target MUST perform the reassembly function for the unsolicited data.

For unsolicited data, if the F bit is set to 0 in a SCSI Data-out PDU, the iSER Layer at the initiator MUST use a Send Message to send the SCSI Data-out PDU. If the F bit set to 1, the iSER Layer at the initiator MUST use a SendSE Message to send the SCSI Data-out PDU.

Note that for solicited data, the SCSI Data-out PDUs are not used since R2T PDUs are not delivered to the iSCSI layer at the initiator; instead R2T PDUs are transformed by the iSER layer at the target into RDMA Read operations. (See section 7.3.6.)

### 7.3.5 SCSI Data-in

Type: data-type PDU

PDU-specific qualifiers: DataDescriptorIn

When the iSCSI Layer at the target is ready to return the SCSI Read data to the initiator, it invokes the Put\_Data Operational Primitive qualified with DataDescriptorIn which defines the SCSI Data-in

Deleted: MUST

Deleted: August

buffer. See section 7.1 on the general requirement on the handling of iSCSI data-type PDUs. SCSI Data-in PDU(s) are used in SCSI Read data transfer as described in section 9.5.2.

The iSER Layer at the target MUST do the following for each invocation of the Put\_Data Operational Primitive:

1. It ~~uses~~ the ITT in the SCSI Data-in PDU to locate the remote Read STag in the remote mapping that associates the ITT to Advertised STag(s). The remote mapping was established earlier by the iSER Layer at the target when the SCSI Read Command was received from the initiator. Deleted: MUST
2. It MUST generate and send an RDMA Write Message containing the read data to the initiator.
  - a. It MUST use the remote Read STag as the Data Sink STag of the RDMA Write Message.
  - b. It MUST use the Buffer Offset from the SCSI Data-in PDU as the Data Sink Tagged Offset of the RDMA Write Message.
  - c. It MUST use DataSegmentLength from the SCSI Data-in PDU to determine the amount of data to be sent in the RDMA Write Message.
3. It MUST associate DataSN and ITT from the SCSI Data-in PDU with the RDMA Write operation. If the Put\_Data Operational Primitive invocation was qualified with Notify\_Enable set, then when the iSER Layer at the target receives a completion from the RDMAP layer for the RDMA Write Message, the iSER Layer at the target MUST notify the iSCSI Layer by invoking the Data\_Completion\_Notify Operational Primitive qualified with DataSN and ITT. Conversely, if the Put\_Data Operational Primitive invocation was qualified with Notify\_Enable cleared, then the iSER Layer at the target MUST NOT notify the iSCSI Layer on completion and MUST NOT invoke the Data\_Completion\_Notify Operational Primitive.

When the A-bit is set to 1 in the SCSI Data-in PDU, the iSER Layer at the target MUST notify the iSCSI Layer at the target when the data transfer is complete at the initiator. To perform this additional function, the iSER Layer at the target can take advantage of the operational ErrorRecoveryLevel if previously disclosed by the iSCSI Layer via an earlier invocation of the Notice\_Key\_Values Operational Primitive. There are two approaches that can be taken:

Deleted: August

1. If the iSER Layer at the target knows that the operational ErrorRecoveryLevel is 2, or if the iSER Layer at the target does not know the operational ErrorRecoveryLevel, then the iSER Layer at the target MUST issue a zero-length RDMA Read Message following the RDMA Write Message. When the iSER Layer at the target receives a completion for the RDMA Read Message from the RDMAP layer, implying that the RNIC at the initiator has completed processing the RDMA Write Message due to the completion ordering semantics of RDMAP, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the Data\_Ack\_Notify Operational Primitive qualified with ITT and DataSN (see section 3.2.3).
2. If the iSER Layer at the target knows that the operational ErrorRecoveryLevel is 1, then the iSER Layer at the target MUST do one of the following:
  - a. It MUST notify the iSCSI Layer at the target by invoking the Data\_Ack\_Notify Operational Primitive qualified with ITT and DataSN (see section 3.2.3) when it receives the local completion from the RDMAP layer for the RDMA Write Message. This is allowed since digest errors do not occur in iSER (see section 10.1.4.2) and a CRC error will cause the connection to be terminated and the task to be terminated anyway. The local RDMA Write completion from the RDMAP layer guarantees that the RDMAP layer will not access the I/O Buffer again to transfer the data associated with that RDMA Write operation.
  - b. Alternatively, it MUST use the same procedure for handling the data transfer completion at the initiator as for ErrorRecoveryLevel 2.

Deleted: invoke the Data\_Ack\_Notify Operational Primitive qualified with ITT and DataSN (see section 3.2.3) to

Deleted: e

It should be noted that the iSCSI Layer at the target cannot set the A-bit to 1 if the ErrorRecoveryLevel=0.

SCSI status MUST always be returned in a separate SCSI Response PDU. The S bit in the SCSI Data-in PDU MUST always be set to 0. There MUST NOT be a "phase collapse" in the SCSI Data-in PDU.

Since the RDMA Write Message only transfers the data portion of the SCSI Data-in PDU but not the control information in the header, such as ExpCmdSN, if timely updates of such information is crucial, the iSCSI Layer at the initiator MAY issue NOP-out PDUs to request the iSCSI Layer at the target to respond with the information using NOP-in PDUs.

Deleted: August

## 7.3.6 Ready To Transfer (R2T)

Type: data-type PDU

PDU-specific qualifiers: DataDescriptorOut

In order to send an R2T PDU, the iSCSI Layer at the target invokes the Get\_Data Operational Primitive qualified with DataDescriptorOut which defines the I/O Buffer for receiving the SCSI Write data from the initiator. See section 7.1 on the general requirements on the handling of iSCSI data-type PDUs.

Deleted: MUST

The iSER Layer at the target MUST do the following for each invocation of the Get\_Data Operational Primitive:

1. It MUST ensure a valid local STag for the I/O Buffer and should ensure a valid local mapping that associates the Initiator Task Tag (ITT) to the local STag. This may involve allocating a valid local STag and establishing a local mapping.
2. It uses the ITT in the R2T to locate the remote Write STag in the remote mapping that associates the ITT to Advertised STag(s). The remote mapping was established earlier by the iSER Layer at the target when the iSER Message containing the Advertised Write STag and the SCSI Command PDU for a SCSI Write or bidirectional command was received from the initiator.
3. If the iSER-ORD value at the target is set to 0, the iSER Layer at the target MUST terminate the connection and free up the resources associated with the connection (as described in 5.2.3) if it received the R2T PDU from the iSCSI Layer at the target. Upon termination of the connection, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the Connection\_Terminate\_Notify Operational Primitive.
4. If the iSER-ORD value at the target is set to greater than 0, the iSER Layer at the target MUST transform the R2T PDU into an RDMA Read Request Message. While transforming the R2T PDU, the iSER Layer at the target MUST ensure that the number of outstanding RDMA Read Request Messages does not exceed iSER-ORD value. To transform the R2T PDU, the iSER Layer at the target:
  - a. MUST derive the local STag and local Tagged Offset from the DataDescriptorOut that qualified the Get\_Data invocation.
  - b. MUST use the local STag as the Data Sink STag of the RDMA Read Request Message.

Deleted: MUST

Deleted: us

Deleted: August

- c. MUST use the local Tagged Offset as the Data Sink Tagged Offset of the RDMA Read Request Message.
  - d. MUST use the Desired Data Transfer Length from the R2T PDU as the RDMA Read Message Size of the RDMA Read Request Message.
  - e. MUST use the remote Write STag as the Data Source STag of the RDMA Read Request Message.
  - f. MUST use the Buffer Offset from the R2T PDU as the Data Source Tagged Offset of the RDMA Read Request Message.
5. It MUST associate R2TSN and ITT from the R2T PDU with the RDMA Read operation. If the Get\_Data Operational Primitive invocation was qualified with Notify\_Enable set, then when the iSER Layer at the target receives a completion from the RDMAP layer for the RDMA Read operation, the iSER Layer at the target MUST notify the iSCSI Layer by invoking the Data\_Completion\_Notify Operational Primitive qualified with R2TSN and ITT. Conversely, if the Get\_Data Operational Primitive invocation was qualified with Notify\_Enable cleared, then the iSER Layer at the target MUST NOT notify the iSCSI Layer on completion and MUST NOT invoke the Data\_Completion\_Notify Operational Primitive.

When the RDMAP layer at the initiator receives a valid RDMA Read Request Message, it will return an RDMA Read Response Message containing the solicited write data to the target. When the RDMAP layer at target receives the RDMA Read Response Message from the initiator, it will place the solicited data in the I/O Buffer referenced by the Data Sink STag in the RDMA Read Response Message.

Since the RDMA Read Request Message from the target does not transfer the control information in the R2T PDU such as ExpCmdSN, if timely updates of such information is crucial, the iSCSI Layer at the initiator MAY issue NOP-out PDUs to request the iSCSI Layer at the target to respond with the information using NOP-in PDUs.

Similarly, since the RDMA Read Response Message from the initiator only transfers the data but not the control information normally found in the SCSI Data-out PDU, such as ExpStatSN, if timely updates of such information is crucial, the iSCSI Layer at the target MAY issue NOP-in PDUs to request the iSCSI Layer at the initiator to respond with the information using NOP-out PDUs.

### 7.3.7 Asynchronous Message

Type: control-type PDU

PDU-specific qualifiers: DataDescriptorSense

The iSCSI Layer invokes the Send\_Control Operational Primitive qualified with DataDescriptorSense which defines the buffer containing the sense and iSCSI Event information. The iSER Layer MUST use a SendSE Message to send the Asynchronous Message PDU.

Deleted: MUST

### 7.3.8 Text Request & Text Response

Type: control-type PDU

PDU-specific qualifiers: DataDescriptorTextOut (for Text Request), DataDescriptorIn (for Text Response)

The iSCSI Layer invokes the Send\_Control Operational Primitive qualified with DataDescriptorTextOut (or DataDescriptorIn) which defines the Text Request (or Text Response) buffer. The iSER Layer MUST use SendSE Messages to send the Text Request and Text Response PDUs.

Deleted: MUST

### 7.3.9 Login Request & Login Response

Type: control-type PDU

PDU-specific qualifiers: DataDescriptorLoginRequest (for Login Request), DataDescriptorLoginResponse (for Login Response)

The Login Request PDUs and the Login Response PDUs are exchanged when the connection between the initiator and the target is still in the byte stream mode. During the login negotiation, the iSCSI Layer interacts with the transport layer directly and the iSER Layer is not involved. See section 5.1 on iSCSI/iSER Connection Setup.

If the iSCSI Layer attempts to send a Login Request (or a Login Response) PDU during the full feature phase, it invokes the Send\_Control Operational Primitive qualified with DataDescriptorLoginRequest (or DataDescriptorLoginResponse) which defines the Login Request (or Login Response) buffer. The iSER Layer MUST handle it as an iSCSI control-type PDU as described in section 7.2, and use SendSE Messages to send the Login Request and Login Response PDUs.

Deleted: MUST

Deleted: August

### 7.3.10 Logout Request & Logout Response

Type: control-type PDU

PDU-specific qualifiers: None

The iSER Layer MUST use a SendSE Message to send the Logout Request or Logout Response PDU. Section 5.2.1 and 5.2.2 describe the handling of the Logout Request and the Logout Response at the initiator and the target and the interactions between the initiator and the target to terminate a connection.

### 7.3.11 SNACK Request

Type: control-type PDU

PDU-specific qualifiers: None

Since HeaderDigest and DataDigest must be negotiated to "None", there are no digest errors when the connection is in iSER-assisted mode. Also since RDMAP delivers all messages in the order they were sent, there are no sequence errors when the connection is in iSER-assisted mode. Therefore the iSCSI Layer SHOULD NOT send SNACK Request PDUs. In particular, the Proactive (Time out) SNACK SHOULD NOT be issued. If the iSCSI Layer invokes the Send\_Control Operational Primitive to request the iSER Layer to send a SNACK Request, the iSER Layer MUST handle it as an iSCSI control-type PDU as described in section 7.2, and use a SendSE Message to send the SNACK Request PDU. Upon receiving the iSER Message containing the SNACK PDU, the iSER Layer notifies the iSCSI Layer using the Control\_Notify Operational Primitive.

### 7.3.12 Reject

Type: control-type PDU

PDU-specific qualifiers: DataDescriptorReject

The iSCSI Layer invokes the Send\_Control Operational Primitive qualified with DataDescriptorReject which defines the Rejct buffer. The iSER Layer MUST use a SendSE Message to send the Reject PDU.

Deleted: MUST

### 7.3.13 NOP-Out & NOP-In

Type: control-type PDU

Deleted: August

PDU-specific qualifiers: DataDescriptorNOPOut (for NOP-Out),  
DataDescriptorNOPIIn (for NOP-In)

The iSCSI Layer invokes the Send\_Control Operational Primitive qualified with DataDescriptorNOPOut (or DataDescriptorNOPIIn) which defines the Ping (or Return Ping) data buffer. The iSER Layer MUST use SendSE Messages to send the NOP-Out (or NOP-In) PDU.

Deleted: MUST

Deleted: August

## 8 Flow Control and STag Management

### 8.1 Flow Control for RDMA Send Message Types

RDMA Send Message Types are used by the iSER Layer to transfer iSCSI control-type PDUs. Each RDMA Send Message Type consumes an Untagged Buffer at the Data Sink. However, neither the RDMA layer nor the iSER Layer provides an explicit flow control mechanism for the RDMA Send Message Types. Therefore, the iSER Layer SHOULD provision enough Untagged buffers for handling incoming RDMA Send Message Types to prevent a buffer underrun condition at the RDMA layer. If a buffer underrun happens, it may result in the termination of the connection. An implementation may choose to satisfy this requirement by using a common buffer pool shared across multiple connections, with usage limits on a per connection basis and usage limits on the buffer pool itself. In such an implementation, exceeding the buffer usage limit for a connection or the buffer pool itself may trigger interventions from the iSER Layer to replenish the buffer pool and/or to isolate the connection causing the problem.

### 8.2 Flow Control for RDMA Read Resources

The total number of RDMA Read operations that can be active simultaneously on an iSCSI/iSER connection depends on the amount of resources allocated as declared in the iSER Hello exchange described in section 5.1.3. Exceeding the number of RDMA Read operations allowed on a connection will result in the connection being terminated by the RDMA layer. The iSER Layer at the target maintains the iSER-ORD to keep track of the maximum number of RDMA Read Requests that can be issued by the iSER Layer on a particular RDMA Stream.

During connection setup (see section 5.1), iSER-IRD is known at the initiator and iSER-ORD is known at the target after the iSER Layers at the initiator and the target have respectively allocated the connection resources necessary to support iWARP, as directed by the `Allocate_Connection_Resources` Operational Primitive from the iSCSI Layer before the end of the iSCSI Login Phase. In the full feature phase, the first message sent by the initiator is the iSER Hello Message (see section 9.3) which contains the value of iSER-IRD. In response to the iSER Hello Message, the target sends the iSER HelloReply Message (see section 9.4) which contains the value of iSER-ORD. The iSER Layer at both the initiator and the target MAY adjust (lower) the resources associated with iSER-IRD and iSER-ORD respectively to match the iSER-ORD value declared in the HelloReply Message. The iSER Layer at the target, MUST flow control the RDMA

Read Request Messages to not exceed the iSER-ORD value at the target.

### 8.3 Flow Control for Control-Type PDUs from the Initiator

The control-type PDUs that can be sent by an initiator to a target can be grouped into the following categories:

1. **Regulated:** Control-type PDUs in this category are regulated by the iSCSI CmdSN window mechanism and the immediate flag is not set.
2. **Unregulated but Expected:** Control-type PDUs in this category are not regulated by the iSCSI CmdSN window mechanism but are expected by the target.
3. **Unregulated and Unexpected:** Control-type PDUs in this category are not regulated by the iSCSI CmdSN window mechanism and are "unexpected" by the target.

For the control-type PDUs that can be sent by the initiator in the Regulated category, the queuing capacity required of the iSCSI layer at the target is described in section 3.2.2.1 of [RFC3720]. For each of these control-type PDUs sent by the initiator, the initiator MUST provision for the buffer resources required for the corresponding control-type PDU to be returned from the target. The following is a list of the PDUs that can be sent by the initiator and the PDUs that are sent by the target in response:

- a. When an initiator sends a SCSI Command PDU, it expects a SCSI Response PDU from the target. Alternatively, the target can respond with the Reject PDU before the task is active.
- b. When the initiator sends a Task Management Function Request PDU, it expects a Task Management Function Response PDU from the target.
- c. When the initiator sends a Text Request PDU, it expects a Text Response PDU from the target.
- d. When the initiator sends a Login Request PDU, it expects a Login Response PDU from the target.
- e. When the initiator sends a Logout Request PDU, it expects a Logout Response PDU from the target.

- f. When the initiator sends a NOP-out PDU as a ping request with ITT  $\neq$  0xffffffff and TTT = 0xffffffff, it expects a NOP-in PDU from the target with the same ITT and TTT as in the ping request.

For the control-type PDUs in the Unregulated but Expected category, the amount of buffering resources required at the target can be predetermined. The following is a list of the PDUs in this category:

- a. SCSI Data-out PDUs are used by the initiator to send unsolicited data. The amount of buffer resources required by the target can be determined using FirstBurstLength. Note that SCSI Data-out PDUs are not used for solicited data since the R2T PDU which is used for solicitation is transformed into RDMA Read operations by the iSER layer at the target. See section 7.3.4.
- b. A NOP-out PDU with ITT = 0xffffffff and TTT  $\neq$  0xffffffff is sent as a ping response by the initiator to the NOP-in PDU sent as a ping request by the target.

The number of PDUs in the Unregulated and Unexpected category which can be sent by an initiator is controlled by MaxOutstandingUnexpectedPDUs declared by the target. (See section 6.7.) After a PDU in this category is sent by the initiator, it is outstanding until it is retired. At any time, the number of outstanding PDUs MUST not exceed MaxOutstandingUnexpectedPDUs. The following is a list of the PDUs in this category and the conditions for retiring the outstanding PDU:

- a. For the PDUs listed in the Regulated category but with the immediate flag set, a PDU is outstanding until the target responds with the corresponding response PDU.
- b. SNACK PDUs are not needed in iSER. (See section 7.3.11.) A SNACK PDU which is sent by the initiator anyway is outstanding until the target responds with a SCSI Response PDU for the referenced command.
- c. For a NOP-out PDU with ITT = TTT = 0xffffffff and CmdSN = x, the PDU is outstanding until the initiator sends a non-immediate control-type PDU on the same connection with CmdSN = y (where y is at least x) and the target responds with a control-type PDU on any connection where ExpCmdSN is at least y+1. (Implementation note: To avoid complexity, a NOP-out PDU with ITT  $\neq$  0xffffffff can be used instead.)

Deleted: the same

Deleted: x

Deleted: August

### 8.4 Flow Control for Control-Type PDUs from the Target

Control-type PDUs that can be sent by a target and are expected by the initiator are listed in the Regulated category. (See section 8.3.)

For the control-type PDUs that can be sent by a target and are unexpected by the initiator, the number is controlled by MaxOutstandingUnexpectedPDUs declared by the initiator. (See section 6.7.) After a PDU in this category is sent by a target, it is outstanding until it is retired. At any time, the number of outstanding PDUs MUST not exceed MaxOutstandingUnexpectedPDUs. The following is a list of the PDUs in this category and the conditions for retiring the outstanding PDU:

- a. For an Asynchronous Message PDU with StatSN = x, the PDU is outstanding until the initiator sends a control-type PDU with ExpStatSN set to at least x+1.
- b. For a Reject PDU with StatSN = x which is sent after a task is active, the PDU is outstanding until the initiator sends a control-type PDU with ExpStatSN set to at least x+1.
- c. For a NOP-in PDU with ITT = TTT = 0xffffffff and StatSN = x, the PDU is outstanding until the target sends a PDU with StatSN = y (where y is at least x) on the same connection which advances StatSN and the initiator responds with a control-type PDU on any connection where ExpStatSN is at least y+1. (Implementation note: To avoid complexity, a NOP-in PDU with TTT != 0xffffffff can be used instead.)
- d. For a NOP-in PDU sent as a ping request with ITT = 0xffffffff and TTT != 0xffffffff, the PDU is outstanding until the initiator sends a NOP-out PDU with the same ITT and TTT as in the ping request.

Deleted: the same

Deleted: x

### 8.5 STag Management

An STag, as defined in [RDMAP], is an identifier of a Tagged Buffer used in an RDMA operation. The allocation and the subsequent invalidation of the STags are specified in this document if the STags are exposed on the wire by being Advertised in the iSER header or declared in the RDMAP header of an iWARP Message.

Deleted: August

8.5.1 Allocation of STags

When the iSCSI Layer at the initiator invokes the Send\_Control Operational Primitive to request the iSER Layer at the initiator to process a SCSI Command, zero, one, or two STags may be allocated by the iSER Layer. See section 7.3.1 for details. The number of STags allocated depends on whether the command is unidirectional or bidirectional and whether solicited write data transfer is involved or not.

When the iSCSI Layer at the initiator invokes the Send\_Control Operational Primitive to request the iSER Layer at the initiator to process a Task Management Function Request with the TASK REASSIGN function, besides allocating zero, one, or two STags, the iSER Layer MUST invalidate the existing STags, if any, associated with the ITT. See section 7.3.3 for details.

The iSER Layer at the target allocates a local Data Sink STag when the iSCSI Layer at the target invokes the Get\_Data Operational Primitive to request the iSER Layer to process an R2T PDU. See section 7.3.6 for details.

8.5.2 Invalidation of STags

The invalidation of the STags at the initiator at the completion of a unidirectional or bidirectional command when the associated SCSI Response PDU is sent by the target is described in section 7.3.2.

When a unidirectional or bidirectional command concludes without the associated SCSI Response PDU being sent by the target, the iSCSI Layer at the initiator MUST request the iSER Layer at the initiator to invalidate the STags by invoking the Deallocate\_Task\_Resources Operational Primitive qualified with ITT. In response, the iSER Layer at the initiator locates the STag(s) (if any) in the local mapping that associates the ITT to the local STag(s). The iSER Layer at the initiator MUST invalidate the STag(s) (if any) and should invalidate the local mapping.

Deleted: e

Deleted: MUST

For an RDMA Read operation used to realize a SCSI Write data transfer, the iSER Layer at the target SHOULD invalidate the Data Sink STag at the conclusion of the RDMA Read operation referencing the Data Sink STag (to permit the immediate reuse of buffer resources).

For an RDMA Write operation used to realize a SCSI Read data transfer, the Data Source STag at the target is not declared to the

Deleted: August

Deleted: February

initiator and is not exposed on the wire. Invalidation of the STag is thus not specified.

When a unidirectional or bidirectional command concludes without the associated SCSI Response PDU being sent by the target, the iSCSI Layer at the target MUST request the iSER Layer at the target to invalidate the STags by invoking the Deallocate\_Task\_Resources Operational Primitive qualified with ITT. In response, the iSER Layer at the target locates the local STag(s) (if any) in the local mapping that associates the ITT to the local STag(s). The iSER Layer at the target MUST invalidate the local STag(s) (if any) and should invalidate the mapping.

Deleted: e

Deleted: MUST

Deleted: August

### 9 iSER Control and Data Transfer

For iSCSI data-type PDUs (see section 7.1), the iSER Layer uses RDMA Read and RDMA Write operations to transfer the solicited data. For iSCSI control-type PDUs (see section 7.2), the iSER Layer uses RDMAP Send Message Types.

#### 9.1 iSER Header Format

An iSER header MUST be present in every RDMAP Send Message Type. The iSER header is located in the first 12 bytes of the message payload of the RDMAP Send Message Type, as shown in Figure 2.

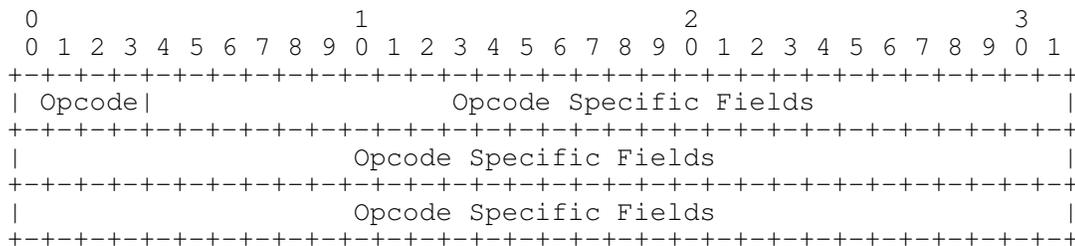


Figure 2 iSER Header Format

Opcode - Operation Code: 4 bits

The Opcode field identifies the type of iSER Messages:

0001b = iSCSI control-type PDU

0010b = iSER Hello Message

0011b = iSER HelloReply Message

All other opcodes are reserved.

#### 9.2 iSER Header Format for iSCSI Control-Type PDU

The iSER Layer uses RDMAP Send Message Types to transfer iSCSI control-type PDUs (see section 7.2). The message payload of each of the RDMAP Send Message Types used for transferring an iSER Message contains an iSER Header followed by an iSCSI control-type PDU.

The iSER header in an RDMAP Send Message Type carrying an iSCSI control-type PDU MUST have the format as described in Figure 3.

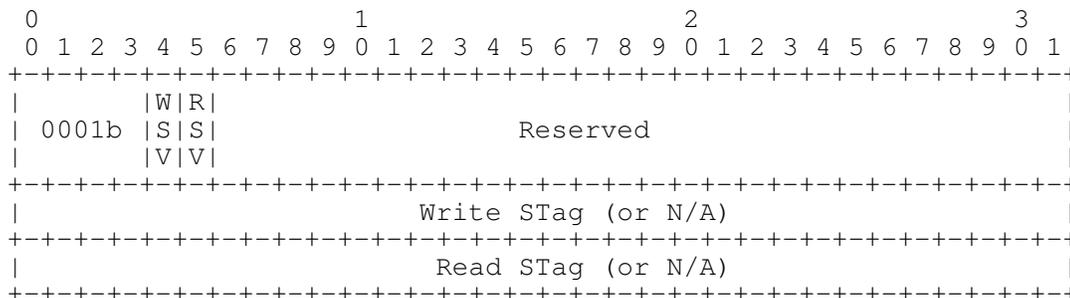


Figure 3 iSER Header Format for iSCSI Control-Type PDU

WSV - Write STag Valid flag: 1 bit

This flag indicates the validity of the Write STag field of the iSER Header. If set to one, the Write STag field in this iSER Header is valid. If set to zero, the Write STag field in this iSER Header MUST be ignored at the receiver. The Write STag Valid flag is set to one when there is solicited data to be transferred for a SCSI Write or bidirectional command, or when there are non-immediate unsolicited and solicited data to be transferred for the referenced task specified in a Task Management Function Request with the TASK REASSIGN function.

RSV - Read STag Valid flag: 1 bit

This flag indicates the validity of the Read STag field of the iSER Header. If set to one, the Read STag field in this iSER Header is valid. If set to zero, the Read STag field in this iSER Header MUST be ignored at the receiver. The Read STag Valid flag is set to one for a SCSI Read or bidirectional command, or a Task Management Function Request with the TASK REASSIGN function.

Write STag - Write Steering Tag: 32 bits

This field contains the Write STag when the Write STag Valid flag is set to one. For a SCSI Write or bidirectional command, the Write STag is used to Advertise the initiator's I/O Buffer containing the solicited data. For a Task Management Function Request with the TASK REASSIGN function, the Write STag is used to Advertise the initiator's I/O Buffer containing the non-immediate unsolicited data and solicited data. This Write STag is used as the Data Source STag in the resultant RDMA Read operation(s). When the Write STag Valid flag is set to zero, this field MUST be set to zero.

Deleted: ' (pointing to 's I/O Buffer)

Deleted: August (pointing to this field MUST be set to zero.)

Read STag - Read Steering Tag: 32 bits

This field contains the Read STag when the Read STag Valid flag is set to one. The Read STag is used to Advertise the initiator's Read I/O Buffer of a SCSI Read or bidirectional command, or a Task Management Function Request with the TASK REASSIGN function. This Read STag is used as the Data Sink STag in the resultant RDMA Write operation(s). When the Read STag Valid flag is zero, this field MUST be set to zero.

Deleted: '

Reserved:

Reserved fields MUST be set to zero on transmit and MUST be ignored on receive.

9.3 iSER Header Format for iSER Hello Message

An iSER Hello Message MUST only contain the iSER header which MUST have the format as described in Figure 4. iSER Hello Message is the first RDMA Message sent on the RDMA Stream from the iSER Layer at the initiator to the iSER Layer at the target.

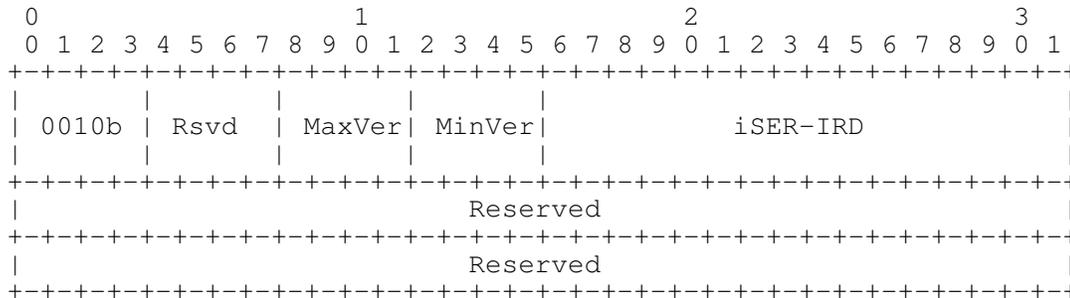


Figure 4 iSER Header Format for iSER Hello Message

MaxVer - Maximum Version: 4 bits

This field specifies the maximum version of the iSER protocol supported. It MUST be set to 1 to indicate the version of the specification described in this document.

MinVer - Minimum Version: 4 bits

This field specifies the minimum version of the iSER protocol supported. It MUST be set to 1 to indicate the version of the specification described in this document.

Deleted: August

iSER-IRD: 16 bits

This field contains the value of the iSER-IRD at the initiator.

Reserved (Rsvd):

Reserved fields MUST be set to zero on transmit, and MUST be ignored on receive.

9.4 iSER Header Format for iSER HelloReply Message

An iSER HelloReply Message MUST only contain the iSER header which MUST have the format as described in Figure 5. The iSER HelloReply Message is the first RDMAP Message sent on the RDMAP Stream from the iSER Layer at the target to the iSER Layer at the initiator.

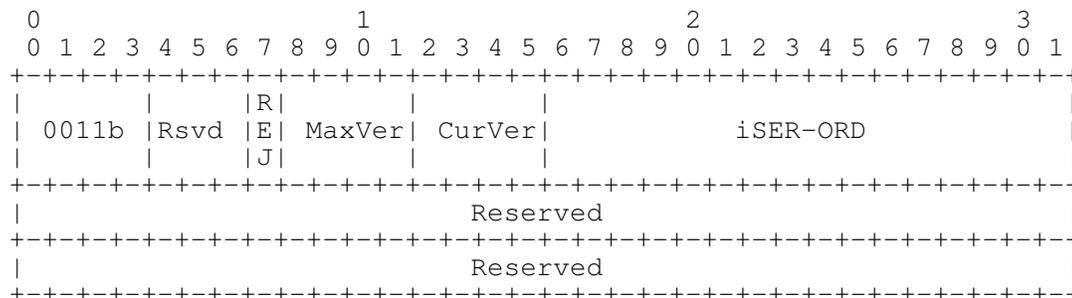


Figure 5 iSER Header Format for iSER HelloReply Message

REJ - Reject flag: 1 bit

This flag indicates whether the target is rejecting this connection. If set to one, the target is rejecting the connection.

MaxVer - Maximum Version: 4 bits

This field specifies the maximum version of the iSER protocol supported. It MUST be set to 1 to indicate the version of the specification described in this document.

CurVer - Current Version: 4 bits

This field specifies the current version of the iSER protocol supported. It MUST be set to 1 to indicate the version of the specification described in this document.

iSER-ORD: 16 bits

This field contains the value of the iSER-ORD at the target.

Reserved (Rsvd):

Reserved fields MUST be set to zero on transmit, and MUST be ignored on receive.

9.5 SCSI Data Transfer Operations

The iSER Layer at the initiator and the iSER Layer at the target handle each SCSI Write, SCSI Read, and bidirectional operation as described below.

9.5.1 SCSI Write Operation

The iSCSI Layer at the initiator invokes the Send\_Control Operational Primitive to request the iSER Layer at the initiator to send the SCSI Write Command. The iSER Layer at the initiator MUST request the RDMAP layer to transmit a SendSE Message with the message payload consisting of the iSER header followed by the SCSI Command PDU and immediate data (if any). If there is solicited data, the iSER Layer MUST Advertise the Write STag in the iSER header of the SendSE Message, as described in section 9.2. Upon receiving the SendSE Message, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the Control\_Notify Operational Primitive qualified with the SCSI Command PDU. See section 7.3.1 for details on the handling of the SCSI Write Command.

Deleted: MUST

For the non-immediate unsolicited data, the iSCSI Layer at the initiator invokes a Send\_Control Operational Primitive qualified with the SCSI Data-out PDU. Upon receiving each Send or SendSE Message containing the non-immediate unsolicited data, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the Control\_Notify Operational Primitive qualified with the SCSI Data-out PDU. See section 7.3.4 for details on the handling of the SCSI Data-out PDU.

Deleted: MUST

For the solicited data, when the iSCSI Layer at the target has an I/O Buffer available, it invokes the Get\_Data Operational Primitive qualified with the R2T PDU. See section 7.3.6 for details on the handling of the R2T PDU.

Deleted: MUST

When the data transfer associated with this SCSI Write operation is complete, the iSCSI Layer at the target invokes the Send\_Control Operational Primitive when it is ready to send the SCSI Response

Deleted: MUST

Deleted: August

PDU. Upon receiving a SendSE or SendInvSE Message containing the SCSI Response PDU, the iSER Layer at the initiator MUST notify the iSCSI Layer at the initiator by invoking the Control\_Notify Operational Primitive qualified with the SCSI Response PDU. See section 7.3.2 for details on the handling of the SCSI Response PDU.

9.5.2 SCSI Read Operation

The iSCSI Layer at the initiator invokes the Send\_Control Operational Primitive to request the iSER Layer at the initiator to send the SCSI Read Command. The iSER Layer at the initiator MUST request the RDMAP layer to transmit a SendSE Message with the message payload consisting of the iSER header followed by the SCSI Command PDU. The iSER Layer at the initiator MUST Advertise the Read STag in the iSER header of the SendSE Message, as described in section 9.2. Upon receiving the SendSE Message, the iSER Layer at the target MUST notify the iSCSI Layer at the target by invoking the Control\_Notify Operational Primitive qualified with the SCSI Command PDU. See section 7.3.1 for details on the handling of the SCSI Read Command.

Deleted: MUST

When the requested SCSI data is available in the I/O Buffer, the iSCSI Layer at the target invokes the Put\_Data Operational Primitive qualified with the SCSI Data-in PDU. See section 7.3.5 for details on the handling of the SCSI Data-in PDU.

Deleted: MUST

When the data transfer associated with this SCSI Read operation is complete, the iSCSI Layer at the target invokes the Send\_Control Operational Primitive when it is ready to send the SCSI Response PDU. Upon receiving the SendInvSE Message containing the SCSI Response PDU, the iSER Layer at the initiator MUST notify the iSCSI Layer at the initiator by invoking the Control\_Notify Operational Primitive qualified with the SCSI Response PDU. See section 7.3.2 for details on the handling of the SCSI Response PDU.

Deleted: MUST

9.5.3 Bidirectional Operation

The initiator and the target handle the SCSI Write and the SCSI Read portions of this bidirectional operation the same as described in Section 9.5.1 and Section 9.5.2 respectively.

Deleted: in a similar manner

Deleted: August

## 10 iSER Error Handling and Recovery

[RDMAP] and the protocols below it provide the iSER Layer with reliable in-order delivery. Therefore, the error management needs of an iSCSI/iSER connection are somewhat different than those of traditional iSCSI running directly over TCP.

### 10.1 Error Handling

iSER error handling is described in the following sections, classified loosely based on the sources of errors:

1. Those originating at the transport layer (e.g., TCP).
2. Those originating at the RDMAP layer.
3. Those originating at the iSER Layer.
4. Those originating at the iSCSI Layer.

#### 10.1.1 Errors in the Transport Layer

If the transport layer is TCP, then TCP packets with errors are silently dropped by the TCP layer and result in retransmission at the TCP layer. This has no impact on the iSER Layer. However, connection loss (e.g., link failure) and unexpected termination (e.g., TCP graceful or abnormal close without the iSCSI Logout exchanges) at the transport layer will cause the iSCSI/iSER connection to be terminated as well.

##### 10.1.1.1 Failure in the Transport Layer Before iWARP is Enabled

If the Connection is lost or terminated before the iSCSI Layer invokes the Allocate\_Connection\_Resources Operational Primitive, the login process is terminated and no further action is required.

If the Connection is lost or terminated after the iSCSI Layer has invoked the Allocate\_Connection\_Resources Operational Primitive, then the iSCSI Layer MUST request the iSER Layer to deallocate all connection resources by invoking the Deallocate\_Connection\_Resources Operational Primitive.

Deleted: invoke the Deallocate\_Connection\_Resources Operational Primitive to

##### 10.1.1.2 Failure in the Transport Layer After iWARP is Enabled

If the Connection is lost or terminated after the iSCSI Layer has invoked the Enable\_Datamover Operational Primitive, the iSER Layer MUST notify the iSCSI Layer of the connection loss by invoking the

Deleted: August

Connection\_Terminate\_Notify Operational Primitive. Prior to invoking the Connection\_Terminate\_Notify Operational Primitive, the iSER layer MUST perform the actions described in Section 5.2.3.2.

10.1.2 Errors in the iWARP protocol suite

The RDMAP layer does not have error recovery operations built in. If errors are detected at the RDMAP layer, the RDMAP layer will terminate the RDMAP Stream and the associated Connection.

10.1.2.1 Errors Detected in the Local RDMAP Layer

If an error is encountered at the local RDMAP layer, the RDMAP layer MAY send a Terminate Message to the Remote Peer to report the error if possible. (See [RDMAP] for the list of errors where a Terminate Message is sent.) The RDMAP layer is responsible for terminating the Connection. After the RDMAP layer notifies the iSER Layer that the Connection is terminated, the iSER Layer MUST notify the iSCSI Layer by invoking the Connection\_Terminate\_Notify Operational Primitive. Prior to invoking the Connection\_Terminate\_Notify Operational Primitive, the iSER layer MUST perform the actions described in Section 5.2.3.2.

10.1.2.2 Errors Detected in the RDMAP Layer at the Remote Peer

If an error is encountered at the RDMAP layer at the Remote Peer, the RDMAP layer at the Remote Peer may send a Terminate Message to report the error if possible. If it is unable to send the Terminate Message, the Connection is terminated. This is treated the same as a failure in the transport layer after iWARP is enabled as described in section 10.1.1.2.

Deleted: similar to

If an error is encountered at the RDMAP layer at the Remote Peer and it is able to send a Terminate Message, the RDMAP layer at the Remote Peer is responsible for terminating the connection. After the local RDMAP layer notifies the iSER Layer that the Connection is terminated, the iSER Layer MUST notify the iSCSI Layer by invoking the Connection\_Terminate\_Notify Operational Primitive. Prior to invoking the Connection\_Terminate\_Notify Operational Primitive, the iSER layer MUST perform the actions described in Section 5.2.3.2.

10.1.3 Errors in the iSER Layer

The error handling due to errors at the iSER Layer is described in the following sections.

Deleted: August

Deleted: February

10.1.1.3.1 Insufficient Connection Resources to Support iWARP at Connection Setup

Deleted: at the Initiator

After the iSCSI Layer at the initiator invokes the Allocate\_Connection\_Resources Operational Primitive during the iSCSI login negotiation phase, if the iSER Layer at the initiator fails to allocate the connection resources necessary to support iWARP, it MUST return a status of failure to the iSCSI Layer at the initiator. The iSCSI Layer at the initiator MUST terminate the Connection as described in Section 5.2.3.1.

After the iSCSI Layer at the target invokes the Allocate\_Connection\_Resources Operational Primitive during the iSCSI login negotiation phase, if the iSER Layer at the target fails to allocate the connection resources necessary to support iWARP, it MUST return a status of failure to the iSCSI Layer at the target. The iSCSI Layer at the target MUST send a Login Response with a status class of 3 (Target Error), and a status code of "0302" (Out of Resources). The iSCSI Layers at the initiator and the target MUST terminate the Connection as described in Section 5.2.3.1.

Deleted: Insufficient Connection Resources to Support iWARP at the Target at Connection Setup

10.1.1.3.2 iSER Negotiation Failures

Formatted: Bullets and Numbering

If the iWARP or iSER related parameters declared by the initiator in the iSER Hello Message is unacceptable to the iSER Layer at the target, the iSER Layer at the target MUST set the Reject (REJ) flag, as described in section 9.4, in the iSER HelloReply Message. The following are the cases when the iSER Layer MUST set the REJ flag to 1 in the HelloReply Message:

- \* The initiator-declared iSER-IRD value is greater than 0 and the target-declared iSER-ORD value is 0.
- \* The initiator-supported and the target-supported iSER protocol versions do not overlap.

After requesting the RDMAP layer to send the iSER HelloReply Message, the handling of the error situation is the same as that for iSER format errors, as described in section 10.1.3.3.

Deleted: similar to

Deleted: ,

Deleted: 10.1.3.4

Formatted: Bullets and Numbering

10.1.1.3.3 iSER Format Errors

The following types of errors in an iSER header are considered format errors:

- \* Illegal contents of any iSER header field

Deleted: August

- \* Inconsistent field contents in an iSER header
- \* Length error for an iSER Hello or HelloReply Message (see section 9.3 and 9.4)

When a format error is detected, the following events MUST occur in the specified sequence:

1. The iSER Layer MUST request the RDMAP layer to terminate the RDMAP Stream. The RDMAP layer MUST terminate the associated Connection.
2. The iSER Layer MUST notify the iSCSI Layer of the connection termination by invoking the Connection\_Terminate\_Notify Operational Primitive. Prior to invoking the Connection\_Terminate\_Notify Operational Primitive, the iSER layer MUST perform the actions described in Section 5.2.3.2.

Formatted: Bullets and Numbering

#### 10.1.3.4 iSER Protocol Errors

The first iSER Message sent by the iSER Layer at the initiator after transitioning into iSER-assisted mode MUST be the iSER Hello Message (see section 9.3). Likewise, the first iSER Message sent by the iSER Layer at the target after transitioning into iSER-assisted mode MUST be the iSER HelloReply Message (see section 9.4). Failure to send the iSER Hello or HelloReply Message, as indicated by the wrong Opcode in the iSER header, is a protocol error. The handling of this error situation is the same as that for iSER format errors, as described in section 10.1.3.3.

- Deleted: ¶
- Deleted: an iSER protocol error
- Deleted: similar to
- Deleted: ,
- Deleted: 10.1.3.4

If the sending side of an iSER-enabled connection acts in a manner not permitted by the negotiated or declared login/text operational key values as described in section 6, this is a protocol error and the receiving side MAY handle this the same as for iSER format errors as described in section 10.1.3.3.

#### 10.1.4 Errors in the iSCSI Layer

The error handling due to errors at the iSCSI Layer is described in the following sections. For error recovery, see section 10.2.

##### 10.1.4.1 iSCSI Format Errors

When an iSCSI format error is detected, the iSCSI Layer MUST request the iSER Layer to terminate the RDMAP Stream by invoking the Connection\_Terminate Operational Primitive. For more details on the connection termination, see Section 5.2.3.1.

- Deleted: invoke the Connection\_Terminate Operational Primitive to
- Deleted: August

10.1.4.2 iSCSI Digest Errors

In the iSER-assisted mode, the iSCSI Layer will not see any digest error because both the HeaderDigest and the DataDigest keys are negotiated to "None".

10.1.4.3 iSCSI Sequence Errors

For traditional iSCSI, sequence errors are caused by dropped PDUs due to header or data digest errors. Since digests are not used in iSER-assisted mode and the RDMAP layer will deliver all messages in the order they were sent, sequence errors will not occur in iSER-assisted mode.

10.1.4.4 iSCSI Protocol Error

When the iSCSI Layer handles certain protocol errors by dropping the connection, the error handling is the same as that for iSCSI format errors as described in section 10.1.4.1.

Deleted: similar to

When the iSCSI Layer uses the iSCSI Reject PDU and response codes to handle certain other protocol errors, no special handling at the iSER Layer is required.

10.1.4.5 SCSI Timeouts and Session Errors

This is handled at the iSCSI Layer and no special handling at the iSER Layer is required.

10.1.4.6 iSCSI Negotiation Failures

For negotiation failures that happen during the Login Phase at the initiator after the iSCSI Layer has invoked the Allocate\_Connection\_Resources Operational Primitive and before the Enable\_Datamover Operational Primitive has been invoked, the iSCSI Layer MUST request the iSER Layer to deallocate all connection resources by invoking the Deallocate\_Connection\_Resources Operational Primitive. The iSCSI Layer at the initiator MUST terminate the Connection.

Deleted: invoke the Deallocate\_Connection\_Resources Operational Primitive to

For negotiation failures during the Login Phase at the target, the iSCSI Layer can use a Login Response with a status class other than 0 (success) to terminate the Login Phase. If the iSCSI Layer has invoked the Allocate\_Connection\_Resources Operational Primitive and before the Enable\_Datamover Operational Primitive has been invoked, the iSCSI Layer at the target MUST request the iSER Layer at the target to deallocate all connection resources by invoking the

Deleted: invoke the Deallocate\_Connection\_Resources Operational Primitive to

Deleted: August

Deallocate\_Connection\_Resources Operational Primitive. The iSCSI Layer at both the initiator and the target MUST terminate the Connection.

During the iSCSI Login Phase, if the iSCSI Layer at the initiator receives a Login Response from the target with a status class other than 0 (Success) after the iSCSI Layer at the initiator has invoked the Allocate\_Connection\_Resources Operational Primitive, the iSCSI Layer MUST ~~request the iSER Layer to deallocate all connection resources~~ by invoking the Deallocate\_Connection\_Resources Operational Primitive. The iSCSI Layer MUST terminate the Connection in this case.

Deleted: invoke the Deallocate\_Connection\_Resources Operational Primitive to

For negotiation failures during the full feature phase, the error handling is left to the iSCSI Layer and no special handling at the iSER Layer is required.

### 10.2 Error Recovery

Error recovery requirements of iSCSI/iSER are the same as that of traditional iSCSI. All three ErrorRecoveryLevels as defined in [iSCSI] are supported in iSCSI/iSER.

- \* For ErrorRecoveryLevel 0, session recovery is handled by iSCSI and no special handling by the iSER Layer is required.
- \* For ErrorRecoveryLevel 1, see section 10.2.1 on SNACK Handling and PDU Recovery.
- \* For ErrorRecoveryLevel 2, see section 10.2.2 on Connection Recovery.

The iSCSI Layer may invoke the Notice\_Key\_Values Operational Primitive during connection setup to request the iSER Layer to take note of the value of the operational ErrorRecoveryLevel, as described in sections 5.1.1 and 5.1.2.

#### 10.2.1 SNACK Handling and PDU Recovery

As described in sections 10.1.4.2 and 10.1.4.3, digest and sequence errors will not occur in the iSER-assisted mode. If the RDMA layer detects an error, it will close the iSCSI/iSER connection, as described in section 10.1.2. Therefore, PDU recovery is not useful in the iSER-assisted mode.

Deleted: August

The iSCSI Layer at the initiator SHOULD disable timeout-driven proactive SNACKs. If the iSCSI Layer at the target receives a SNACK, it MUST respond to it as required by [iSCSI].

The iSCSI Layer at the initiator SHOULD disable iSCSI timeout-driven PDU retransmissions.

### 10.2.2 Connection Recovery

The iSCSI Layer at the initiator MAY reassign connection allegiance for non-immediate commands which are still in progress and are associated with the failed connection by using a Task Management Function Request with the TASK REASSIGN function. See section 7.3.3 for more details.

When the iSCSI Layer at the initiator does a task reassignment for a SCSI Write command, it ~~qualifies the Send Control Operational Primitive invocation with DataDescriptorOut which defines the I/O Buffer for both the non-immediate unsolicited data and the solicited data.~~ This allows the iSCSI Layer at the target to use recovery R2Ts to request for data originally sent as unsolicited and solicited from the initiator.

Deleted: MUST

Deleted: y

When the iSCSI Layer at the target accepts a reassignment request for a SCSI Read command, it MUST ~~request the iSER Layer to process SCSI Data-in for all unacknowledged data~~ by invoking the Put\_Data Operational Primitive. See section 7.3.5 on the handling of SCSI Data-in.

Deleted: invoke the Put\_Data Operational Primitive to

When the iSCSI Layer at the target accepts a reassignment request for a SCSI Write command, it MUST ~~request the iSER Layer to process a recovery R2T for any non-immediate unsolicited data and any solicited data sequences that have not been received~~ by invoking the Get\_Data Operational Primitive. See section 7.3.6 on the handling of Ready To Transfer (R2T).

Deleted: invoke the Get\_Data Operational Primitive to

The iSCSI Layer at the target MUST NOT issue recovery R2Ts on an iSCSI/iSER connection for a task for which the connection allegiance was never reassigned. The iSER Layer at the target MAY reject such a recovery R2T received via the Get\_Data Operational Primitive invocation from the iSCSI Layer at the target, with an appropriate error code.

The iSER Layer at the target will process the requests invoked by the Put\_Data and Get\_Data Operational Primitives for a reassigned task in the same way as for the original commands.

Deleted: August

## 11 Security Considerations

Since iSER is layered on top of the iWARP layer and provides the RDMA extensions to the iSCSI protocol, the security considerations of iSER are the same as, that of the underlying RDMAP layer as described in [RDMAP].

Deleted: similar to

All the security protocol mechanisms described in [iSCSI] MAY be deployed for an iSCSI/iSER connection. If the IPsec mechanism is used, then it MUST be established before the connection transitions from the traditional iSCSI mode to the iSER-assisted mode.

Deleted: August

12 References

12.1 Normative References

- [iSCSI] J. Satran et al., "iSCSI", RFC 3720, April 2004
- [RDMAP] R. Recio et al., "An RDMA Protocol Specification", IETF Internet-draft draft-ietf-rddp-rdmap-03.txt (work in progress), February 2005
- [DDP] H. Shah et al., "Direct Data Placement over Reliable Transports", IETF Internet-draft draft-ietf-rddp-ddp-03.txt (work in progress), August 2004
- [MPA] P. Culley et al., "Marker PDU Aligned Framing for TCP Specification", IETF Internet-draft draft-ietf-rddp-mpa-01.txt (work in progress), July 2004
- [TCP] Postel, J., "Transmission Control Protocol", STD 7, RFC 793, September 1981

12.2 Informative References

- [SAM2] T10/1157D, SCSI Architecture Model - 2 (SAM-2)
- [DA] M. Chadalapaka et al., "Datamover Architecture for iSCSI", IETF Internet-draft, draft-ietf-ips-da-00.txt (work in progress), September 2004
- [VERBS] J. Hilland et al., "RDMA Protocol Verbs Specification", RDMAC Consortium Draft Specification draft-hilland-iwarp-verbs-v1.0-RDMAC, April 2003
- [IPSEC] S. Kent et al., "Security Architecture for the Internet Protocol", RFC 2401, November 1998

**Deleted:** February

**Deleted:** I

**Deleted:** ANA Considerations

**Deleted:** The login operational keys RDMAExtensions, InitiatorRecvDataSegmentLength, and TargetRecvDataSegmentLength will be registered with IANA before this draft is approved to become an RFC.¶ References¶

**Formatted:** Bullets and Numbering

**Formatted:** Bullets and Numbering

**Deleted:** August

Deleted: February

Formatted: Bullets and Numbering

13 Appendix

13.1 iWARP Message Format for iSER

This section is for information only and is NOT part of the standard. It simply depicts the iWARP Message format for the various iSER Messages when the transport layer is TCP.

Formatted: Bullets and Numbering

13.1.1 iWARP Message Format for iSER Hello Message

The following figure depicts an iSER Hello Message encapsulated in an iWARP SendSE Message.

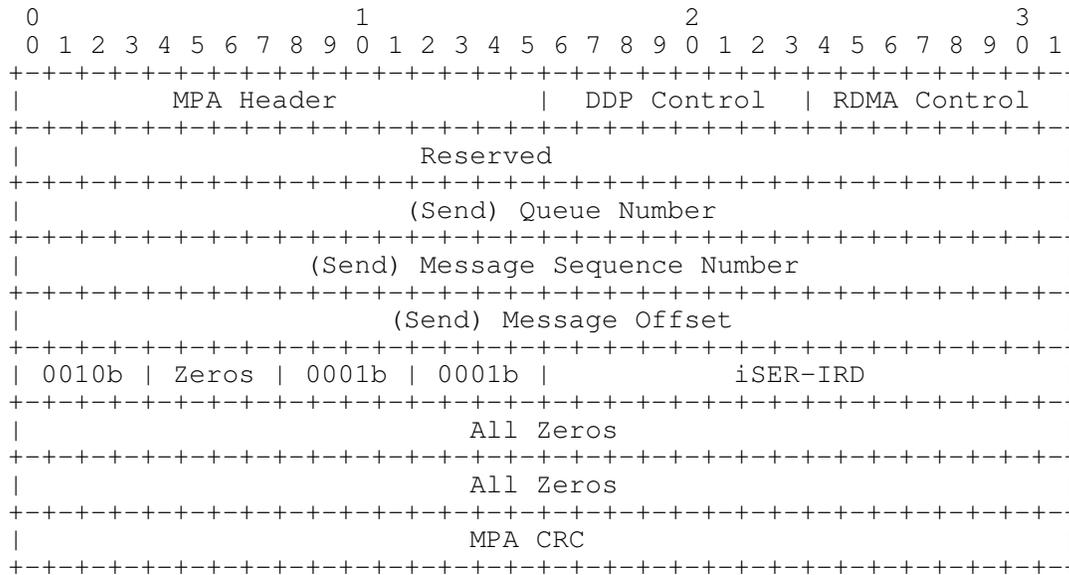


Figure 6 SendSE Message containing an iSER Hello Message

Formatted: Bullets and Numbering

Deleted: August

13.1.2 iWARP Message Format for iSER HelloReply Message

The following figure depicts an iSER HelloReply Message encapsulated in an iWARP SendSE Message. The Reject (REJ) flag is set to 0.

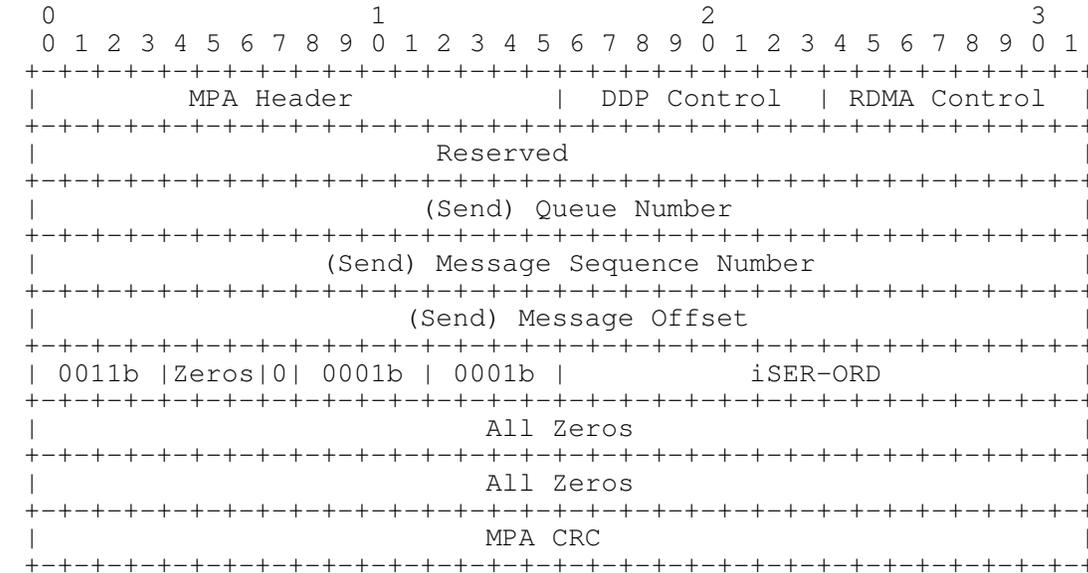


Figure 7 SendSE Message containing an iSER HelloReply Message

Formatted: Bullets and Numbering

Deleted: August

13.1.3 iWARP Message Format for SCSI Read Command PDU

The following figure depicts a SCSI Read Command PDU embedded in an iSER Message encapsulated in an iWARP SendSE Message. For this particular example, in the iSER header, the Write STag Valid flag is set to zero, the Read STag Valid flag is set to one, the Write STag field is set to all zeros, and the Read STag field contains a valid Read STag.

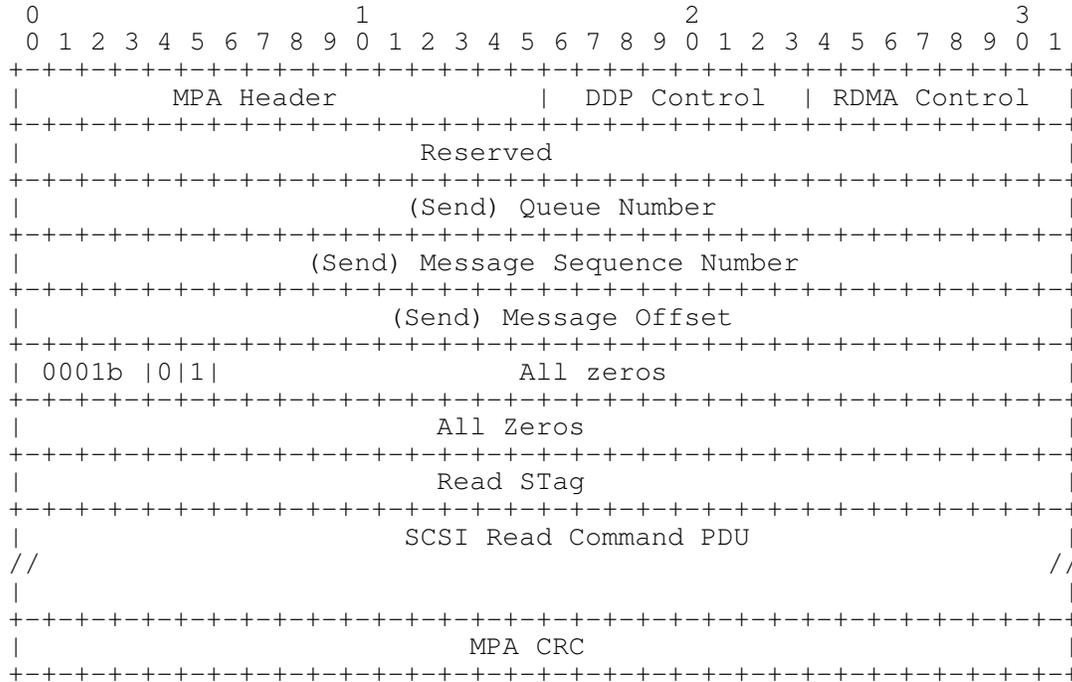


Figure 8 SendSE Message containing a SCSI Read Command PDU

Formatted: Bullets and Numbering

Deleted: August

13.1.4 iWARP Message Format for SCSI Read Data

The following figure depicts an iWARP RDMA Write Message carrying SCSI Read data in the payload:

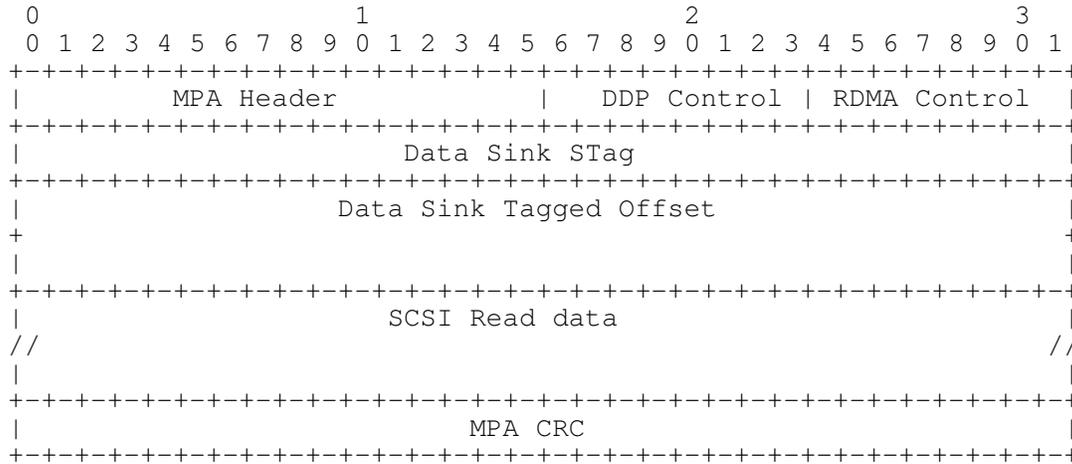


Figure 9 RDMA Write Message containing SCSI Read Data

Formatted: Bullets and Numbering

Deleted: August

13.1.5 iWARP Message Format for SCSI Write Command PDU

The following figure depicts a SCSI Write Command PDU embedded in an iSER Message encapsulated in an iWARP SendSE Message. For this particular example, in the iSER header, the Write STag Valid flag is set to one, the Read STag Valid flag is set to zero, the Write STag field contains a valid Write STag, and the Read STag field is set to all zeros since it is not used.

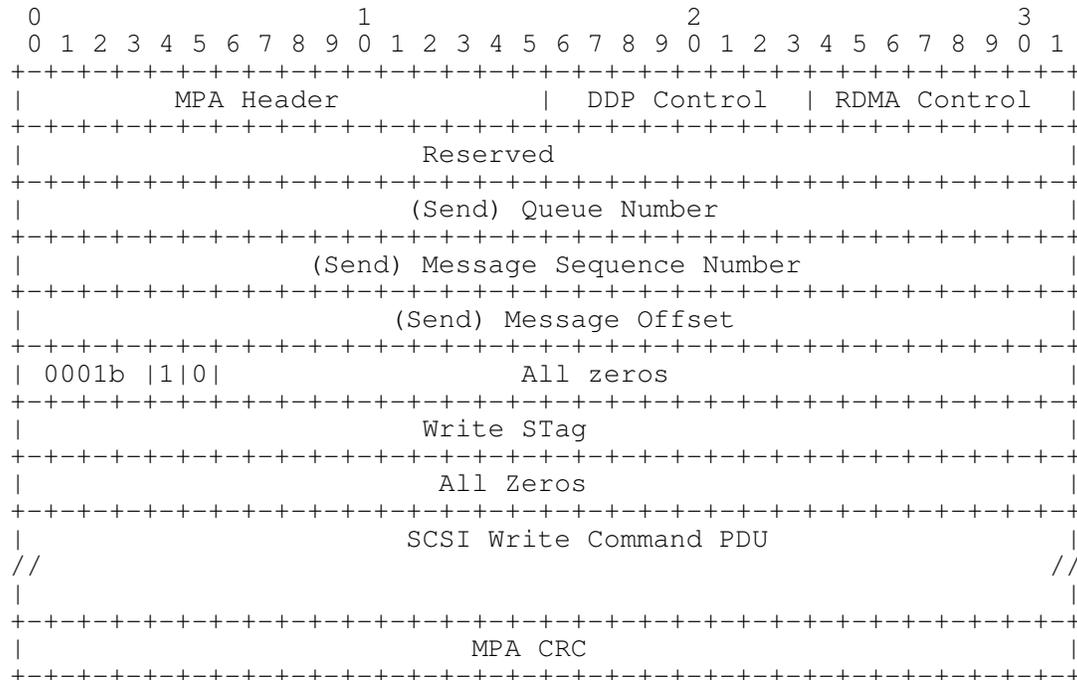


Figure 10 SendSE Message containing a SCSI Write Command PDU

Formatted: Bullets and Numbering

Deleted: August



13.1.7 iWARP Message Format for Solicited SCSI Write Data

The following figure depicts an iWARP RDMA Read Response Message carrying the solicited SCSI Write data in the payload:

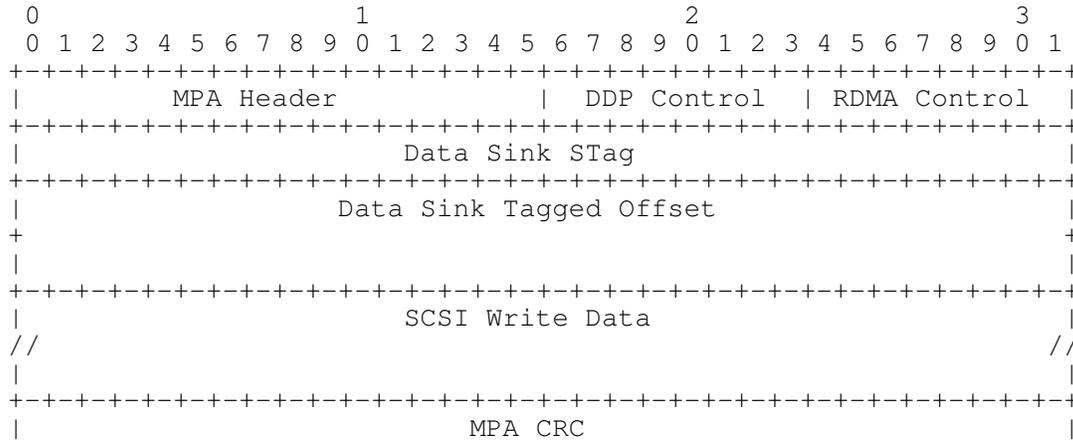


Figure 12 RDMA Read Response Message containing SCSI Write Data

Formatted: Bullets and Numbering

Deleted: August

13.1.8 iWARP Message Format for SCSI Response PDU

The following figure depicts a SCSI Response PDU embedded in an iSER Message encapsulated in an iWARP SendInvSE Message:

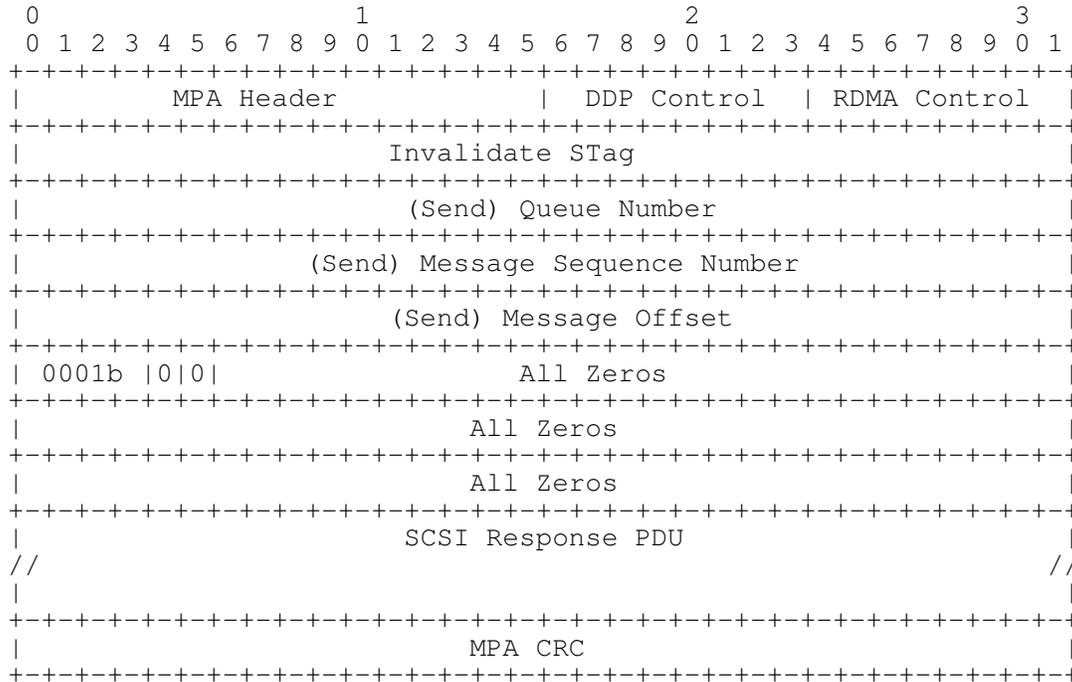


Figure 13 SendInvSE Message containing SCSI Response PDU

Deleted: February

Deleted: Author's

Formatted: Bullets and Numbering

## 14 Author's Address

Mallikarjun Chadalapaka  
Hewlett-Packard Company  
8000 Foothills Blvd.  
Roseville, CA 95747-5668, USA  
Phone: +1-916-785-5621  
Email: [cbm@rose.hp.com](mailto:cbm@rose.hp.com)

Uri Elzur  
Broadcom Corporation  
16215 Alton Parkway  
Irvine, California 92619-7013, USA  
Phone: +1-949-926-6432  
Email: [Uri@Broadcom.com](mailto:Uri@Broadcom.com)

John Hufferd  
IBM Corp.  
5600 Cottle Rd.  
San Jose, CA 95120, USA  
Phone: +1-408-256-0403  
Email: [hufferd@us.ibm.com](mailto:hufferd@us.ibm.com)

Mike Ko  
IBM Corp.  
650 Harry Rd.  
San Jose, CA 95120, USA  
Phone: +1-408-927-2085  
Email: [mako@us.ibm.com](mailto:mako@us.ibm.com)

Hemal Shah  
Intel Corporation  
MS AN1-PTL1  
1501 South Mopac Expressway, #400  
Austin, Texas 78746, USA  
Phone: +1-512-732-3963  
Email: [hemal.shah@intel.com](mailto:hemal.shah@intel.com)

Patricia Thaler  
Agilent Technologies, Inc.  
1101 Creekside Ridge Drive, #100  
M/S-RG10  
Roseville, CA 95678, USA  
Phone: +1-916-788-5662  
email: [pat\\_thaler@agilent.com](mailto:pat_thaler@agilent.com)

Deleted: August

15 Acknowledgments

~~This protocol was developed by a design team that, in addition to the authors, included Dwight Barron (HP), John Carrier (formerly from Adaptec), Ted Compton (EMC), Paul R. Culley (HP), Jeff Hilland (HP), Mike Krause (HP), Jim Pinkerton (Microsoft), Renato J. Recio (IBM), Julian Satran (IBM), Tom Talpey (Network Appliance), and Jim Wendt (HP).~~

Deleted: February

Formatted: Bullets and Numbering

Formatted: Body Text

Deleted: .  
Hewlett-Packard Company .  
20555 SH.249 .  
Houston, TX 77070-2698, USA .  
Phone: +1-281-514-2769 .  
Email: [Dwight.Barron@hp.com](mailto:Dwight.Barron@hp.com)

Deleted: .

Deleted: Inc. .  
691 S. Milpitas Blvd. .  
Milpitas, CA 95035, USA .  
Phone: +1-360-378-8526 .  
Email:  
[john\\_carrier@adaptec.com](mailto:john_carrier@adaptec.com)

Deleted: .

Deleted: Corporation .  
Research Triangle Park, NC  
27709, USA .  
Phone: +1-919-248-6075 .  
Email: [compton\\_ted@emc.com](mailto:compton_ted@emc.com)

Deleted: .  
Hewlett-Packard Company .  
20555 SH 249 .  
Houston, Tx. 77070-2698, USA  
Phone: +1-281-514-5543 .  
Email: [paul.culley@hp.com](mailto:paul.culley@hp.com)

Deleted: .

Deleted: Hewlett-Packard  
Company .  
20555 SH 249 .  
Houston, Tx. 77070-2698 ... [2]

Deleted: . ... [3]

Deleted: .

Deleted: Inc. . ... [4]

Deleted: .

Deleted: Corp. . ... [5]

Formatted: Default Paragraph Font

Deleted: .

Deleted: Corp. . ... [6]

Deleted: .

Deleted: . ... [7]

Deleted: Hewlett-Packard ... [8]

Deleted: August

Deleted: February

Formatted: Bullets and Numbering

16 Full Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in BCP 78, and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in BCP 78 and BCP 79.

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

Deleted: August

1	Definitions and Acronyms	7
1.1	Definitions	7
1.2	Acronyms	12
2	Introduction	15
2.1	Motivation	15
2.2	Architectural Goals	16
2.3	Protocol Overview	17
2.4	RDMA services and iSER	18
2.4.1	STag	18
2.4.2	Send	19
2.4.3	RDMA Write	19
2.4.4	RDMA Read	19
2.5	SCSI Read Overview	20
2.6	SCSI Write Overview	20
2.7	iSCSI/iSER Layering	20
3	Upper Layer Interface Requirements	22
3.1	Operational Primitives offered by iSER	22
3.1.1	Send_Control	22
3.1.2	Put_Data	23
3.1.3	Get_Data	23
3.1.4	Allocate_Connection_Resources	23
3.1.5	Deallocate_Connection_Resources	24
3.1.6	Enable_Datamover	24
3.1.7	Connection_Terminate	25
3.1.8	Notice_Key_Values	25
3.1.9	Deallocate_Task_Resources	25
3.2	Operational Primitives used by iSER	25
3.2.1	Control_Notify	26
3.2.2	Data_Completion_Notify	26
3.2.3	Data_ACK_Notify	26
3.2.4	Connection_Terminate_Notify	27
3.3	iSCSI Protocol Usage Requirements	27
4	Lower Layer Interface Requirements	29
4.1	Interactions with the iWARP Layer	29
4.2	Interactions with the Transport Layer	30
5	Connection Setup and Termination	31
5.1	iSCSI/iSER Connection Setup	31
5.1.1	Initiator Behavior	32
5.1.2	Target Behavior	34
5.1.3	iSER Hello Exchange	36
5.2	iSCSI/iSER Connection Termination	37
5.2.1	Normal Connection Termination at the Initiator	37
5.2.2	Normal Connection Termination at the Target	37
5.2.3	Termination without Logout Request/Response PDUs	38
6	Login/Text Operational Keys	40
6.1	HeaderDigest and DataDigest	40

6.2	MaxRecvDataSegmentLength	40
6.3	RDMAExtensions	40
6.4	TargetRecvDataSegmentLength	41
6.5	InitiatorRecvDataSegmentLength	42
6.6	OFMarker and IFMarker	42
6.7	MaxOutstandingUnexpectedPDUs	43
7	iSCSI PDU Considerations	44
7.1	iSCSI Data-Type PDU	44
7.2	iSCSI Control-Type PDU	45
7.3	iSCSI PDUs	45
7.3.1	SCSI Command	45
7.3.2	SCSI Response	47
7.3.3	Task Management Function Request/Response	48
7.3.4	SCSI Data-out	50
7.3.5	SCSI Data-in	50
7.3.6	Ready To Transfer (R2T)	53
7.3.7	Asynchronous Message	55
7.3.8	Text Request & Text Response	55
7.3.9	Login Request & Login Response	55
7.3.10	Logout Request & Logout Response	56
7.3.11	SNACK Request	56
7.3.12	Reject	56
7.3.13	NOP-Out & NOP-In	56
8	Flow Control and STag Management	58
8.1	Flow Control for RDMA Send Message Types	58
8.2	Flow Control for RDMA Read Resources	58
8.3	Flow Control for Control-Type PDUs from the Initiator	59
8.4	Flow Control for Control-Type PDUs from the Target	61
8.5	STag Management	61
8.5.1	Allocation of STags	61
8.5.2	Invalidation of STags	62
9	iSER Control and Data Transfer	64
9.1	iSER Header Format	64
9.2	iSER Header Format for iSCSI Control-Type PDU	64
9.3	iSER Header Format for iSER Hello Message	66
9.4	iSER Header Format for iSER HelloReply Message	67
9.5	SCSI Data Transfer Operations	68
9.5.1	SCSI Write Operation	68
9.5.2	SCSI Read Operation	69
9.5.3	Bidirectional Operation	69
10	iSER Error Handling and Recovery	70
10.1	Error Handling	70
10.1.1	Errors in the Transport Layer	70
10.1.2	Errors in the iWARP protocol suite	71
10.1.3	Errors in the iSER Layer	71
10.1.4	Errors in the iSCSI Layer	73

10.2	Error Recovery	75
10.2.1	SNACK Handling and PDU Recovery	75
10.2.2	Connection Recovery	76
11	Security Considerations	77
12	IANA Considerations	78
13	References	79
13.1	Normative References	79
13.2	Informative References	79
14	Appendix	80
14.1	iWARP Message Format for iSER	80
14.1.1	iWARP Message Format for iSER Hello Message	80
14.1.2	iWARP Message Format for iSER HelloReply Message	81
14.1.3	iWARP Message Format for SCSI Read Command PDU	82
14.1.4	iWARP Message Format for SCSI Read Data	83
14.1.5	iWARP Message Format for SCSI Write Command PDU	84
14.1.6	iWARP Message Format for RDMA Read Request	85
14.1.7	iWARP Message Format for Solicited SCSI Write Data	86
14.1.8	iWARP Message Format for SCSI Response PDU	87
15	Author's Address	88
16	Acknowledgments	89
17	Full Copyright Statement	91

---

**Page 88: [2] Deleted** **Mike Ko** **3/20/2005 4:29 PM**

Hewlett-Packard Company  
20555 SH 249  
Houston, Tx. 77070-2698, USA  
Phone: +1-281-514-9489  
Email: jeff.hilland@hp.com

---

**Page 88: [3] Deleted** **Mike Ko** **3/20/2005 4:29 PM**

Hewlett-Packard Company  
43LN  
19410 Homestead Road  
Cupertino, CA 95014, USA  
Phone: +1-408-447-3191  
Email: krause@cup.hp.com

-----Page Break-----

---

**Page 88: [4] Deleted** **Mike Ko** **3/20/2005 4:30 PM**

Inc.  
One Microsoft Way  
Redmond, WA, 98052, USA  
Email: jpink@windows.microsoft.com

---

**Page 88: [5] Deleted** **Mike Ko** **3/20/2005 4:30 PM**

Corp.  
11501 Burnett Road  
Austin, TX 78758, USA  
Phone: +1-512-838-3685  
Email: recio@us.ibm.com

---

**Page 88: [6] Deleted** **Mike Ko** **3/20/2005 4:31 PM**

Corp.  
Haifa Research Lab  
Haifa University Campus - Mount Carmel  
Haifa 31905, Israel  
Phone: +972-4-829-6264  
Email: Julian\_Satran@il.ibm.com

---

**Page 88: [7] Deleted**

**Mike Ko**

**3/20/2005 4:31 PM**

375 Totten Pond Road  
Waltham, MA 02451, USA  
Phone: +1-781-768-5329  
EMail: thomas.talpey@netapp.com

---

**Page 88: [8] Deleted**

**Mike Ko**

**3/20/2005 4:32 PM**

Hewlett-Packard Company  
8000 Foothills Boulevard MS 5668  
Roseville, CA 95747-5668, USA  
Phone: +1-916-785-5198  
Email: jim\_wendt@hp.com