

Internet Engineering Task Force (IETF)  
Request for Comments: 9134  
Category: Standards Track  
ISSN: 2070-1721

T. Bruylants  
intoPIX  
A. Descampe  
UCLouvain  
C. Damman  
intoPIX  
T. Richter  
Fraunhofer IIS  
October 2021

## RTP Payload Format for ISO/IEC 21122 (JPEG XS)

### Abstract

This document specifies a Real-Time Transport Protocol (RTP) payload format to be used for transporting video encoded with JPEG XS (ISO/IEC 21122). JPEG XS is a low-latency, lightweight image coding system. Compared to an uncompressed video use case, it allows higher resolutions and video frame rates while offering visually lossless quality, reduced power consumption, and encoding-decoding latency confined to a fraction of a video frame.

### Status of This Memo

This is an Internet Standards Track document.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has received public review and has been approved for publication by the Internet Engineering Steering Group (IESG). Further information on Internet Standards is available in Section 2 of RFC 7841.

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at <https://www.rfc-editor.org/info/rfc9134>.

### Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

### Table of Contents

1. Introduction
2. Conventions, Definitions, and Abbreviations
3. Media Format Description
  - 3.1. Image Data Structures
  - 3.2. Codestream
  - 3.3. Video Support Box and Color Specification Box
  - 3.4. JPEG XS Frame
4. RTP Payload Format
  - 4.1. RTP Packetization
  - 4.2. RTP Header Usage
  - 4.3. Payload Header Usage
  - 4.4. Payload Data
5. Traffic Shaping and Delivery Timing

- 6. Congestion Control Considerations
- 7. Payload Format Parameters
  - 7.1. Media Type Registration
- 8. SDP Parameters
  - 8.1. Mapping of Payload Type Parameters to SDP
  - 8.2. Usage with SDP Offer/Answer Model
- 9. IANA Considerations
- 10. Security Considerations
- 11. References
  - 11.1. Normative References
  - 11.2. Informative References
- Acknowledgments
- Authors' Addresses

## 1. Introduction

This document specifies a payload format for packetization of video signals encoded with JPEG XS [ISO21122-1] into the Real-time Transport Protocol (RTP) [RFC3550].

The JPEG XS coding system offers compression and recompression of image sequences with very moderate computational resources while remaining robust under multiple compression and decompression cycles as well as mixing of content sources, e.g., embedding of subtitles, overlays, or logos. Typical target compression ratios ensuring visually lossless quality are in the range of 2:1 to 10:1 depending on the nature of the source material. The latency that is introduced by the encoding-decoding process can be confined to a fraction of a video frame, typically between a small number of lines down to below a single line.

## 2. Conventions, Definitions, and Abbreviations

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

### Application Data Unit (ADU):

The unit of source data provided as payload to the transport layer. In this RTP payload definition, it corresponds to a single JPEG XS video frame.

### Color Specification (CS) box:

An ISO color specification box defined in [ISO21122-3] (JPEG XS Part 3) that includes color-related metadata required to correctly display JPEG XS video frames, such as color primaries, transfer characteristics, and matrix coefficients.

### End of Codestream (EOC) marker:

A marker that consists of the two bytes 0xff11 indicating the end of a JPEG XS codestream.

### JPEG XS codestream:

A sequence of bytes representing a compressed image formatted according to [ISO21122-1] (JPEG XS Part 1).

### JPEG XS codestream header:

A sequence of bytes, starting with an SOC marker, at the beginning of each JPEG XS codestream encoded in multiple markers and marker segments that does not carry entropy coded data, but metadata such as the video frame dimension and component precision.

### JPEG XS frame:

In the case of progressive video, a single JPEG XS picture segment. In the case of interlaced video, the concatenation of two JPEG XS picture segments.

### JPEG XS header segment:

The concatenation of a video support box [ISO21122-3], a color

specification box [ISO21122-3], and a JPEG XS codestream header.

JPEG XS picture segment:

The concatenation of a video support box [ISO21122-3], a color specification box [ISO21122-3], and a JPEG XS codestream.

JPEG XS stream:

A sequence of JPEG XS frames.

Marker:

A two-byte functional sequence that is part of a JPEG XS codestream starting with a 0xff byte and a subsequent byte defining its function.

Marker segment:

A marker along with a 16-bit marker size and payload data following the size.

Packetization unit:

A portion of an ADU whose boundaries coincide with boundaries of RTP packet payloads (excluding payload header), i.e., the first (or respectively, last) byte of a packetization unit is the first (or respectively, last) byte of an RTP packet payload (excluding its payload header).

SLH (SLice Header) marker:

A marker that represents a slice header, as defined in [ISO21122-1].

Slice:

The smallest independently decodable unit of a JPEG XS codestream, bearing in mind that it decodes to wavelet coefficients, which still require inverse wavelet filtering to give an image.

Start of a Codestream (SOC) marker:

A marker that consists of the two bytes 0xff10 indicating the start of a JPEG XS codestream. The SOC marker is considered an integral part of the JPEG XS codestream header.

Video Support (VS) box:

An ISO video support box, as defined in [ISO21122-3], that includes metadata required to play back a JPEG XS stream; such metadata could include its maximum bit rate, its subsampling structure, its buffer model, and its frame rate.

### 3. Media Format Description

This section explains the terminology and concepts used in this memo specific to JPEG XS as specified in [ISO21122-1], [ISO21122-2], and [ISO21122-3].

#### 3.1. Image Data Structures

JPEG XS is a low-latency, lightweight image coding system for coding continuous-tone grayscale or continuous-tone color digital images.

This coding system provides an efficient representation of image signals through the mathematical tool of wavelet analysis. The wavelet filter process separates each component into multiple bands, where each band consists of multiple coefficients describing the image signal of a given component within a frequency domain specific to the wavelet filter type, i.e., the particular filter corresponding to the band.

Wavelet coefficients are grouped into precincts, where each precinct includes all coefficients over all bands that contribute to a spatial region of the image.

One or multiple precincts are furthermore combined into slices consisting of an integer number of precincts. Precincts do not cross slice boundaries, and wavelet coefficients in precincts that are part

of different slices can be decoded independently of each other. However, note that the wavelet transformation runs across slice boundaries. A slice always extends over the full width of the image but may only cover parts of its height.

### 3.2. Codestream

A JPEG XS codestream is formed by (in the given order):

- \* a JPEG XS codestream header, which starts with a Start of Codestream (SOC) marker,
- \* one or more slices,
- \* an EOC marker to signal the end of the codestream.

The JPEG XS codestream format, including the definition of all markers, is further defined in [ISO21122-1]. It represents sample values of a single image, without any interpretation relative to a color space.

### 3.3. Video Support Box and Color Specification Box

While the information defined in the codestream is sufficient to reconstruct the sample values of one image, the interpretation of the samples remains undefined by the codestream itself. This interpretation is given by the video support box and the color specification box, which contain significant information to correctly play the JPEG XS stream. The layout and syntax of these boxes, together with their content, are defined in [ISO21122-3].

The video support box provides information on the maximum bit rate, the frame rate, the interlaced mode (progressive or interlaced), the subsampling image format, the informative timecode of the current JPEG XS frame, the profile, the level/sublevel used, and optionally the buffer model and the mastering display metadata.

Note that the profile and level/sublevel, specified respectively by the Ppnh and Plev fields [ISO21122-2], specify limits on the capabilities needed to decode the codestream and handle the output. Profiles represent a limit on the required algorithmic features and parameter ranges used in the codestream. The combination of level and sublevel defines a lower bound on the required throughput for a decoder in the image (or decoded) domain and the codestream (or coded) domain, respectively. The actual defined profiles and levels/sublevels, along with the associated values for the Ppnh and Plev fields, are defined in [ISO21122-2].

The color specification box indicates the color primaries, transfer characteristics, matrix coefficients, and video full range flag needed to specify the color space of the video stream.

### 3.4. JPEG XS Frame

The concatenation of a video support box, a color specification box, and a JPEG XS codestream forms a JPEG XS picture segment.

In the case of a progressive video stream, each JPEG XS frame consists of one single JPEG XS picture segment.

In the case of an interlaced video stream, each JPEG XS frame is made of two concatenated JPEG XS picture segments. The codestream of each picture segment corresponds exclusively to one of the two fields of the interlaced frame. Both picture segments SHALL contain identical boxes (i.e., the byte sequence that contains the concatenation of the video support box and the color specification box is exactly the same in both picture segments of the frame).

Note that the interlaced mode, as signaled by the frat field [ISO21122-3] in the video support box, indicates either progressive interlaced top-field-first or interlaced bottom-field-first mode.

Thus, in the case of interlaced content, its value SHALL also be identical in both picture segments.

#### 4. RTP Payload Format

This section specifies the payload format for JPEG XS streams over the Real-time Transport Protocol (RTP) [RFC3550].

In order to be transported over RTP, each JPEG XS stream is transported in a distinct RTP stream, identified by a distinct synchronization source (SSRC) [RFC3550].

A JPEG XS stream is divided into Application Data Units (ADUs), each ADU corresponding to a single JPEG XS frame.

##### 4.1. RTP Packetization

An ADU is made of several packetization units. If a packetization unit is bigger than the maximum size of an RTP packet payload, the unit is split into multiple RTP packet payloads, as illustrated in Figure 1. As seen there, each packet SHALL contain (part of) one, and only one, packetization unit. A packetization unit may extend over multiple packets. The payload of every packet SHALL have the same size (based, e.g., on the Maximum Transfer Unit of the network) with the possible exception of the last packet of a packetization unit. The boundaries of a packetization unit SHALL coincide with the boundaries of the payload of a packet (excluding the payload header), i.e., the first (or, respectively, last) byte of the packetization unit SHALL be the first (or, respectively, last) byte of the payload (excluding its header).

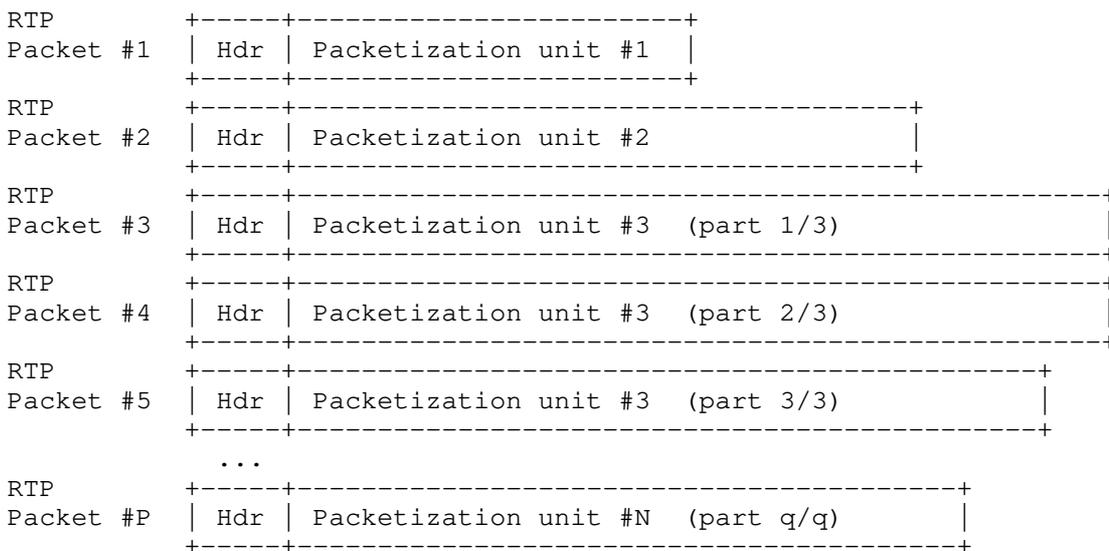


Figure 1: Example of ADU Packetization

There are two different packetization modes defined for this RTP payload format.

##### Codestream packetization mode:

In this mode, the packetization unit SHALL be the entire JPEG XS picture segment (i.e., codestream preceded by boxes). This means that a progressive frame will have a single packetization unit, while an interlaced frame will have two. The progressive case is illustrated in Figure 2.

##### Slice packetization mode:

In this mode, the packetization unit SHALL be the slice, i.e., there SHALL be data from no more than one slice per RTP packet. The first packetization unit SHALL be made of the JPEG XS header segment (i.e., the concatenation of the VS box, the CS box, and the JPEG XS codestream header). This first unit is then followed by successive units, each containing one and only one slice. The packetization unit containing the last slice of a JPEG XS

codestream SHALL also contain the EOC marker immediately following this last slice. This is illustrated in Figure 3. In the case of an interlaced frame, the JPEG XS header segment of the second field SHALL be in its own packetization unit.

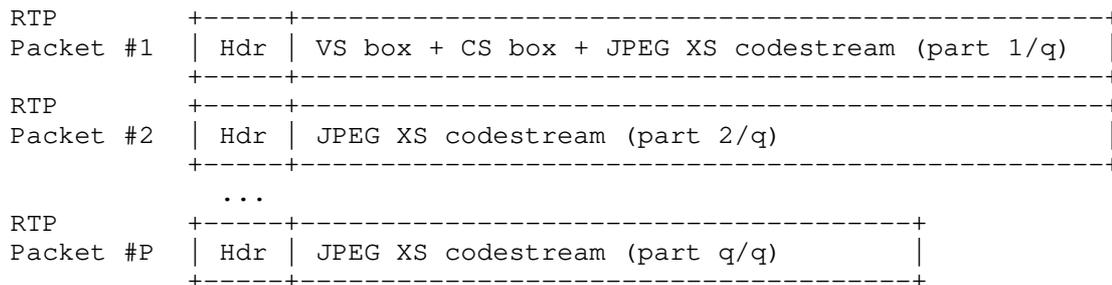


Figure 2: Example of Codestream Packetization Mode

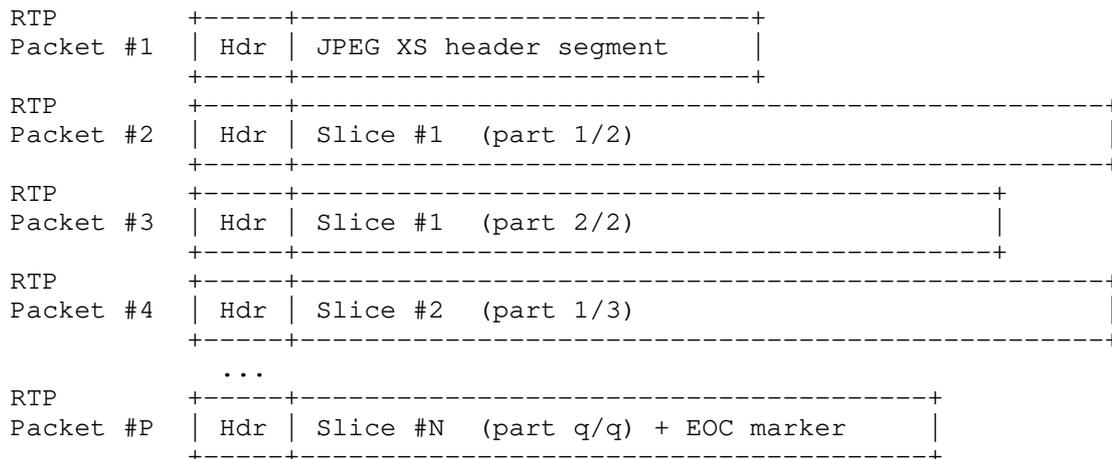



Figure 3: Example of Slice Packetization Mode

In a constant bitrate (CBR) scenario of JPEG XS, the codestream packetization mode guarantees that a JPEG XS RTP stream will produce both a constant number of bytes per video frame and a constant number of RTP packets per video frame. However, to provide similar guarantees with JPEG XS in a variable bitrate (VBR) mode or when using the slice packetization mode (for either CBR or VBR), additional mechanisms are needed. This can involve a constraint at the rate allocation stage in the JPEG XS encoder to impose a CBR at the slice level, the usage of padding data, or the insertion of empty RTP packets (i.e., an RTP packet whose payload data is empty). But, management of the amount of produced packets per video frame is application dependent and not a strict requirement of this RTP payload specification.

#### 4.2. RTP Header Usage

The format of the RTP header is specified in [RFC3550] and reprinted in Figure 4 for convenience. This RTP payload format uses the fields of the header in a manner consistent with that specification.

The RTP payload (and the settings for some RTP header bits) for packetization units are specified in Section 4.3.

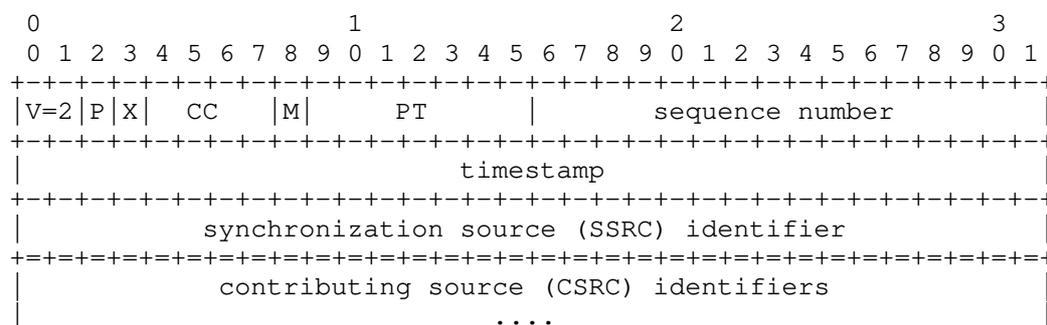



be used and K SHALL be set to 1. This is required because only the slice packetization mode supports out-of-order packet transmission. The K-bit value SHALL be identical for all packets of the RTP stream.

#### Last (L) [1 bit]:

The L bit is set to indicate the last packet of a packetization unit. As the end of the video frame also ends the packet containing the last unit of the video frame, the L bit is set whenever the M bit is set. In the codestream packetization mode, the L bit and M bit get an equivalent meaning, so they SHALL have identical values in each packet.

#### Interlaced information (I) [2 bits]:

These two I bits are used to indicate how the JPEG XS frame is scanned (progressive or interlaced). In case of an interlaced frame, they also indicate which JPEG XS picture segment the payload is part of (first or second).

00: The payload is progressively scanned.

01: This value is reserved for future use.

10: The payload is part of the first JPEG XS picture segment of an interlaced video frame. The height specified in the included JPEG XS codestream header is half of the height of the entire displayed image.

11: The payload is part of the second JPEG XS picture segment of an interlaced video frame. The height specified in the included JPEG XS codestream header is half of the height of the entire displayed image.

#### F counter [5 bits]:

The Frame (F) counter identifies the video frame number modulo 32 to which a packet belongs. Frame numbers are incremented by 1 for each video frame transmitted. The frame number, in addition to the timestamp, may help the decoder manage its input buffer and bring packets back into their natural order.

#### Slice and Extended Packet (SEP) counter [11 bits]:

The SEP counter is used differently depending on the packetization mode.

\* In the case of codestream packetization mode (K=0), this counter resets whenever the Packet counter resets (see Section 4.4) and increments by 1 whenever the Packet counter overruns.

\* In the case of slice packetization mode (K=1), this counter identifies the slice modulo 2047 to which the packet contributes. If the data belongs to the JPEG XS header segment, this field SHALL have its maximal value, namely 2047 = 0x07ff. Otherwise, it is the slice index modulo 2047. Slice indices are counted from 0 (corresponding to the top of the video frame).

#### P counter [11 bits]:

The Packet (P) counter identifies the packet number modulo 2048 within the current packetization unit. It is set to 0 at the start of the packetization unit and incremented by 1 for every subsequent packet (if any) belonging to the same unit. Practically, if codestream packetization mode is enabled, this field counts the packets within a JPEG XS picture segment and is extended by the SEP counter when it overruns. If slice packetization mode is enabled, this field counts the packets within a slice or within the JPEG XS header segment.

## 4.4. Payload Data

The payload data of a JPEG XS RTP stream consists of a concatenation

of multiple JPEG XS frames. Within the RTP stream, all of the video support boxes and all of the color specification boxes SHALL retain their respective layouts for each JPEG XS frame. Thus, each video support box in the RTP stream SHALL define the same sub boxes. The effective values in the boxes are allowed to change under the condition that their relative byte offsets SHALL NOT change.

Each JPEG XS frame is the concatenation of one or more packetization unit(s), as explained in Section 4.1. Figure 6 depicts this layout for a progressive video frame in the codestream packetization mode, Figure 7 depicts this layout for an interlaced video frame in the codestream packetization mode, Figure 8 depicts this layout for a progressive video frame in the slice packetization mode, and Figure 9 depicts this layout for an interlaced video frame in the slice packetization mode. The Frame counter value is not indicated because the value is constant for all packetization units of a given video frame.


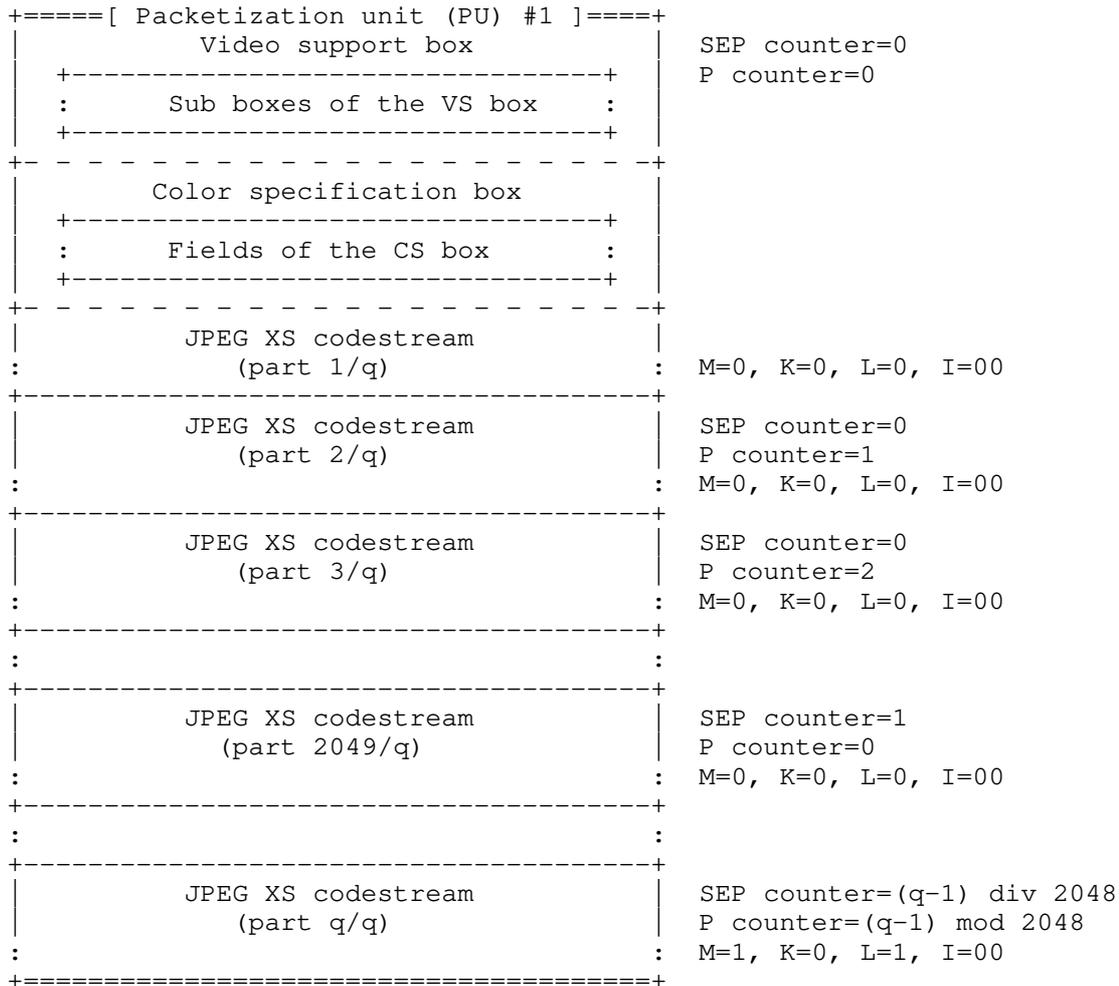


Figure 6: Example of JPEG XS Payload Data (Codestream Packetization Mode, Progressive Video Frame)

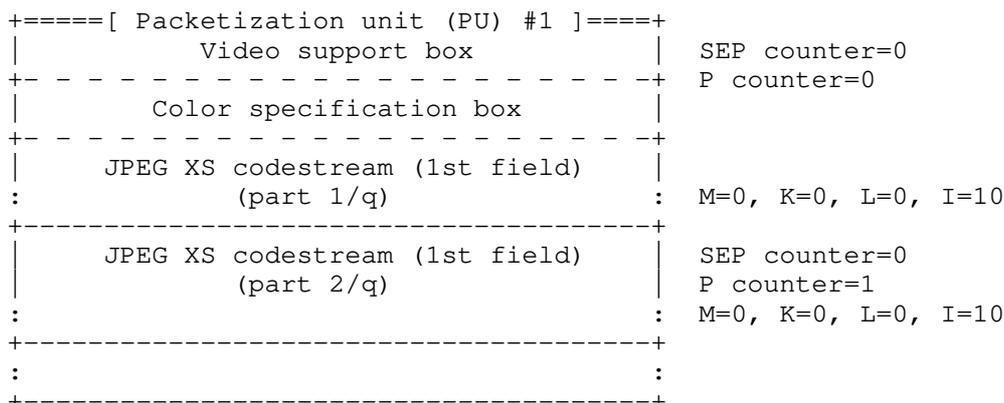

JPEG XS codestream (1st field) (part 2049/q)	SEP counter=1 P counter=0 M=0, K=0, L=0, I=10
JPEG XS codestream (1st field) (part q/q)	SEP counter=(q-1) div 2048 P counter=(q-1) mod 2048 M=1, K=0, L=1, I=10
=====[ PU #2 ]=====	
Video support box	SEP counter=0 P counter=0
Color specification box	
JPEG XS codestream (2nd field) (part 1/q)	M=0, K=0, L=0, I=11
JPEG XS codestream (2nd field) (part 2/q)	SEP counter=0 P counter=1 M=0, K=0, L=0, I=11
JPEG XS codestream (2nd field) (part q/q)	SEP counter=(q-1) div 2048 P counter=(q-1) mod 2048 M=1, K=0, L=1, I=11

Figure 7: Example of JPEG XS Payload Data (Codestream Packetization Mode, Interlaced Video Frame)

=====[ PU #1: JPEG XS Header segment ]====	
Video support box	SEP counter=0x07FF P counter=0
Color specification box	
JPEG XS codestream header	
Markers and marker segments	M=0, T=0, K=1, L=1, I=00
=====[ PU #2: Slice #1 ]=====	
SLH Marker	SEP counter=0 P counter=0
Entropy Coded Data	M=0, T=0, K=1, L=1, I=00
=====[ PU #3: Slice #2 ]=====	
Slice #2 (part 1/q)	SEP counter=1 P counter=0 M=0, T=0, K=1, L=0, I=00
Slice #2 (part 2/q)	SEP counter=1 P counter=1 M=0, T=0, K=1, L=0, I=00
Slice #2 (part q/q)	SEP counter=1 P counter=q-1 M=0, T=0, K=1, L=1, I=00
=====[ PU #N: Slice #(N-1) ]=====	
Slice #(N-1) (part 1/r)	SEP counter=N-2 P counter=0 M=0, T=0, K=1, L=0, I=00

	Slice #(N-1)		SEP counter=N-2
	(part r/r)		P counter=r-1
:	+ EOC marker	:	M=1, T=0, K=1, L=1, I=00
+=====+			

Figure 8: Example of JPEG XS Payload Data (Slice Packetization Mode, Progressive Video Frame)

+====[ PU #1: JPEG XS Hdr segment 1 ]====+		
	Video support box	SEP counter=0x07FF
	Color specification box	P counter=0
+-----+		
	JPEG XS codestream header 1	
	+-----+	
	: Markers and marker segments :	
	+-----+	M=0, T=0, K=1, L=1, I=10
+====[ PU #2: Slice #1 (1st field) ]====+		
	+-----+	SEP counter=0
	SLH Marker	P counter=0
	+-----+	
	: Entropy Coded Data :	
	+-----+	M=0, T=0, K=1, L=1, I=10
+====[ PU #3: Slice #2 (1st field) ]====+		
	Slice #2	SEP counter=1
	(part 1/q)	P counter=0
:		: M=0, T=0, K=1, L=0, I=10
+-----+		
	Slice #2	SEP counter=1
	(part 2/q)	P counter=1
:		: M=0, T=0, K=1, L=0, I=10
+-----+		
:		:
+-----+		
	Slice #2	SEP counter=1
	(part q/q)	P counter=q-1
:		: M=0, T=0, K=1, L=1, I=10
+=====+		
:		:
+==[ PU #N: Slice #(N-1) (1st field) ]==+		
	Slice #(N-1)	SEP counter=N-2
	(part 1/r)	P counter=0
:		: M=0, T=0, K=1, L=0, I=10
+-----+		
:		:
+-----+		
	Slice #(N-1)	SEP counter=N-2
	(part r/r)	P counter=r-1
:	+ EOC marker	: M=1, T=0, K=1, L=1, I=10
+=====+		
+====[ PU #N+1: JPEG XS Hdr segment 2 ]====+		
	Video support box	SEP counter=0x07FF
	Color specification box	P counter=0
+-----+		
	JPEG XS codestream header 2	
	+-----+	
	: Markers and marker segments :	
	+-----+	M=0, T=0, K=1, L=1, I=11
+====[ PU #N+2: Slice #1 (2nd field) ]====+		
	+-----+	SEP counter=0
	SLH Marker	P counter=0
	+-----+	
	: Entropy Coded Data :	
	+-----+	M=0, T=0, K=1, L=1, I=11
+====[ PU #N+3: Slice #2 (2nd field) ]====+		
	Slice #2	SEP counter=1
	(part 1/s)	P counter=0
:		: M=0, T=0, K=1, L=0, I=11
+-----+		

	Slice #2		SEP counter=1
	(part 2/s)		P counter=1
:		:	M=0, T=0, K=1, L=0, I=11
+-----+		+-----+	
	Slice #2		SEP counter=1
	(part s/s)		P counter=s-1
:		:	M=0, T=0, K=1, L=1, I=11
+-----+		+-----+	
	Slice #2		SEP counter=N-2
	(part 1/t)		P counter=0
:		:	M=0, T=0, K=1, L=0, I=11
+-----+		+-----+	
	Slice #(N-1)		SEP counter=N-2
	(part t/t)		P counter=t-1
:	+ EOC marker	:	M=1, T=0, K=1, L=1, I=11
+-----+		+-----+	

Figure 9: Example of JPEG XS Payload Data (Slice Packetization Mode, Interlaced Video Frame)

## 5. Traffic Shaping and Delivery Timing

In order to facilitate proper synchronization between senders and receivers, it is RECOMMENDED to implement traffic shaping and delivery timing in accordance with the Network Compatibility Model compliance definitions specified in [SMPTE2110-21]. In such a case, the session description SHALL signal the compliance with the media type parameter TP. The actual applied traffic shaping and timing delivery mechanism is outside the scope of this memo and does not influence the payload packetization.

## 6. Congestion Control Considerations

Congestion control for RTP SHALL be used in accordance with [RFC3550] and with any applicable RTP profile, e.g., RTP/AVP [RFC3551] or RTP/AVPF [RFC4585].

While JPEG XS is mainly designed to be used in controlled network environments, it can also be employed in best-effort network environments, like the Internet. However, in this case, the users of this payload format SHALL monitor packet loss to ensure that the packet loss rate is within acceptable parameters. This can be achieved, for example, by means of RTP Control Protocol (RTCP) Feedback for Congestion Control [RFC8888].

In addition, [RFC8083] is an update to [RFC3550] that defines criteria for when one is required to stop sending RTP Packet Streams and for when applications implementing this standard SHALL comply with it.

[RFC8085] provides additional information on the best practices for applying congestion control to UDP streams.

## 7. Payload Format Parameters

This section specifies the required and optional parameters of the payload format and/or the RTP stream. All parameters are declarative, meaning that the information signaled by the parameters is also present in the payload data, namely in the payload header (see Section 4.3) or in the JPEG XS header segment [ISO21122-1] [ISO21122-3]. When provided, their respective values SHALL be consistent with the payload.

### 7.1. Media Type Registration

This registration is done using the template defined in [RFC6838] and following [RFC4855].

The receiver SHALL ignore any unrecognized parameter.

Type name:  
video

Subtype name:  
jxsv

Required parameters:

rate: The RTP timestamp clock rate. Applications using this payload format SHALL use a value of 90000.

packetmode: This parameter specifies the configured packetization mode as defined by the packetization mode (K) bit in the payload header of Section 4.3. This value SHALL be equal to the K-bit value configured in the RTP stream (i.e., 0 for codestream or 1 for slice).

Optional parameters:

transmode: This parameter specifies the configured transmission mode as defined by the Transmission mode (T) bit in the payload header of Section 4.3. If specified, this value SHALL be equal to the T-bit value configured in the RTP stream (i.e., 0 for out-of-order-allowed or 1 for sequential-only). If not specified, a value 1 (sequential-only) SHALL be assumed and the T bit SHALL be set to 1.

profile: The JPEG XS profile [ISO21122-2] in use. Any white space Unicode character in the profile name SHALL be omitted. Examples of valid profile names are 'Main444.12' or 'High444.12'.

level: The JPEG XS level [ISO21122-2] in use. Any white space Unicode character in the level name SHALL be omitted. Examples of valid levels are '2k-1' or '4k-2'.

sublevel: The JPEG XS sublevel [ISO21122-2] in use. Any white space Unicode character in the sublevel name SHALL be omitted. Examples of valid sublevels are 'Sublev3bpp' or 'Sublev6bpp'.

depth: Determines the number of bits per sample. This is an integer with typical values including 8, 10, 12, and 16.

width: Determines the number of pixels per line. This is an integer between 1 and 32767, inclusive.

height: Determines the number of lines per video frame. This is an integer between 1 and 32767, inclusive.

exactframerate: Signals the video frame rate in frames per second. Integer frame rates SHALL be signaled as a single decimal number (e.g., "25") whilst non-integer frame rates SHALL be signaled as a ratio of two integer decimal numbers separated by a "forward-slash" character (e.g., "30000/1001"), utilizing the numerically smallest numerator value possible.

interlace: If this parameter name is present, it indicates that the video is interlaced, or that the video is Progressive segmented Frame (PsF). If this parameter name is not present, the progressive video format SHALL be assumed.

segmented: If this parameter name is present, and the interlace parameter name is also present, then the video is a Progressive segmented Frame (PsF). Signaling of this parameter without the interlace parameter is forbidden.

sampling: Signals the color difference signal sub-sampling structure.

Signals utilizing the non-constant luminance Y'C'B C'R signal format of [BT.601-7], [BT.709-6], [BT.2020-2], or [BT.2100-2] SHALL use the appropriate one of the following values for the Media Type Parameter "sampling":

YCbCr-4:4:4 (4:4:4 sampling)  
YCbCr-4:2:2 (4:2:2 sampling)  
YCbCr-4:2:0 (4:2:0 sampling)

Signals utilizing the Constant Luminance Y'C C'BC C'RC signal format of [BT.2020-2] SHALL use the appropriate one of the following values for the Media Type Parameter "sampling":

CLYCbCr-4:4:4 (4:4:4 sampling)  
CLYCbCr-4:2:2 (4:2:2 sampling)  
CLYCbCr-4:2:0 (4:2:0 sampling)

Signals utilizing the constant intensity I CT CP signal format of [BT.2100-2] SHALL use the appropriate one of the following values for the Media Type Parameter "sampling":

ICtCp-4:4:4 (4:4:4 sampling)  
ICtCp-4:2:2 (4:2:2 sampling)  
ICtCp-4:2:0 (4:2:0 sampling)

Signals utilizing the 4:4:4 R' G' B' or RGB signal format (such as that of [BT.601-7], [BT.709-6], [BT.2020-2], [BT.2100-2], [SMPTE2065-1], or [SMPTE2065-3]) SHALL use the following value for the Media Type Parameter "sampling":

RGB (RGB or R' G' B' samples)

Signals utilizing the 4:4:4 X' Y' Z' signal format (such as defined in [SMPTE428-1]) SHALL use the following value for the Media Type Parameter "sampling":

XYZ (X' Y' Z' samples)

Key signals as defined in [SMPTE157] SHALL use the value key for the Media Type Parameter "sampling". The key signal is represented as a single component:

KEY (Samples of the key signal)

Signals utilizing a color sub-sampling other than what is defined here SHALL use the following value for the Media Type Parameter "sampling":

UNSPECIFIED (Sampling signaled by the payload)

colorimetry: Specifies the system colorimetry used by the image samples. Valid values and their specification are the following:

BT601-5: [BT.601-5].

BT709-2: [BT.709-2].

SMPTE240M: [SMPTE240M].

BT601: [BT.601-7].

BT709: [BT.709-6].

BT2020: [BT.2020-2].

BT2100: [BT.2100-2], Table 2 titled "System colorimetry".

ST2065-1: Academy Color Encoding Specification (ACES)

[SMPTE2065-1].

- ST2065-3: Academy Density Exchange Encoding (ADX)  
[SMPTE2065-3].
- XYZ: [ISO11664-1], section titled "1931 Observer".
- UNSPECIFIED: Colorimetry is signaled in the payload by the color specification box of [ISO21122-3], or it must be manually coordinated between sender and receiver.

Signals utilizing the [BT.2100-2] colorimetry SHOULD also signal the representational range using the optional parameter RANGE defined below. Signals utilizing the UNSPECIFIED colorimetry might require manual coordination between the sender and the receiver.

TCS: Transfer Characteristic System. This parameter specifies the transfer characteristic system of the image samples. Valid values and their specification are the following:

- SDR: Standard Dynamic Range video streams that utilize the Optical Electrical Transfer Function (OETF) of [BT.709-6] or [BT.2020-2]. Such streams SHALL be assumed to target the Electro-Optical Transfer Function (EOTF) specified in [BT.1886-0].
- PQ: High dynamic range video streams that utilize the Perceptual Quantization system of [BT.2100-2].
- HLG: High dynamic range video streams that utilize the Hybrid Log-Gamma system of [BT.2100-2].
- UNSPECIFIED: Video streams whose transfer characteristics are signaled by the payload as specified in [ISO21122-3], or that must be manually coordinated between sender and receiver.

RANGE: This parameter SHOULD be used to signal the encoding range of the sample values within the stream. When paired with [BT.2100-2] colorimetry, this parameter has two allowed values, NARROW and FULL, corresponding to the ranges specified in TABLE 9 of [BT.2100-2]. In any other context, this parameter has three allowed values: NARROW, FULLPROTECT, and FULL, which correspond to the ranges specified in [SMPTE2077]. In the absence of this parameter, and for all but the UNSPECIFIED colorimetry, NARROW SHALL be the assumed value. When paired with the UNSPECIFIED colorimetry, FULL SHALL be the default assumed value.

Encoding considerations:

This media type is framed in RTP and contains binary data; see Section 4.8 of [RFC6838].

Security considerations:

See the Security Considerations section of RFC 9134.

Interoperability considerations:

None

Published specification:

See the References section of RFC 9134.

Applications that use this media type:

Any application that transmits video over RTP (like SMPTE ST 2110).

Fragment identifier considerations:

N/A

Additional information:

None

Person & email address to contact for further information:

T. Bruylants <rtp@intopix.com> and T. Richter <jpeg-xs-techsupport@iis.fraunhofer.de>.

Intended usage:

COMMON

Restrictions on usage:

This media type depends on RTP framing; hence, it is only defined for transfer via RTP [RFC3550].

Author:

See the Authors' Addresses section of RFC 9134.

Change controller:

IETF Audio/Video Transport Working Group delegated from the IESG.

## 8. SDP Parameters

A mapping of the parameters into the Session Description Protocol (SDP) [RFC8866] is provided for applications that use SDP.

### 8.1. Mapping of Payload Type Parameters to SDP

The media type video/jxsv string is mapped to fields in the Session Description Protocol (SDP) [RFC8866] as follows:

The media type ("video") goes in SDP "m=" as the media name.

The media subtype ("jxsv") goes in SDP "a=rtpmap" as the encoding name, followed by a slash ("/") and the required parameter "rate" corresponding to the RTP timestamp clock rate (which for the payload format defined in this document SHALL be 90000).

The required parameter "packetmode" and any of the additional optional parameters, as described in Section 7.1, go in the SDP media format description, being the "a=fmtp" attribute (Format Parameters), by copying them directly from the media type string as a semicolon-separated list of parameter=value pairs.

All parameters of the media format SHALL correspond to the parameters of the payload. In case of discrepancies between payload parameter values and SDP fields, the values from the payload data SHALL prevail.

The receiver SHALL ignore any parameter that is not defined in Section 7.1.

An example SDP mapping for JPEG XS video is as follows:

```
m=video 30000 RTP/AVP 112
a=rtpmap:112 jxsv/90000
a=fmtp:112 packetmode=0;sampling=YCbCr-4:2:2;
           width=1920;height=1080;depth=10;
           colorimetry=BT709;TCS=SDR;RANGE=FULL;TP=2110TPNL
```

In this example, a JPEG XS RTP stream is to be sent to UDP destination port 30000, with an RTP dynamic payload type of 112 and a media clock rate of 90000 Hz. Note that the "a=fmtp:" line has been wrapped to fit this page and will be a single long line in the SDP file. This example includes the TP parameter (as specified in Section 5).

### 8.2. Usage with SDP Offer/Answer Model

When JPEG XS is offered over RTP using SDP in an offer/answer model

[RFC3264] for negotiation for unicast usage, the following limitations and rules apply:

The "a=fmtp" attribute SHALL be present specifying the required parameter "packetmode" and MAY specify any of the optional parameters, as described in Section 7.1.

All parameters in the "a=fmtp" attribute indicate sending capabilities (i.e., properties of the payload).

An answerer of the SDP is required to support all parameters and values of the parameters provided by the offerer; otherwise, the answerer SHALL reject the session. It falls on the offerer to use values that are expected to be supported by the answerer. If the answerer accepts the session, it SHALL reply with the exact same parameter values in the "a=fmtp" attribute as they were initially offered.

The same RTP payload type number used in the offer SHOULD be used in the answer, as specified in [RFC3264].

## 9. IANA Considerations

IANA has registered the media type registration "video/jxsv" as specified in Section 7.1. The media type has also been added to the IANA registry for "RTP Payload Format Media Types" <<https://www.iana.org/assignments/rtp-parameters>>.

## 10. Security Considerations

RTP packets using the payload format defined in this memo are subject to the security considerations discussed in [RFC3550] and in any applicable RTP profile such as RTP/AVP [RFC3551], RTP/AVPF [RFC4585], RTP/SAVP [RFC3711], or RTP/SAVPF [RFC5124]. This implies that confidentiality of the media streams is achieved by encryption.

However, as "Securing the RTP Framework: Why RTP Does Not Mandate a Single Media Security Solution" [RFC7202] discusses, it is not an RTP payload format's responsibility to discuss or mandate what solutions are used to meet the basic security goals like confidentiality, integrity, and source authenticity for RTP in general. This responsibility lies on anyone using RTP in an application. They can find guidance on available security mechanisms and important considerations in "Options for Securing RTP Sessions" [RFC7201]. Applications SHOULD use one or more appropriate strong security mechanisms.

Implementations of this RTP payload format need to take appropriate security considerations into account. It is important for the decoder to be robust against malicious or malformed payloads and ensure that they do not cause the decoder to overrun its allocated memory or otherwise misbehave. An overrun in allocated memory could lead to arbitrary code execution by an attacker. The same applies to the encoder, even though problems in encoders are typically rarer.

This payload format and the JPEG XS encoding do not exhibit any substantial non-uniformity, either in output or in complexity to perform the decoding operation; thus, they are unlikely to pose a denial-of-service threat due to the receipt of pathological datagrams.

This payload format and the JPEG XS encoding do not contain code that is executable.

It is important to note that high-definition (HD) or ultra-high-definition (UHD) video that is encoded with JPEG XS can have significant bandwidth requirements (typically more than 1 Gbps for UHD video, especially if using high framerate). This is sufficient to cause potential for denial of service if transmitted onto most currently available Internet paths.

Accordingly, if best-effort service is being used, users of this payload format SHALL monitor packet loss to ensure that the packet loss rate is within acceptable parameters. Packet loss is considered acceptable if a TCP flow across the same network path, and experiencing the same network conditions, would achieve an average throughput, measured on a reasonable timescale, that is not less than the RTP flow is achieving. This condition can be satisfied by implementing congestion control mechanisms to adapt the transmission rate (or the number of layers subscribed for a layered multicast session) or by arranging for a receiver to leave the session if the loss rate is unacceptably high.

This payload format may also be used in networks that provide quality-of-service guarantees. If enhanced service is being used, receivers SHOULD monitor packet loss to ensure that the service that was requested is actually being delivered. If it is not, then they SHOULD assume that they are receiving best-effort service and behave accordingly.

## 11. References

### 11.1. Normative References

- [ISO21122-1] ISO/IEC, "Information technology - JPEG XS low-latency lightweight image coding system - Part 1: Core coding system", ISO/IEC IS 21122-1.
- [ISO21122-2] ISO/IEC, "Information technology - JPEG XS low-latency lightweight image coding system - Part 2: Profiles and buffer models", ISO/IEC IS 21122-2.
- [ISO21122-3] ISO/IEC, "Information technology - JPEG XS low-latency lightweight image coding system - Part 3: Transport and container formats", ISO/IEC IS 21122-3.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3264] Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol (SDP)", RFC 3264, DOI 10.17487/RFC3264, June 2002, <<https://www.rfc-editor.org/info/rfc3264>>.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, RFC 3550, DOI 10.17487/RFC3550, July 2003, <<https://www.rfc-editor.org/info/rfc3550>>.
- [RFC3551] Schulzrinne, H. and S. Casner, "RTP Profile for Audio and Video Conferences with Minimal Control", STD 65, RFC 3551, DOI 10.17487/RFC3551, July 2003, <<https://www.rfc-editor.org/info/rfc3551>>.
- [RFC4855] Casner, S., "Media Type Registration of RTP Payload Formats", RFC 4855, DOI 10.17487/RFC4855, February 2007, <<https://www.rfc-editor.org/info/rfc4855>>.
- [RFC6838] Freed, N., Klensin, J., and T. Hansen, "Media Type Specifications and Registration Procedures", BCP 13, RFC 6838, DOI 10.17487/RFC6838, January 2013, <<https://www.rfc-editor.org/info/rfc6838>>.
- [RFC8083] Perkins, C. and V. Singh, "Multimedia Congestion Control: Circuit Breakers for Unicast RTP Sessions", RFC 8083, DOI 10.17487/RFC8083, March 2017, <<https://www.rfc-editor.org/info/rfc8083>>.

- [RFC8085] Eggert, L., Fairhurst, G., and G. Shepherd, "UDP Usage Guidelines", BCP 145, RFC 8085, DOI 10.17487/RFC8085, March 2017, <<https://www.rfc-editor.org/info/rfc8085>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8866] Begen, A., Kyzivat, P., Perkins, C., and M. Handley, "SDP: Session Description Protocol", RFC 8866, DOI 10.17487/RFC8866, January 2021, <<https://www.rfc-editor.org/info/rfc8866>>.

## 11.2. Informative References

- [BT.1886-0] ITU-R, "Reference electro-optical transfer function for flat panel displays used in HDTV studio production", ITU-R Recommendation BT.1886-0, March 2011, <<https://www.itu.int/rec/R-REC-BT.1886-0-201103-I/en>>.
- [BT.2020-2] ITU-R, "Parameter values for ultra-high definition television systems for production and international programme exchange", ITU-R Recommendation BT.2020-2, October 2015, <<https://www.itu.int/rec/R-REC-BT.2020-2-201510-I/en>>.
- [BT.2100-2] ITU-R, "Image parameter values for high dynamic range television for use in production and international programme exchange", ITU-R Recommendation BT.2100-2, July 2018, <<https://www.itu.int/rec/R-REC-BT.2100-2-201807-I/en>>.
- [BT.601-5] ITU-R, "Studio encoding parameters of digital television for standard 4:3 and wide screen 16:9 aspect ratios", ITU-R Recommendation BT.601-5, October 1995, <<https://www.itu.int/rec/R-REC-BT.601-5-199510-S/en>>.
- [BT.601-7] ITU-R, "Studio encoding parameters of digital television for standard 4:3 and wide screen 16:9 aspect ratios", ITU-R Recommendation BT.601-7, March 2011, <<https://www.itu.int/rec/R-REC-BT.601-7-201103-I/en>>.
- [BT.709-2] ITU-R, "Parameter values for the HDTV standards for production and international programme exchange", ITU-R Recommendation BT.709-2, October 1995, <<https://www.itu.int/rec/R-REC-BT.709-2-199510-S/en>>.
- [BT.709-6] ITU-R, "Parameter values for the HDTV standards for production and international programme exchange", ITU-R Recommendation BT.709-6, June 2015, <<https://www.itu.int/rec/R-REC-BT.709-6-201506-I/en>>.
- [ISO11664-1] ISO/CIE, "Colorimetry - Part 1: CIE standard colorimetric observers", ISO/CIE IS 11664-1:2019, June 2019, <<https://www.iso.org/standard/74164.html>>.
- [RFC3711] Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol (SRTP)", RFC 3711, DOI 10.17487/RFC3711, March 2004, <<https://www.rfc-editor.org/info/rfc3711>>.
- [RFC4175] Gharai, L. and C. Perkins, "RTP Payload Format for Uncompressed Video", RFC 4175, DOI 10.17487/RFC4175, September 2005, <<https://www.rfc-editor.org/info/rfc4175>>.
- [RFC4585] Ott, J., Wenger, S., Sato, N., Burmeister, C., and J. Rey,

"Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/AVPF)", RFC 4585, DOI 10.17487/RFC4585, July 2006, <<https://www.rfc-editor.org/info/rfc4585>>.

[RFC5124] Ott, J. and E. Carrara, "Extended Secure RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/SAVPF)", RFC 5124, DOI 10.17487/RFC5124, February 2008, <<https://www.rfc-editor.org/info/rfc5124>>.

[RFC7201] Westerlund, M. and C. Perkins, "Options for Securing RTP Sessions", RFC 7201, DOI 10.17487/RFC7201, April 2014, <<https://www.rfc-editor.org/info/rfc7201>>.

[RFC7202] Perkins, C. and M. Westerlund, "Securing the RTP Framework: Why RTP Does Not Mandate a Single Media Security Solution", RFC 7202, DOI 10.17487/RFC7202, April 2014, <<https://www.rfc-editor.org/info/rfc7202>>.

[RFC8888] Sarker, Z., Perkins, C., Singh, V., and M. Ramalho, "RTP Control Protocol (RTCP) Feedback for Congestion Control", RFC 8888, DOI 10.17487/RFC8888, January 2021, <<https://www.rfc-editor.org/info/rfc8888>>.

[SMPTE157] SMPTE, "SMPTE Recommended Practice - Key and Alpha Signals", SMPTE RP 157:2012, DOI 10.1109/ICPST.1998.729044, November 2012, <<https://ieeexplore.ieee.org/document/7290447>>.

[SMPTE2065-1] SMPTE, "SMPTE Standard - Academy Color Encoding Specification (ACES)", SMPTE ST 2065-1:2021, DOI 10.5594/SMPTE.ST2065-1.2021, January 2021, <<https://ieeexplore.ieee.org/document/9343931>>.

[SMPTE2065-3] SMPTE, "SMPTE Standard - Academy Density Exchange Encoding (ADX) - Encoding Academy Printing Density (APD) Values", SMPTE ST 2065-3:2020, DOI 10.5594/SMPTE.ST2065-3.2020, November 2020, <<https://ieeexplore.ieee.org/document/9286953>>.

[SMPTE2077] SMPTE, "SMPTE Recommended Practice - Full-Range Image Mapping", SMPTE RP 2077:2013, DOI 10.5594/SMPTE.RP2077.2013, November 2013, <<https://ieeexplore.ieee.org/document/7290588>>.

[SMPTE2110-21] SMPTE, "SMPTE Standard - Professional Media Over Managed IP Networks: Traffic Shaping and Delivery Timing for Video", SMPTE ST 2110-21:2017, DOI 10.5594/SMPTE.ST2110-21.2017, November 2017, <<https://ieeexplore.ieee.org/document/8165971>>.

[SMPTE240M] SMPTE, "SMPTE Standard - For Television - 1125-Line High-Definition Production Systems - Signal Parameters", SMPTE ST 240M:1999, DOI 10.5594/SMPTE.ST240.1999, November 1999, <<https://ieeexplore.ieee.org/document/7291461?arnumber=7291461>>.

[SMPTE428-1] SMPTE, "SMPTE Standard - D-Cinema Distribution Master - Image Characteristics", SMPTE ST 428-1:2019, DOI 10.5594/SMPTE.ST428-1.2019, March 2019, <<https://ieeexplore.ieee.org/document/8709077>>.

## Acknowledgments

The authors would like to thank the following people for their

valuable contributions to this memo: Sbastien Lugan, Arnaud Germain, Alexandre Willme, Gaël Rouvroy, Siegfried Foessel, and Jean-Baptiste Lorent.

#### Authors' Addresses

Tim Bruylants  
intoPIX S.A.  
Rue Emile Francqui, 9  
1435 Mont-Saint-Guibert  
Belgium

Phone: +32 10 23 84 70  
Email: t.bruylants@intopix.com  
URI: <https://www.intopix.com/>

Antonin Descampe  
Universit catholique de Louvain  
bte L2.03.02  
Ruelle de la Lanterne Magique, 14  
1348 Louvain-la-Neuve  
Belgium

Phone: +32 10 47 27 87  
Email: antonin.descampe@uclouvain.be  
URI: <https://uclouvain.be/antonin.descampe>

Corentin Damman  
intoPIX S.A.  
Rue Emile Francqui, 9  
1435 Mont-Saint-Guibert  
Belgium

Phone: +32 10 23 84 70  
Email: c.damman@intopix.com  
URI: <https://www.intopix.com/>

Thomas Richter  
Fraunhofer IIS  
Am Wolfsmantel 33  
91048 Erlangen  
Germany

Phone: +49 9131 776 5126  
Email: thomas.richter@iis.fraunhofer.de  
URI: <https://www.iis.fraunhofer.de/>