

Mapping of Airline Reservation, Ticketing,  
and Messaging Traffic over IP

Status of this Memo

This memo provides information for the Internet community. It does not specify an Internet standard of any kind. Distribution of this memo is unlimited.

Copyright Notice

Copyright (C) The Internet Society (1998). All Rights Reserved.

Security Disclaimer:

This document fails to adequately address security concerns. The protocol itself does not include any security mechanisms. The document notes that traffic can be authenticated based on external mechanisms that use static identifiers or what are apparently clear-text passwords, neither of which provide sound security. The document notes in general terms that traffic can be secured using IPSEC, but leaves this form of sound security strictly optional.

Abstract

This memo specifies a protocol for the encapsulation of the airline specific protocol over IP.

Table of Contents

1. INTRODUCTION	2
2. TERMINOLOGY & ACRONYMS	4
3. LAYERING	7
4. TRAFFIC IDENTIFICATION	7
5. TCP PORT ALLOCATION	8
6. MATIP SESSION ESTABLISHMENT	8
7. OVERALL PACKET FORMAT FOR TYPE A & TYPE B	9
8. MATIP FORMAT FOR TYPE A CONVERSATIONAL TRAFFIC	10
8.1 Control Packet Format	10
8.1.1 Session Open format (SO)	10
8.1.2 Open Confirm format (OC)	12
8.1.3 Session Close (SC)	14
8.2 Data Packet Format	14

9. MATIP FORMAT FOR TYPE A HOST-TO-HOST TRAFFIC	15
9.1 Control Packet Format	15
9.1.1 Session Open format (SO)	15
9.1.2 Open Confirm format (OC)	17
9.1.3 Session Close (SC)	17
9.2 Data Packet Format	18
10. MATIP FORMAT FOR TYPE B TRAFFIC	19
10.1 Control packet format	19
10.1.1 Session Open format (SO)	19
10.1.2 Open confirm format (OC)	20
10.1.3 Session Close (SC)	21
10.2 Data packet format	21
11. SECURITY CONSIDERATIONS	22
12. AUTHOR'S ADDRESS	22
13. FULL COPYRIGHT STATEMENT	23

## 1. Introduction

The airline community has been using a worldwide data network for over 40 years, with two main types of traffic:

### Transactional traffic

This is used typically for communication between an airline office or travel agency and a central computer system for seat reservations and ticket issuing. A dumb terminal or a PC accesses the central system (IBM or UNISYS) through a data network.

This traffic is also called TYPE A and is based on real-time query/response with limited protection, high priority and can be discarded. The user can access only one predetermined central computer system. In case of no response (data loss), the user can duplicate the request.

### Messaging

This is an e-mail application where real-time is not needed. However a high level of protection is required. The addressing scheme uses an international format defined by IATA and contains the city and airline codes.

This traffic is also called TYPE B and is transmitted with a high level of protection, multi-addressing and 4 levels of priority.

The detailed formats for TYPE A and TYPE B messages are defined in the IATA standards.

At the bottom level, synchronous protocols have been built since 1960's and well before the OSI and SNA standards.

At present, there is a big number of legacy equipment installed in thousands of airline offices around the world. Many airlines do not have immediate plans to replace their terminals with more modern equipment using open standards. They are in search of more economical ways for connecting these terminals to the present reservation system.

Most airlines are willing to migrate from airline specific protocols to standardized protocols in order to benefit from the lower cost of new technologies, but the migration has been slow done to the following factors:

- Applications have not been migrated.
- Dumb terminals using airline protocols P1024B (IBM ALC) or P1024C (UNISYS UTS) are still numerous.

There are currently many different proprietary solutions based on gateways available to take advantage of low cost networking, but they are not scalable and cannot interact.

In the future, TCP/IP will be more commonly used as a common transport means for traffic types because:

- TCP/IP is the standard protocol of UNIX based applications
- TCP/IP stacks are inexpensive
- TCP/IP is used on intranets.

The purpose of this RFC is to define the mapping of the airline traffic types over TCP/IP. The airlines implementing it in their systems should have a TCP/IP stack to enable the traffic exchange below:



**BAUDOT**

Alphabet defined in ITU-T Number 5. BAUDOT uses 5 bits. Padded BAUDOT uses 7 bits with the Most significant bit (bit 7) for the parity and the bit 6 equal to 1.

**BATAP**

Type B Application to Application Protocol. Protocol to secure the TYPE B traffic. It was specified by SITA and is now published by IATA (SCR Vol. 3)

**EBCDIC**

Extended Binary Coded Decimal Interchange Code

**Flow ID Traffic**

Flow identifier used in host to host traffic to differentiate traffic flow types.

**HLD**

High Level Designator: Indicates the entry or exit point of a block in the network.

**IA**

Interchange Address: ASCU identifier in P1024B protocol.

**IATA**

International Air Transport Association

**IP**

Internet Protocol

**IPARS**

International Program Airline Reservation System: IPARS code is used in ALC

**HTH**

Host to Host (traffic).

**LSB**

Least Significant Bit

**MATIP**

Mapping of Airline Traffic over Internet Protocol

**MSB**

Most Significant Bit

**OC**

Open Confirm (MATIP command)

OSI  
Open Standard Interface

P1024B  
SITA implementation of the ALC, the IBM airlines specific protocol.  
It uses 6-bit padded characters (IPARS) and IA/ TA for physical  
addressing.

P1024C  
SITA implementation of the UTS, the UNISYS terminal protocol. It uses  
7-bit (ASCII) characters and RID/ SID for physical addressing.

RFU  
Reserved for Future Use

RID  
Remote Identifier: ASCU identifier in P1024C protocol.

SC  
Session Close (MATIP command)

SCR  
System and Communication Reference. (IATA document)

SID  
Station Identifier: Terminal identifier in P1024C protocol.

SITA  
Societe International de Telecommunications Aeronautiques

SO  
Session Open (MATIP command)

TA  
Terminal Address: Terminal identifier in P1024B protocol.

TCP  
Transport Control Protocol


TYPE A Traffic  
Interactive traffic or host to host

TYPE B Traffic  
Messaging traffic in IATA compliant format with high level of  
reliability

UTS  
Universal Terminal System by Unisys: (see P1024C)

### 3. LAYERING

MATIP is an end to end protocol. Its purpose is to have a mapping standard between the TCP layer and the airline application without any routing element.

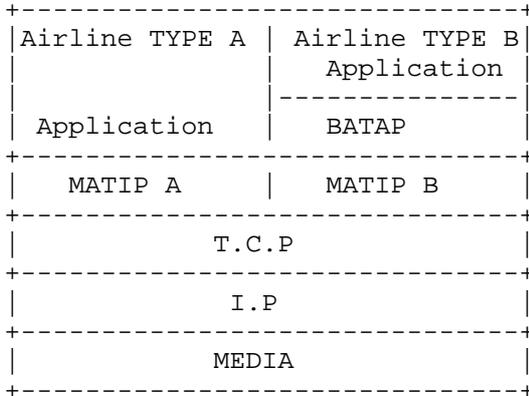

### 4. TRAFFIC IDENTIFICATION

In TYPE A conversational traffic, the airline host application recognizes the ASCU due to 4 bytes (H1, H2, A1, A2). These bytes are assigned by the host and are unique per ASCU. Thus, a host can dynamically recognize the ASCU independent of IP address.

H1 H2 A1 A2 bytes follow one of the three cases below:

- A1,A2 only are used and H1H2 is set to 0000.
- H1,H2 identify the session and A1A2 the ASCU inside the session.
- H1,H2,A1,A2 identify the ASCU.

The first two cases are fully compatible with the AX.25 mapping where H1H2 may be equivalent to the HLD of the concentrator, i.e., 2 bytes hexadecimal. The third rule allows more flexibility but is not compatible with AX.25.

In TYPE A host to host traffic the identification field is also present and is equal to 3 bytes H1 H2 Flow ID (optional). H1H2 are reserved for remote host identification (independently of the IP address) and must be allocated bilaterally.

In Type B traffic, identification of End Systems may be carried out by the use of HLDs, or directly by the pair of IP addresses.

## 5. TCP PORT ALLOCATION

IANA (Internet Assigned Numbers Authority) has allocated the following ports for MATIP TYPE A and TYPE B traffic:

- MATIP Type A TCP port = 350
- MATIP Type B TCP port = 351

Therefore the traffic type A or B is selected according to the TCP port.

## 6. MATIP SESSION ESTABLISHMENT

Prior to any exchange between two applications, a single MATIP session is established above the TCP connection in order to identify the traffic characteristic such as:

- Subtype of traffic for TYPE A (Type A host to host or Type A conversational )
- Multiplexing used (for Type A)
- Data header
- Character set

A separate session and TCP connection must be established for each set of parameters (e.g., P1024B, P1024C traffic between two points needs two separate sessions).

The establishment of a MATIP session can be initiated by either side. No keep-alive mechanism is defined at MATIP level. Session time out relies on the TCP time-out parameters.

There are three commands defined to manage the MATIP session:

- Session Open (SO) to open a session.
- Open Confirm (OC) to confirm the SO command.
- Session close (SC) to close the current session.


A MATIP session can be up only if the associated TCP connection is up. However it is not mandatory to close the TCP connection when closing the associated MATIP session.

Typical exchange is:

```

                TCP session establishment

Session Open ----->
                <----- Open confirm
                data exchange
----->
```

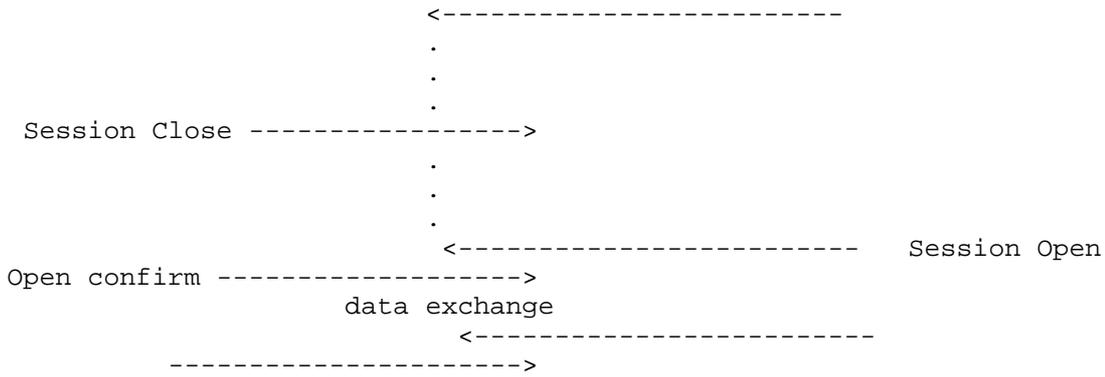

The Session Open command may contain configuration elements. An Session Open command received on a session already opened (i.e., same IP address and port number) will automatically clear the associated configuration and a new configuration will be set up according to the information contained in the new open session command.

As illustrated above, the open and close commands are symmetrical.


For type A conversational traffic, the SO and OC commands contain information for the identification of the ASCUs and the session. ASCUs are identified within a session by two or 4 bytes. A flag is set to indicate if the ASCU is identified by 4 bytes (H1H2A1A2) or by 2 bytes (A1A2). In the latter case, H1H2 is reserved for session identification.

The SO command is sent to open the MATIP session. In Type A conversational it may contains the list of ASCUs configured in this session.

The OC command confirms the SO command. It can refuse or accept it, totally or conditionally. In Type A, it contains the list of the ASCUs either rejected or configured in the session.

7. OVERALL PACKET FORMAT FOR TYPE A & TYPE B

The first 4 bytes of the MATIP header follow the following rules.

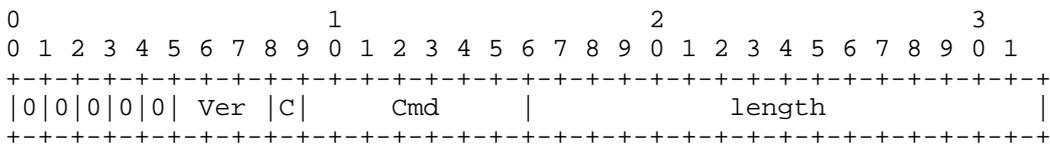

Ver

The 'Ver' (Version) field represents the version of the MATIP. It must contain the value 001 otherwise the packet is considered as invalid.

C

Identifies a CONTROL packet.

When set to 1, the packet is a Control packet

When set to 0, the packet is a Data packet

Cmd

This field identifies the control command if the flag C is set to 1.

Length

This field indicates the number of bytes of the whole packet, header included.

Notes : Fields identified as optional (Opt) are not transmitted if not used.


8. MATIP FORMAT FOR TYPE A CONVERSATIONAL TRAFFIC

8. 1 Control Packet Format

There are 3 control packets to open or close the session at the MATIP level.

8.1.1 Session Open format (SO)

To be able to identify the session and before sending any data packets, a Session Open command is sent. It can be initiated by either side. In case of collision, the open session from the side having the lower IP address is ignored.

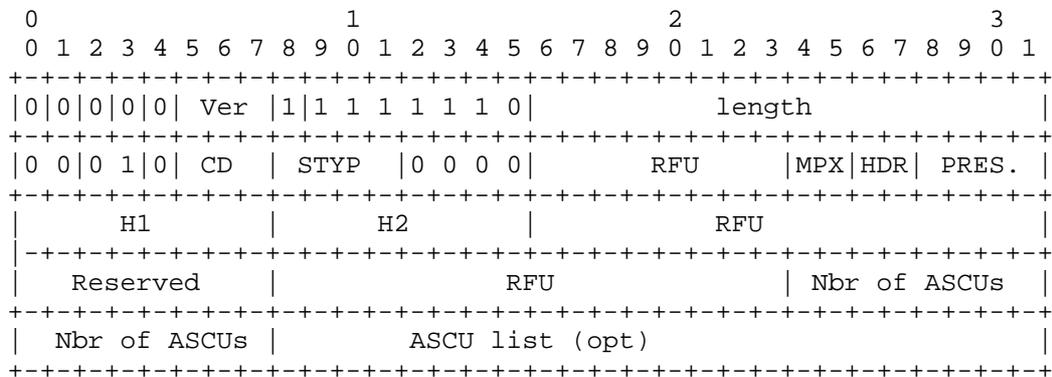

## RFU

Reserved for future use. Must be set to zero.

## CD

This field specifies the Coding

000 : 5 bits (padded baudot)  
 010 : 6 bits (IPARS)  
 100 : 7 bits (ASCII)  
 110 : 8 bits (EBCDIC)  
 xx1 : R.F.U

## STYP

This is the traffic subtype (type being TYPE A).

0001 : TYPE A Conversational

## MPX

This flag specifies the multiplexing used within the TCP session.

Possible values are:

00 : Group of ASCU with 4 bytes identification per ASCU (H1H2A1A2)  
 01 : Group of ASCUs with 2 bytes identification per ASCU (A1A2)  
 10 : single ASCU inside the TCP session.

## HDR

This field specifies which part of the airline's specific address is placed ahead of the message texts transmitted over the session.

Possible values are:

00 : ASCU header = H1+H2+A1+A2  
 01 : ASCU Header = A1+A2  
 10 : No Header  
 11 : Not used

The MPX and HDR must be coherent. When ASCUs are multiplexed, the data must contain the ASCU identification. The table below summarizes the allowed combinations:

	MPX	00	01	10
HDR				
00		Y	Y	Y
01		N	Y	Y
10		N	N	Y

PRES

This field indicates the presentation format

- 0001 : P1024B presentation
- 0010 : P1024C presentation
- 0011 : 3270 presentation

H1 H2

These fields can logically identify the session if MPX is not equal to 00. When this field is not used, it must be set to 0. If used in session (MPX <> 0) with HDR=00, H1H2 in data packet must have the same value as set in SO command.

Nbr of ASCUs

Nbr\_of\_ASCUs field is mandatory and gives the number of ASCUs per session. A 0 (zero) value means unknown. In this case the ASCU list is not present in the 'Open Session' command and must be sent by the other end in the 'Open Confirm' command.

ASCU LIST


Contains the list of identifier for each ASCU. If MPX=00 it has a length of four bytes (H1H2A1A2) for each ASCU, otherwise it is two bytes (A1A2).

8.1.2 Open Confirm format (OC)

The OC (Open Confirm) command is a response to an SO (Session Open) command and is used to either refuse the session or accept it conditionally upon checking hte configuration of each ASCU.

In case of acceptance, the OC indicates the number and the address of the rejected ASCUs, if any. Alternatively, it indicates the list of ASCUs configured for that MATIP session if the list provided by the SO command was correct or the number of ASCUs configured in the session was unknown (n. of ASCU equals 0).

8.1.2.1 Refuse the connection

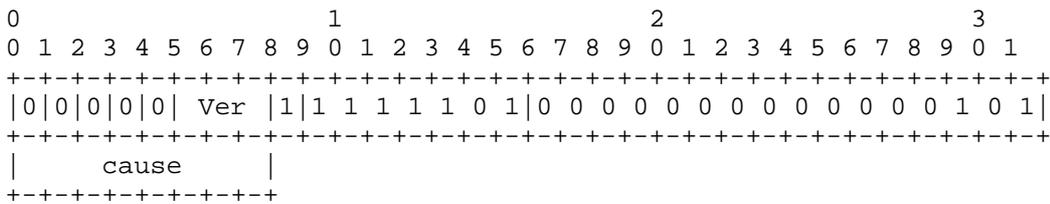

Cause

This field indicates the reason for the MATIP session refusal:

```

0 0 0 0 0 0 0 1 : No Traffic Type matching between Sender &
    Recipient
0 0 0 0 0 0 1 0 : Information in SO header incoherent

1 0 0 0 0 1 0 0
    up to      : Application dependent
1 1 1 1 1 1 1 1

```

Other values reserved.

8.1.2.2 Accept the connection

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|0|0|0|0|0|0| Ver |1|1 1 1 1 1 0 1|                length                |
+-----+-----+-----+-----+-----+-----+-----+-----+
|0 0 R 0 0 0 0 0 0| Nbr of ASCUs  |Nbr of ASCU(opt)|  ASCU LIST  |
+-----+-----+-----+-----+-----+-----+-----+-----+
|
+-----+-----+-----+-----+-----+-----+-----+-----+
|
+-----+-----+-----+-----+-----+-----+-----+-----+

```

R  
Flag indicating an error in the ASCU configuration provided in the SO command.


NBR of ASCUs  
If the MPX value is equal to 00 in the SO command, this field is two bytes long. Otherwise, it is one byte.  
If the R flag is set, the Nbr\_of\_ASCUs field represents the number of ASCUs in error. Otherwise, it indicates the number of ASCUs configured for that MATIP session.

Notes: The length of this field is either one or two bytes. In the SO command, the length is always two bytes. This discrepancy comes from backward compatibility with AX25 (see chapter 4). In the SO command, it is possible to use a free byte defined in the AX25 call user data. Unfortunately, there is no such free byte in the AX25 clear user data.

ASCU LIST  
Depending on the R flag, this field indicates the list of ASCUs (A1A2 or H1H2A1A2) either in error or within the session.

8.1.3 Session Close (SC)

The SC (Session Close) command is used to close an existing MATIP session.

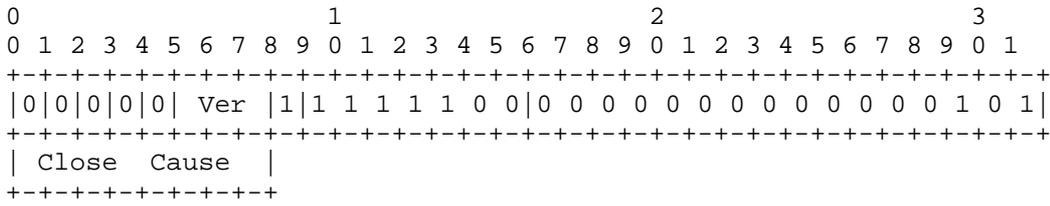


Close Cause

Indicates the reason for the session closure:

- 0 0 0 0 0 0 0 0 : Normal Close
- 1 0 0 0 0 1 0 0  
up to : Application dependent
- 1 1 1 1 1 1 1 1

Other values reserved.

8.2 Data Packet Format

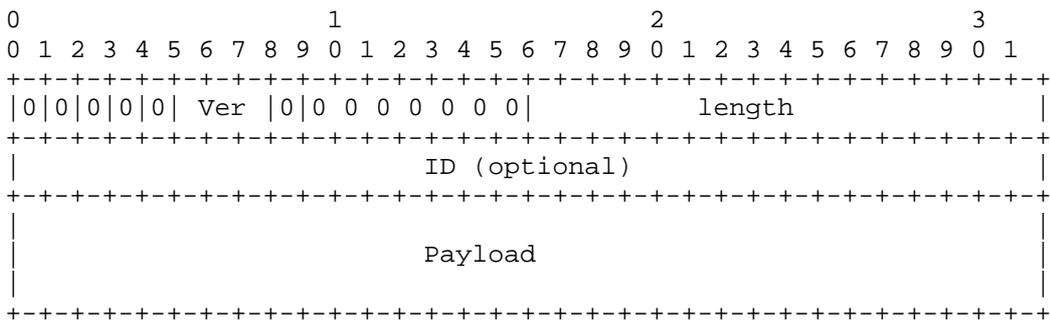

ID

This field is optional and has a different length and format according to the value of HDR, PRES indicated during the session establishment.

HDR	PRES = P1024B and 3270	PRES = P1024C
00	ID = 4 bytes H1-H2-A1-A2	ID = 5 bytes H1-H2-A1-0x01-A2
01	ID = 2 bytes A1-A2	ID = 3 bytes A1-0x01-A2
10	ID = 0 bytes	ID = 0 bytes

H1, H2 value must match the value given in the SO command if MPX is different from 0.

**Payload**

payload begins with the terminal identification:

- One byte Terminal identifier (TA) in P1024B
- Two bytes SID/DID Terminal identifier in P1024C.

**9. MATIP FORMAT FOR TYPE A HOST-TO-HOST TRAFFIC**

**9. 1 Control Packet Format**

There are 3 control packets to open or close the session at the MATIP level.

**9.1.1 Session Open format (SO)**

To be able to identify the session and before sending any data packet, a Session Open command is sent. It can be initiated by either side. In case of collision, the open session from the side having the lower IP address is ignored.

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
0 0 0 0 0  Ver										1 1 1 1 1 1 1 0										length																			
0 0 0 1 0  CD										STYP  0 0 0 0										RFU										MPX HDR 0 0 0 0									
H1										H2										RFU																			
-----																																							
Flow ID(opt)																																							
-----																																							

RFU  
Reserved for future use. Must be set to zero.

## CD

This field specifies the Coding, as defined in section 8.1.1.1.

## STYP

This is the traffic subtype (type being Type A).

0010 : TYPE A IATA Host to Host

1000 : SITA Host to Host

## MPX

This flag specifies the multiplexing used within the MATIP session in TYPE A SITA host to host. Possible values are:

00 : irrelevant

01 : multiple flow inside the TCP connection

10 : single flow inside the TCP connection

## HDR

This field specifies which part of the airline's specific address is placed ahead of the message text transmitted over the session.

Possible values are:

00 : used in TYPE A SITA Host to Host Header = H1+H2+Flow ID

01 : used in TYPE A SITA Host to Host Header = Flow ID

10 : No Header (default for IATA host to Host)

11 : Not used

The MPX and HDR must be coherent. When flow are multiplexed, the data must contain the flow identification. The table below summarizes the possible combinations:

	MPX	01	10
HDR			
00	Y	Y	
01	Y	Y	
10	N	Y	

## H1 H2

These fields can be used to identify the session. When this field is not used, it must be set to 0. If HDR=00, H1H2 in data packet must have the same value as set in SO command.

## Flow ID

This field is optional and indicates the Flow ID (range 3F - 4F Hex).

9.1.2 Open Confirm format (OC)

The OC (Open Confirm) command is a response to an SO (Session Open) command and is used to either refuse the session or accept it.

9.1.2.1 Refuse the connection

```

      0                1                2                3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
|0|0|0|0|0|0| Ver |1|1 1 1 1 1 0 1|0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 1|
+-----+-----+-----+-----+-----+-----+-----+-----+
|      cause      |
+-----+-----+-----+-----+-----+

```

Cause

This field indicates the reason for the MATIP session refusal

- 0 0 0 0 0 0 0 1 : No Traffic Type matching between Sender & Recipient
- 0 0 0 0 0 0 1 0 : Information in SO header incoherent
- 1 0 0 0 0 1 0 0 up to : Application dependent
- 1 1 1 1 1 1 1 1

Other values reserved.

9.1.2.2 Accept the connection

```

      0                1                2                3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
|0|0|0|0|0|0| Ver |1|1 1 1 1 1 0 1|0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 1|
+-----+-----+-----+-----+-----+-----+-----+-----+
|0 0 0 0 0 0 0 0|
+-----+-----+-----+-----+-----+

```

9.1.3 Session Close (SC)

The SC (Session Close) command is used to close an existing MATIP session.



Payload packet

The payload format is relevant to the MATIP layer. It is formatted according to the IATA host to host specifications and agreed bilaterally by the sender and the receiver.

10. MATIP FORMAT FOR TYPE B TRAFFIC

10.1 Control packet format

There are 3 control packets used to open or close the session at the MATIP level for exchanging Type B data

10.1.1 Session Open format (SO)

Before sending any data packets, it is recommended to let the systems establishing a session check that they are indeed able to communicate (i.e., Both systems agree on the characteristics of the traffic that will cross the connection). For this purpose, a two way handshake, using the Session commands defined hereafter, is performed immediately after the establishment of the TCP level connection. Either side can initiate this procedure. In case of collision, the open session from the side having the lower IP address is ignored.



Length

This field indicates the number of bytes of the whole command, header included. The only possible values are equal to 6 bytes or 10 bytes.

CD

This field specifies the Coding, as defined in section 8.1.1.1.

PROTEC

Identifies the end to end Messaging Responsibility Transfer protocol used.

0010: BATAP

All other values available.

BFLAG (X means 'do not care')

X X 0 0 means that the fields 'Sender HLD, Recipient HLD' do not exist in this packet. In this case, the exact length of the packet is 6 Bytes.

X X 1 0 means that the 'Sender HLD, Recipient HLD' are carried respectively in bytes 9,10 and 11,12 of this packet. In this case, the exact length of the packet is 10 Bytes.

0 0 X X means that the connection request has been transmitted from a host (Mainframe system)

0 1 X X means that the connection request has been transmitted from a gateway)


Sender HLD  
HLD of the Type B System sending the Session Open.

Recipient HLD  
HLD of the Type B system to which session opening is destined.

10.1.2 Open confirm format (OC)

The OC (Open Confirm) command is a response to an SO (Session Open) command and is used to either refuse the session or accept it.

10.1.2.1 Refuse the connection

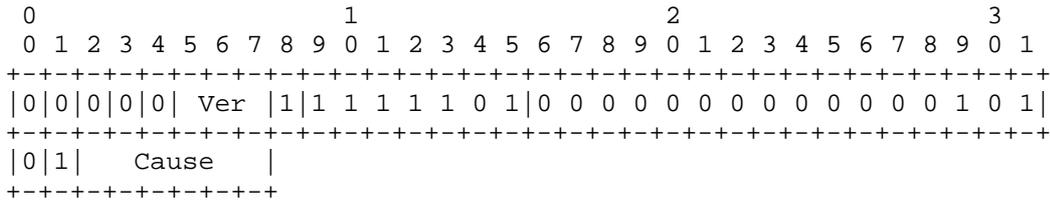


Length of this packet is 5 Bytes.

Cause  
Indicates the cause of the rejection

- 0 0 0 0 0 1 : No Traffic Type matching between Sender & Recipient
- 0 0 0 0 1 0 : Information in SO header incoherent
- 0 0 0 0 1 1 : Type of Protection mechanism are different
- 0 0 0 1 0 0 up to 1 1 1 1 1 1 : R.F.U


10.1.2.2 Accept the connection

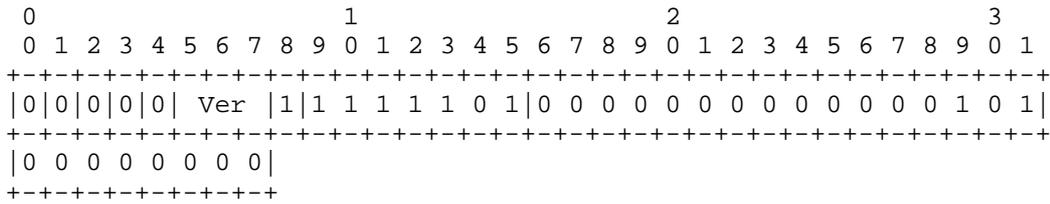

Length of this packet is 5 Bytes.

10.1.3 Session Close (SC)

The SC (Session Close) command is used to close an existing MATIP session.

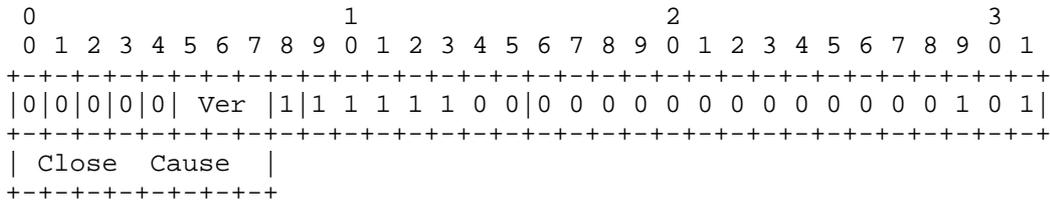

Close Cause


Indicates the reason for the session closure:

0 0 0 0 0 0 0 0 : Normal Close

1 0 0 0 0 1 0 0 up to 1 1 1 1 1 1 1 1 : Application dependent

Other values reserved

10.2 Data packet format

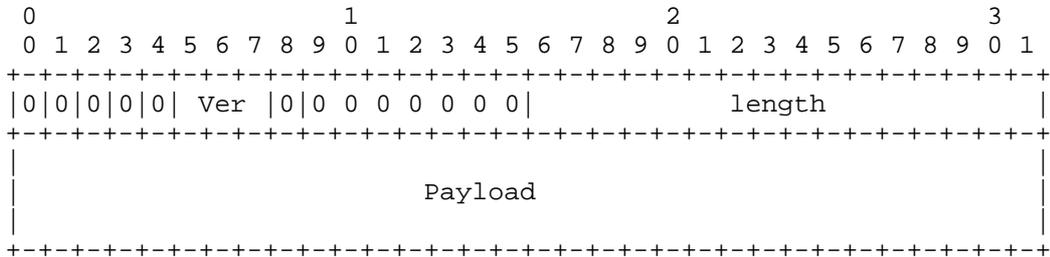

Length

This field indicates the number of bytes of the whole packet, header included.

#### Payload

Type B message formatted according to the IATA standard and conforming to the rules of the accessed TYPE B service

### 11. Security Considerations

The security is a very sensitive point for airline industry. Security for the MATIP users can take place at different levels:

The ASCU must be defined to enable the session with the host application. The control can be achieved in two ways: either the ASCU address (H1 H2 A1 A2) is defined at the application level by the means of a static configuration, or the ASCU is identified by a User ID / password. In most cases, the User ID and Password are verified by a dedicated software running in the central host. But they can also be checked by the application itself.

The MATIP sessions being transported over TCP/IP, It can go through a firewall. Depending on the firewall level, the control can be performed at network (IP addresses) or TCP application layer.

For higher level of security all compliant implementations MAY implement IPSEC ESP for securing control packets. Replay protection, the compulsory cipher suite for IPSEC ESP, and NULL encryption MAY be implemented. Optionally, IPSEC AH MAY also be supported. All compliant implementations MAY also implement IPSEC ESP for protection of data packets. Replay prevention and integrity protection using IPSEC ESP mandated cipher suit MAY be implemented. NULL encryption also MAY be supported. Other IPSEC ESP required ciphers MAY also be supported.

### 12. Author's Address

Alain Robert  
S.I.T.A.  
18, rue Paul Lafargue  
92904 PARIS LA DEFENSE 10  
FRANCE

Phone: 33 1 46411491  
Fax: 33 1 46411277  
EMail: arobert@par1.par.sita.int

## 13. Full Copyright Statement

Copyright (C) The Internet Society (1998). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

